




TRANSMITTAL NOTE

NEW EDITIONS OF ANNEXES TO THE CONVENTION ON INTERNATIONAL CIVIL AVIATION

It has come to our attention that when a new edition of an Annex is published, users have been discarding, along with the previous edition of the Annex, the **Supplement** to the previous edition. Please note that the Supplement to the previous edition should be retained until a new Supplement is issued.

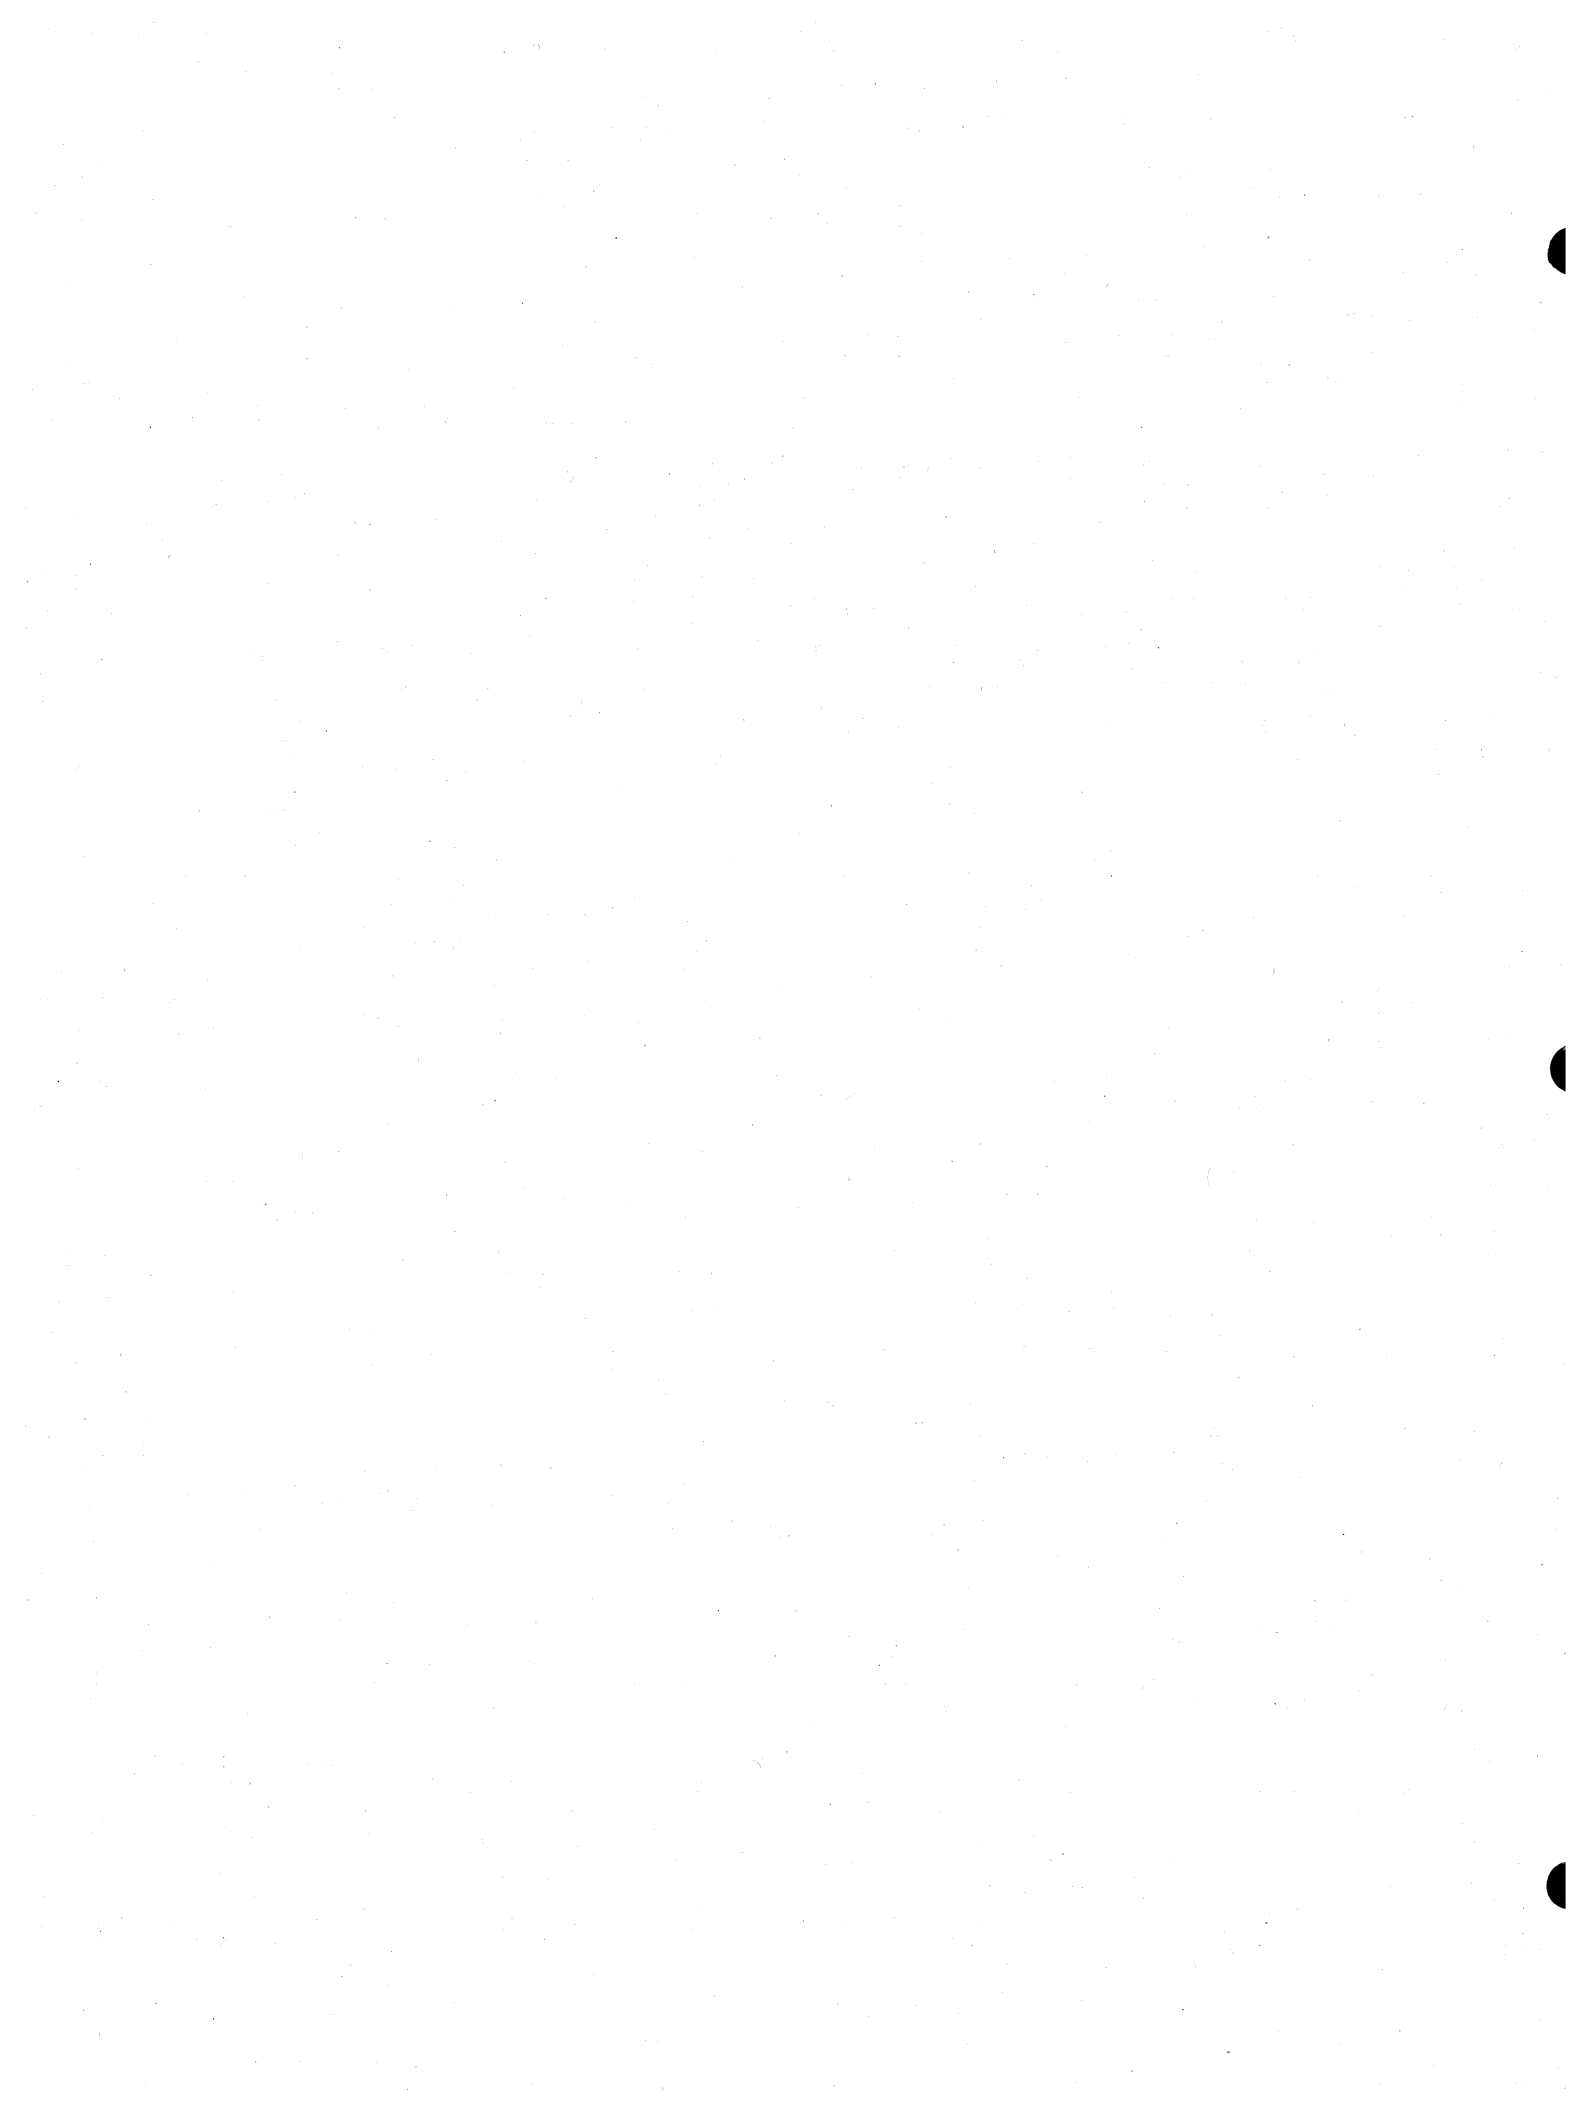

**International Standards and
Recommended Practices**



**Annex 16
to the Convention on
International Civil Aviation**

Environmental Protection

**Volume I
Aircraft Noise**

**This edition incorporates all amendments
adopted by the Council prior to 8 March 2008
and supersedes, on 20 November 2008, all
previous editions of Annex 16, Volume I.**

**For information regarding the applicability
of the Standards and Recommended Practices,
see Foreword.**

**Fifth Edition
July 2008**

International Civil Aviation Organization

Published in separate English, French, Russian and Spanish editions by the
INTERNATIONAL CIVIL AVIATION ORGANIZATION
999 University Street, Montréal, Quebec, Canada H3C 5H7

For ordering information and for a complete listing of sales agents
and booksellers, please go to the ICAO website at www.icao.int

First edition 1981
Second edition 1988
Third edition 1993
Fourth edition 2005
Fifth edition 2008

Annex 16 — Environmental Protection
Volume I — Aircraft Noise

Order Number: AN16-1
ISBN 978-92-9231-108-7

© ICAO 2008

All rights reserved. No part of this publication may be reproduced, stored in a
retrieval system or transmitted in any form or by any means, without prior
permission in writing from the International Civil Aviation Organization.




TABLE OF CONTENTS

	<i>Page</i>
Foreword.....	(xi)
Part I. DEFINITIONS.....	I-1
Part II. AIRCRAFT NOISE CERTIFICATION.....	II-1-1
CHAPTER 1. Administration.....	II-1-1
CHAPTER 2. Subsonic jet aeroplanes — Application for Type Certificate submitted before 6 October 1977	II-2-1
2.1 Applicability	II-2-1
2.2 Noise evaluation measure	II-2-1
2.3 Noise measurement points	II-2-2
2.4 Maximum noise levels	II-2-2
2.5 Trade-offs.....	II-2-3
2.6 Test procedures	II-2-3
CHAPTER 3.	
1. Subsonic jet aeroplanes — Application for Type Certificate submitted on or after 6 October 1977 and before 1 January 2006	
2. Propeller-driven aeroplanes over 5 700 kg — Application for Type Certificate submitted on or after 1 January 1985 and before 17 November 1988	
3. Propeller-driven aeroplanes over 8 618 kg — Application for Type Certificate submitted on or after 17 November 1988 and before 1 January 2006.....	II-3-1
3.1 Applicability	II-3-1
3.2 Noise measurements	II-3-2
3.3 Noise measurement points	II-3-2
3.4 Maximum noise levels	II-3-3
3.5 Trade-offs.....	II-3-3
3.6 Noise certification reference procedures.....	II-3-4
3.7 Test procedures	II-3-6
CHAPTER 4.	
1. Subsonic jet aeroplanes — Application for Type Certificate submitted on or after 1 January 2006.....	II-4-1
2. Propeller-driven aeroplanes over 8 618 kg — Application for Type Certificate submitted on or after 1 January 2006	II-4-1
4.1 Applicability	II-4-1
4.2 Noise measurements	II-4-2
4.3 Reference noise measurement points	II-4-2

	<i>Page</i>
4.4 Maximum noise levels	II-4-2
4.5 Noise certification reference procedures	II-4-2
4.6 Test procedures	II-4-2
4.7 Recertification	II-4-2
 CHAPTER 5. Propeller-driven aeroplanes over 5 700 kg — Application for Type Certificate submitted before 1 January 1985.....	 II-5-1
5.1 Applicability	II-5-1
5.2 Noise measurements	II-5-2
5.3 Noise measurement points	II-5-2
5.4 Maximum noise levels	II-5-3
5.5 Trade-offs.....	II-5-3
5.6 Noise certification reference procedures.....	II-5-3
5.7 Test procedures	II-5-5
 CHAPTER 6. Propeller-driven aeroplanes not exceeding 8 618 kg — Application for Type Certificate submitted before 17 November 1988.....	 II-6-1
6.1 Applicability	II-6-1
6.2 Noise evaluation measure	II-6-1
6.3 Maximum noise levels	II-6-1
6.4 Noise certification reference procedures.....	II-6-2
6.5 Test procedures	II-6-2
 CHAPTER 7. Propeller-driven STOL aeroplanes	 II-7-1
 CHAPTER 8. Helicopters.....	 II-8-1
8.1 Applicability	II-8-1
8.2 Noise evaluation measure	II-8-1
8.3 Reference noise measurement points	II-8-1
8.4 Maximum noise levels	II-8-2
8.5 Trade-offs.....	II-8-3
8.6 Noise certification reference procedures.....	II-8-3
8.7 Test procedures	II-8-5
 CHAPTER 9. Installed auxiliary power units (APU) and associated aircraft systems during ground operations.....	 II-9-1
 CHAPTER 10. Propeller-driven aeroplanes not exceeding 8 618 kg — Application for Type Certificate or derived version submitted on or after 17 November 1988	 II-10-1
10.1 Applicability	II-10-1
10.2 Noise evaluation measure	II-10-1
10.3 Reference noise measurement points	II-10-1
10.4 Maximum noise levels	II-10-2
10.5 Noise certification reference procedures.....	II-10-2
10.6 Test procedures	II-10-3

	<i>Page</i>
CHAPTER 11. Helicopters not exceeding 3 175 kg maximum certificated take-off mass	II-11-1
11.1 Applicability	II-11-1
11.2 Noise evaluation measure	II-11-1
11.3 Reference noise measurement point.....	II-11-1
11.4 Maximum noise level.....	II-11-2
11.5 Noise certification reference procedure	II-11-2
11.6 Test procedures	II-11-3
CHAPTER 12. Supersonic aeroplanes	II-12-1
12.1 Supersonic aeroplanes — application for Type Certificate submitted before 1 January 1975.....	II-12-1
12.2 Supersonic aeroplanes — application for Type Certificate submitted on or after 1 January 1975	II-12-1
CHAPTER 13. Tilt-rotor aircraft.....	II-13-1
Part III. NOISE MEASUREMENT FOR MONITORING PURPOSES.....	III-1
Part IV. ASSESSMENT OF AIRPORT NOISE.....	IV-1
Part V. BALANCED APPROACH TO NOISE MANAGEMENT	V-1

APPENDICES


APPENDIX 1. Evaluation method for noise certification of subsonic jet aeroplanes — Application for Type Certificate submitted before 6 October 1977	APP 1-1
1. Introduction	APP 1-1
2. Noise certification test and measurement conditions	APP 1-1
3. Measurement of aeroplane noise received on the ground.....	APP 1-3
4. Calculation of effective perceived noise level from measured noise data	APP 1-6
5. Reporting of data to the certifying authority and correcting measured data	APP 1-16
6. Nomenclature	APP 1-18
7. Mathematical formulation of noise tables.....	APP 1-24
8. Sound attenuation in air.....	APP 1-28
9. Detailed correction procedures.....	APP 1-34
APPENDIX 2. Evaluation method for noise certification of:	
1. Subsonic jet aeroplanes — Application for Type Certificate submitted on or after 6 October 1977	
2. Propeller-driven aeroplanes over 5 700 kg — Application for Type Certificate submitted on or after 1 January 1985 and before 17 November 1988	
3. Propeller-driven aeroplanes over 8 618 kg — Application for Type Certificate submitted on or after 17 November 1988	
4. Helicopters.....	APP 2-1
1. Introduction	APP 2-1
2. Noise certification test and measurement conditions	APP 2-2
3. Measurement of aircraft noise received on the ground.....	APP 2-5

	<i>Page</i>
4. Calculation of effective perceived noise level from measured noise data	APP 2-13
5. Reporting of data to the certifying authority	APP 2-21
6. Nomenclature: symbols and units	APP 2-23
7. Sound attenuation in air	APP 2-26
8. Adjustment of helicopter flight test results	APP 2-28
9. Adjustment of aeroplane flight test results	APP 2-35
 APPENDIX 3. Noise evaluation method for noise certification of propeller-driven aeroplanes not exceeding 8 618 kg — Application for Type Certificate submitted before 17 November 1988	 APP 3-1
1. Introduction	APP 3-1
2. Noise certification test and measurement conditions	APP 3-1
3. Measurement of aeroplane noise received on the ground	APP 3-2
4. Reporting of data to the certifying authority and correction of measured data	APP 3-4
 APPENDIX 4. Evaluation method for noise certification of helicopters not exceeding 3 175 kg maximum certificated take-off mass	 APP 4-1
1. Introduction	APP 4-1
2. Noise certification test and measurement conditions	APP 4-1
3. Noise unit definition	APP 4-3
4. Measurement of helicopter noise received on the ground	APP 4-3
5. Adjustment to test results	APP 4-5
6. Reporting of data to the certifying authority and validity of results	APP 4-6
 APPENDIX 5. Monitoring aircraft noise on and in the vicinity of aerodromes	 APP 5-1
1. Introduction	APP 5-1
2. Definition	APP 5-1
3. Measurement equipment	APP 5-1
4. Field equipment installation	APP 5-4
 APPENDIX 6. Noise evaluation method for noise certification of propeller-driven aeroplanes not exceeding 8 618 kg — Application for Type Certificate submitted on or after 17 November 1988	 APP 6-1
1. Introduction	APP 6-1
2. Noise certification test and measurement conditions	APP 6-1
3. Noise unit definition	APP 6-2
4. Measurement of aeroplane noise received on the ground	APP 6-3
5. Adjustment to test results	APP 6-5
6. Reporting of data to the certifying authority and validity of results	APP 6-8

ATTACHMENTS

ATTACHMENT A. Equations for the calculation of noise levels as a function of take-off mass	ATT A-1
ATTACHMENT B. Guidelines for noise certification of propeller-driven STOL aeroplanes	ATT B-1
ATTACHMENT C. Guidelines for noise certification of installed auxiliary power units (APU) and associated aircraft systems during ground operation	ATT C-1

	<i>Page</i>
ATTACHMENT D. Guidelines for evaluating an alternative method of measuring helicopter noise during approach.....	ATT D-1
ATTACHMENT E. Applicability of Annex 16 noise certification Standards for propeller-driven aeroplanes.....	ATT E-1
ATTACHMENT F. Guidelines for noise certification of tilt-rotor aircraft.....	ATT F-1
ATTACHMENT G. Guidelines for the administration of noise certification documentation.....	ATT G-1
ATTACHMENT H. Guidelines for obtaining helicopter noise data for land-use planning purposes.....	ATT H-1



FOREWORD

Historical background

Standards and Recommended Practices for Aircraft Noise were first adopted by the Council on 2 April 1971 pursuant to the provisions of Article 37 of the Convention on International Civil Aviation (Chicago, 1944) and designated as Annex 16 to the Convention. The Annex was developed in the following manner:

The Sixteenth Session of the Assembly, Buenos Aires, September 1968, adopted the following Resolution:

A16-3: Aircraft Noise in the Vicinity of Airports

Whereas the problem of aircraft noise is so serious in the vicinity of many of the world's airports that public reaction is mounting to a degree that gives cause for great concern and requires urgent solution;

Whereas the noise that concerns the public and civil aviation today is being caused by increase in traffic of existing aircraft;

Whereas the introduction of future aircraft types could increase and aggravate this noise unless action is taken to alleviate the situation;

Whereas the Fifth Air Navigation Conference of ICAO held in Montreal in November 1967 made certain recommendations, based on the principal conclusions of the International Conference on the Reduction of Noise and Disturbance Caused by Civil Aircraft ("The London Noise Conference") held in London in November 1966, with the object of reaching international solutions to the problem through the machinery of ICAO; and

Whereas the Assembly has noted the action being taken by the Council, in consultation with States and the appropriate international organizations, to give effect to the recommendations of the Fifth Air Navigation Conference, as reported to the Assembly by the Secretary General;

THE ASSEMBLY RESOLVES to instruct the Council:

- 1) to call an international conference within the machinery of ICAO as soon as practicable, bearing in mind the need for adequate preparation, to consider the problem of aircraft noise in the vicinity of airports;
- 2) to establish international specifications and associated guidance material relating to aircraft noise;
- 3) to include, in appropriate existing Annexes and other relevant ICAO documents and possibly in a separate Annex on noise, such material as the description and methods of measurement of aircraft noise and suitable limitations on the noise caused by aircraft that is of concern to communities in the vicinity of airports; and
- 4) to publish such material on a progressive basis, commencing at the earliest possible time.

In response to Assembly Resolution A16-3, a Special Meeting on Aircraft Noise in the Vicinity of Aerodromes was convened in Montréal (November–December 1969) to examine the following aspects related to the problems of aircraft noise:

- a) procedures for describing and measuring aircraft noise;
- b) human tolerance to aircraft noise;

- c) aircraft noise certification;
- d) criteria for establishment of aircraft noise abatement operating procedures;
- e) land-use control; and
- f) ground run-up noise abatement procedures.

Based on the recommendations of the Special Meeting on Aircraft Noise in the Vicinity of Aerodromes, draft International Standards and Recommended Practices for Aircraft Noise were developed and, after amendment following the usual consultation with the Contracting States of the Organization, were adopted by the Council to form the text of this Annex.

With the development of Standards and Recommended Practices dealing with the control of aircraft engine emissions, it was felt that all provisions relating to environmental aspects of aviation should be included in a single document. Accordingly, as part of the Resolution adopting Amendment 5, it was agreed that Annex 16 should be retitled as “Environmental Protection” and Volume I of the Annex should contain the existing provisions (Third Edition) of Annex 16 — *Aircraft Noise* as amended by Amendment 5, and Volume II should contain the provisions related to aircraft engine emissions.

Several Assembly and Council sessions have addressed the issue of aircraft noise since the Special Meeting on Aircraft Noise in the Vicinity of Aerodromes, focusing on the various aspects related to the problems of aircraft noise identified at the Special Meeting. The Thirty-third Session of the Assembly, Montréal, 25 September to 5 October 2001, in Resolution A33-7, issued a Consolidated Statement of Continuing ICAO Policies and Practices Related to Environmental Protection to, in significant part, “incorporate new ICAO policies and guidance material regarding aircraft noise” and to reflect the concept of a “balanced approach” to noise management, which had developed over time.

As defined in Appendix C to Assembly Resolution A33-7, the balanced approach to noise management consists of identifying the noise problem at an airport and then analysing the various measures available to reduce noise through the exploration of four principal elements, namely reduction at source, land-use planning and management, noise abatement operational procedures and operating restrictions, with the goal of addressing the noise problem in the most cost-effective manner.

In addition to providing additional detail on the balanced approach concept, Assembly Resolution A33-7 urges States to adopt a balanced approach to noise management.

The principal elements of the balanced approach are addressed in various places in Annex 16, Volume I, and in guidance adopted by ICAO. Reduction of noise at source through aircraft noise certification is addressed in Annex 16, Volume I, Part II. References to the other elements of the balanced approach are contained in Part V.

Table A shows the origin of amendments to the Annex over time together with a list of the principal subjects involved and the dates on which the Annex and the amendments were adopted by the Council, when they became effective and when they became applicable.

Applicability

Part I of Volume I of Annex 16 contains definitions and Part II contains Standards, Recommended Practices and guidelines for noise certification applicable to the classification of aircraft specified in individual chapters of that part, where such aircraft are engaged in international air navigation.

Note.— Chapters 2 and 3 exclude jet aeroplanes having short take-off and landing (STOL) capabilities which, pending the development by ICAO of a suitable definition, are described for the purpose of this Annex as those requiring a runway (with no stopway or clearway) of 610 m or less at the maximum certificated mass for airworthiness.

Parts III, IV and V of Volume I of Annex 16 contain Standards and Recommended Practices and guidance material for use by States with a view to promoting uniformity in measurement of noise for monitoring purposes, assessing noise around airports, and regarding the balanced approach to noise management.

Action by Contracting States

Notification of differences. The attention of Contracting States is drawn to the obligation imposed by Article 38 of the Convention by which Contracting States are required to notify the Organization of any differences between their national regulations and practices and the International Standards contained in this Annex and any amendments thereto. Contracting States are invited to extend such notification to any differences from the Recommended Practices contained in this Annex, and any amendments thereto, when the notification of such differences is important for the safety of air navigation. Further, Contracting States are invited to keep the Organization currently informed of any differences which may subsequently occur, or of the withdrawal of any differences previously notified. A specific request for notification of differences will be sent to Contracting States immediately after the adoption of each amendment to this Annex.

The attention of States is also drawn to the provisions of Annex 15 related to the publication of differences between their national regulations and practices and the related ICAO Standards and Recommended Practices through the Aeronautical Information Service, in addition to the obligation of States under Article 38 of the Convention.

Use of the Annex text in national regulations. The Council, on 13 April 1948, adopted a resolution inviting the attention of Contracting States to the desirability of using in their own national regulations, as far as is practicable, the precise language of those ICAO Standards that are of a regulatory character and also of indicating departures from the Standards, including any additional national regulations that were important for the safety or regularity of international air navigation. Wherever possible, the provisions of this Annex have been written in such a way as to facilitate incorporation, without major textual changes, into national legislation.

Status of Annex components

An Annex is made up of the following component parts, not all of which, however, are necessarily found in every Annex; they have the status indicated:

1.— *Material comprising the Annex proper:*

- a) *Standards and Recommended Practices* adopted by the Council under the provisions of the Convention. They are defined as follows:

Standard: Any specification for physical characteristics, configuration, matériel, performance, personnel or procedure, the uniform application of which is recognized as necessary for the safety or regularity of international air navigation and to which Contracting States will conform in accordance with the Convention; in the event of impossibility of compliance, notification to the Council is compulsory under Article 38.

Recommended Practice: Any specification for physical characteristics, configuration, matériel, performance, personnel or procedure, the uniform application of which is recognized as desirable in the interest of safety, regularity or efficiency of international air navigation, and to which Contracting States will endeavour to conform in accordance with the Convention.

- b) *Appendices* comprising material grouped separately for convenience but forming part of the Standards and Recommended Practices adopted by the Council.

- c) *Provisions* governing the applicability of the Standards and Recommended Practices.
- d) *Definitions* of terms used in the Standards and Recommended Practices which are not self-explanatory in that they do not have accepted dictionary meanings. A definition does not have an independent status but is an essential part of each Standard and Recommended Practice in which the term is used, since a change in the meaning of the term would affect the specification.

2.— *Material approved by the Council for publication in association with the Standards and Recommended Practices:*

- a) *Forewords* comprising historical and explanatory material based on the action of the Council and including an explanation of the obligations of States with regard to the application of the Standards and Recommended Practices ensuing from the Convention and the Resolution of Adoption.
- b) *Introductions* comprising explanatory material introduced at the beginning of parts, chapters or sections of the Annex to assist in the understanding of the application of the text.
- c) *Notes* included in the text, where appropriate, to give factual information or references bearing on the Standards or Recommended Practices in question, but not constituting part of the Standards or Recommended Practices.
- d) *Attachments* comprising material supplementary to the Standards and Recommended Practices, or included as a guide to their application.

Selection of language

This Annex has been adopted in four languages — English, French, Russian and Spanish. Each Contracting State is requested to select one of those texts for the purpose of national implementation and for other effects provided for in the Convention, either through direct use or through translation into its own national language, and to notify the Organization accordingly.

Editorial practices

The following practice has been adhered to in order to indicate at a glance the status of each statement: *Standards* have been printed in light face roman; *Recommended Practices* have been printed in light face italics, the status being indicated by the prefix **Recommendation**; *Notes* have been printed in light italics, the status being indicated by the prefix *Note*.

It is to be noted that in the English text the following practice has been adhered to when writing the specifications: Standards employ the operative verb “shall” while Recommended Practices employ the operative verb “should”.

The units of measurement used in this document are in accordance with the International System of Units (SI) as specified in Annex 5 to the Convention on International Civil Aviation. Where Annex 5 permits the use of non-SI alternative units these are shown in parentheses following the basic units. Where two sets of units are quoted it must not be assumed that the pairs of values are equal and interchangeable. It may, however, be inferred that an equivalent level of safety is achieved when either set of units is used exclusively.

Any reference to a portion of this document which is identified by a number includes all subdivisions of that portion.

Coordination with ISO activity

In the provisions related to certification procedures, extensive use is made of the related specifications developed by the International Organization for Standardization (ISO) and the International Electrotechnical Commission (IEC). In most cases these specifications have been incorporated by direct reference. However, in some cases it has been found necessary to modify the specifications to suit ICAO requirements and in such cases the modified material is included in full in this document. The assistance provided by ISO in the development of detailed specifications is recognized.

Table A. Amendments to Annex 16

<i>Amendment</i>	<i>Source(s)</i>	<i>Subject(s)</i>	<i>Adopted Effective Applicable</i>
1st Edition	Special Meeting on Aircraft Noise in the Vicinity of Aerodromes (1969)		2 April 1971 2 August 1971 6 January 1972
1	First Meeting of the Committee on Aircraft Noise	Noise certification of future production and derived versions of subsonic jet aeroplanes and updating of terminology used to describe aircraft weight.	6 December 1972 6 April 1973 16 August 1973
2	Third Meeting of the Committee on Aircraft Noise	Noise certification of light propeller-driven aeroplanes and subsonic jet aeroplanes of 5 700 kg and less maximum certificated take-off weight and guidance on discharge of functions by States in the cases of lease, charter and interchange of aircraft.	3 April 1974 3 August 1974 27 February 1975
3 (2nd Edition)	Fourth Meeting of the Committee on Aircraft Noise	Noise certification standards for future subsonic jet aeroplanes and propeller-driven aeroplanes, other than STOL aeroplanes, and guidelines for noise certification of future supersonic aeroplanes, propeller-driven STOL aeroplanes and installed APUs and associated aircraft systems when operating on the ground.	21 June 1976 21 October 1976 6 October 1977
4 (3rd Edition)	Fifth Meeting of the Committee on Aircraft Noise	Introduction of a new parameter viz, number of engines in the noise certification standards for subsonic jet aeroplanes, improvements in detailed test procedures to ensure that the same level of technology is applied to all types of aircraft, and editorial changes to simplify the language and eliminate inconsistencies.	6 March 1978 6 July 1978 10 August 1978
5 (Annex 16, Volume I — 1st Edition)	Sixth Meeting of the Committee on Aircraft Noise	<ol style="list-style-type: none"> 1. Annex retitled <i>Environmental Protection</i> and to be issued in two volumes as follows: Volume I — <i>Aircraft Noise</i> (incorporating provisions in the third edition of Annex 16 as amended by Amendment 5) and Volume II — <i>Aircraft Engine Emissions</i>. 2. Introduction in Volume I of noise certification Standards for helicopters and for future production of existing SST aeroplanes, updating of guidelines for noise certification of installed APU and associated aircraft systems and editorial amendments including changes to units of measurement to bring the Annex in line with Annex 5 provisions. 	11 May 1981 11 September 1981 26 November 1981
1	Third Meeting of the Operations Panel	Introduction of SARPs for noise abatement operating procedures and transfer of detailed procedures to PANSOPS, Volume I.	30 March 1983 29 July 1983 24 November 1983
2	Seventh Meeting of the Committee on Aircraft Noise	<ol style="list-style-type: none"> a) improvements in the noise certification procedures; and b) relaxation of maximum noise limits for helicopters. 	6 March 1985 29 July 1985 21 November 1985
3 (Annex 16, Volume I — 2nd Edition)	First Meeting of the Committee on Aviation Environmental Protection; study by the Air Navigation Commission following a recommendation of the Obstacle Clearance Panel	<ol style="list-style-type: none"> a) further improvements in the noise certification procedures; b) introduction of a new Chapter 10 for propeller-driven aeroplanes not exceeding 9 000 kg maximum certificated take-off mass; and c) editorial changes in Part V cross-referencing the relevant provisions in the PANS-OPS (Doc 8168). 	4 March 1988 31 July 1988 17 November 1988

<i>Amendment</i>	<i>Source(s)</i>	<i>Subject(s)</i>	<i>Adopted Effective Applicable</i>
4 (3rd Edition)	Second Meeting of the Committee on Aviation Environmental Protection; Seventh Meeting of the Committee on Aircraft Noise; and Fifth Meeting of the Operations Panel	a) improvements in the noise certification procedures;	24 March 1993
		b) introduction of a new Chapter 11 for light helicopters;	26 July 1993
		c) expansion of Appendix 2 to include helicopters and replacement of Appendix 4; and	11 November 1993
		d) introduction of guidance on applicability.	
5	Third Meeting of the Committee on Aviation Environmental Protection	a) simplification and clarification of the noise certification schemes in Chapter 3 for propeller-driven aircraft;	19 March 1997
		b) harmonization of the helicopter Standards in Chapters 8 and 11 with national codes; and	21 July 1997
		c) alignment of the take-off mass in Chapter 10 with airworthiness limits.	6 November 1997
6	Fourth Meeting of the Committee on Aviation Environmental Protection	a) introduction of a new definition for human performance in Chapter 1;	26 February 1999
		b) increase in stringency of Chapter 10 noise requirements for light single-engined propeller-driven aeroplanes;	19 July 1999
		c) changes of a detailed technical nature that are intended to improve the consistency of Chapters 3, 8 and 11 as well as Appendices 2 and 4;	4 November 1999
		d) new provisions concerning Human Factors in Part V; and	
		e) changes that have arisen from the ongoing harmonization of the European Joint Aviation Requirements (JARs) and the United States Federal Aviation Regulations (FARs).	
7	Fifth Meeting of the Committee on Aviation Environmental Protection; Annex 6, Amendment 26	a) increase in stringency of the turbojet and heavy propeller-driven aeroplane noise requirements (new Chapter 4 — existing Chapter 4 becomes Chapter 12);	29 June 2001
		b) new provision relating to the recertification of Chapter 3 aeroplanes;	29 October 2001
		c) increase in stringency of the helicopter noise requirements of Chapters 8 and 11;	21 March 2002
		d) change to clarify or redefine existing certification procedures, align with harmonized JAR/FAR requirements, introduce new provisions relating to digital instrumentation;	
		e) introduction of guidance material on tilt-rotor aircraft noise certification; and	
		f) inclusion of an English language version of the noise certification documents.	

<i>Amendment</i>	<i>Source(s)</i>	<i>Subject(s)</i>	<i>Adopted Effective Applicable</i>
8 (4th Edition)	Sixth Meeting of the Committee on Aviation Environmental Protection	<ul style="list-style-type: none"> a) ambient noise correction procedure including definitions for “background noise”, “ambient noise” and “broadband noise”; b) allowable wind speed limits during testing; c) applicability language clarification including temporary changes in type design and provisions to allow the recertification of Chapter 5 aeroplanes to Chapter 4; d) rotorcraft-related technical issues; and e) new Attachments G and H containing guidelines for the administration of noise certification documentation and guidelines for obtaining helicopter noise data for land-use planning purposes, respectively. 	<ul style="list-style-type: none"> 23 February 2005 11 July 2005 24 November 2005
9 (5th Edition)	Seventh Meeting of the Committee on Aviation Environmental Protection	<ul style="list-style-type: none"> a) introduction of new text to Attachment H containing guidelines for obtaining helicopter noise data for land-use planning purposes by providing the option for additional microphone positions; b) change to Note 2 of the definition of “derived version of a helicopter” to clarify that it applies to Chapter 11 as well as Chapter 8 helicopters; c) noise certification procedures for helicopters amended to ensure that the maximum operational rotor speed will be used; d) clarification of the definitions relating to wind speeds during tests; e) update of the International Electrotechnical Commission (IEC) references; f) clarification regarding the increment to be added to the V_2 speed to determine the climb speed to be used during certification training; g) amendment of the applicability provisions to align them with similar provisions in other ICAO documents; and h) minor editorial changes. 	<ul style="list-style-type: none"> 7 March 2008 20 July 2008 20 November 2008

INTERNATIONAL STANDARDS AND RECOMMENDED PRACTICES

PART I. DEFINITIONS

Aeroplane. A power-driven heavier-than-air aircraft, deriving its lift in flight chiefly from aerodynamic reactions on surfaces which remain fixed under given conditions of flight.

Aircraft. Any machine that can derive support in the atmosphere from the reactions of the air other than the reactions of the air against the earth's surface.

Associated aircraft systems. Those aircraft systems drawing electrical/pneumatic power from an auxiliary power unit during ground operations.

Auxiliary power-unit (APU). A self-contained power-unit on an aircraft providing electrical/pneumatic power to aircraft systems during ground operations.

Bypass ratio. The ratio of the air mass flow through the bypass ducts of a gas turbine engine to the air mass flow through the combustion chambers calculated at maximum thrust when the engine is stationary in an international standard atmosphere at sea level.

Derived version of a helicopter. A helicopter which, from the point of view of airworthiness, is similar to the noise certificated prototype but incorporates changes in type design which may affect its noise characteristics adversely.

Note 1.— In applying the Standards of this Annex, a helicopter that is based on an existing prototype but which is considered by the certifying authority to be a new type design for airworthiness purposes shall nevertheless be considered as a derived version if the noise source characteristics are judged by the certifying authority to be the same as the prototype.

Note 2.— “Adversely” refers to an increase of more than 0.30 EPNdB in any one of the noise certification levels for helicopters certificated according to Chapter 8 and 0.30 dB(A) in the certification level for helicopters certificated according to Chapter 11.

Derived version of an aeroplane. An aeroplane which, from the point of view of airworthiness, is similar to the noise certificated prototype but incorporates changes in type design which may affect its noise characteristics adversely.

Note 1.— Where the certifying authority finds that the proposed change in design, configuration, power or mass is so extensive that a substantially new investigation of compliance with the applicable airworthiness regulations is required, the aeroplane should be considered to be a new type design rather than a derived version.

Note 2.— “Adversely” refers to an increase of more than 0.10 dB in any one of the noise certification levels unless the cumulative effects of changes in type design are tracked by an approved procedure in which case “adversely” refers to a cumulative increase in the noise level in any one of the noise certification levels of more than 0.30 dB or the margin of compliance, whichever is smaller.

External equipment (helicopter). Any instrument, mechanism, part, apparatus, appurtenance, or accessory that is attached to or extends from the helicopter exterior but is not used nor is intended to be used for operating or controlling a helicopter in flight and is not part of an airframe or engine.

Helicopter. A heavier-than-air aircraft supported in flight chiefly by the reactions of the air on one or more power-driven rotors on substantially vertical axes.

Human performance. Human capabilities and limitations which have an impact on the safety and efficiency of aeronautical operations.

Recertification. Certification of an aircraft with or without a revision to its certification noise levels, to a Standard different to that to which it was originally certificated.

Self-sustaining powered sailplane. A powered aeroplane with available engine power which allows it to maintain level flight but not to take off under its own power.

Subsonic aeroplane. An aeroplane incapable of sustaining level flight at speeds exceeding flight Mach number of 1.

PART II. AIRCRAFT NOISE CERTIFICATION

CHAPTER 1. ADMINISTRATION

1.1 The provisions of 1.2 to 1.6 shall apply to all aircraft included in the classifications defined for noise certification purposes in Chapters 2, 3, 4, 5, 6, 8, 10, 11 and 12 of this part where such aircraft are engaged in international air navigation.

1.2 Noise certification shall be granted or validated by the State of Registry of an aircraft on the basis of satisfactory evidence that the aircraft complies with requirements that are at least equal to the applicable Standards specified in this Annex.

1.3 If noise recertification is requested, it shall be granted or validated by the State of Registry of an aircraft on the basis of satisfactory evidence that the aircraft complies with requirements that are at least equal to the applicable Standards specified in this Annex. The date used by a certificating authority to determine the recertification basis shall be the date of acceptance of the first application for recertification.

1.4 The documents attesting noise certification shall be approved by the State of Registry and shall be required by that State to be carried on the aircraft.

Note.— See Annex 6, Part I, 6.13, concerning the translation into English of documents attesting noise certification.

1.5 The documents attesting noise certification for an aircraft shall provide at least the following information:

- Item 1. Name of State.
- Item 2. Title of the noise document.
- Item 3. Number of the document.
- Item 4. Nationality or common mark and registration marks.
- Item 5. Manufacturer and manufacturer's designation of aircraft.
- Item 6. Aircraft serial number.
- Item 7. Engine manufacturer, type and model.
- Item 8. Propeller type and model for propeller-driven aeroplanes.
- Item 9. Maximum take-off mass in kilograms.
- Item 10. Maximum landing mass, in kilograms, for certificates issued under Chapters 2, 3, 4, 5 and 12 of this Annex.
- Item 11. The chapter and section of this Annex according to which the aircraft was certificated.

- Item 12. Additional modifications incorporated for the purpose of compliance with the applicable noise certification Standards.
- Item 13. The lateral/full-power noise level in the corresponding unit for documents issued under Chapters 2, 3, 4, 5 and 12 of this Annex.
- Item 14. The approach noise level in the corresponding unit for documents issued under Chapters 2, 3, 4, 5, 8 and 12 of this Annex.
- Item 15. The flyover noise level in the corresponding unit for documents issued under Chapters 2, 3, 4, 5 and 12 of this Annex.
- Item 16. The overflight noise level in the corresponding unit for documents issued under Chapters 6, 8 and 11 of this Annex.
- Item 17. The take-off noise level in the corresponding unit for documents issued under Chapters 8 and 10 of this Annex.
- Item 18. Statement of compliance, including a reference to Annex 16, Volume I.
- Item 19. Date of issuance of the noise certification document.
- Item 20. Signature of the officer issuing it.

1.6 Item headings on the noise certification documents shall be uniformly numbered in Arabic numerals, as indicated in 1.5, so that on any noise certification document the number will, under any arrangement, refer to the same item heading, except where the information in Items 1 through 6 and Items 18 through 20 is given in the certificate of airworthiness, in which case the numbering system of the certificate of airworthiness according to Annex 8 shall prevail.

1.7 An administrative system for implementation of noise certification documentation shall be developed by the State of Registry.

Note.— See Attachment G for guidance on the format and structure of noise certification documentation.

1.8 Contracting States shall recognize as valid a noise certification granted by another Contracting State provided that the requirements under which such certification was granted are at least equal to the applicable Standards specified in this Annex.

1.9 A Contracting State shall suspend or revoke the noise certification of an aircraft on its register if the aircraft ceases to comply with the applicable noise Standards. The State of Registry shall not remove the suspension of a noise certification or grant a new noise certification unless the aircraft is found, on reassessment, to comply with the applicable noise Standards.

1.10 Unless otherwise specified in this volume of the Annex, the date to be used by Contracting States in determining the applicability of the Standards in this Annex shall be the date of application submitted to the State of Design for a type certificate, or the date of application under an equivalent prescribed procedure by the certificating authority of the State of Design. The application shall be effective for a duration equal to the period applied in the designation of the airworthiness regulations appropriate to the aircraft type, except in special cases where the certificating authority accepts an extension of this period.

1.11 When this period of effectivity is exceeded, the date to be used in determining the applicability of the Standards in this Annex shall be the date of issue of the type certificate, or the date of issue of approval under an equivalent prescribed procedure, less the duration of effectivity.

CHAPTER 2. SUBSONIC JET AEROPLANES — APPLICATION FOR TYPE CERTIFICATE SUBMITTED BEFORE 6 OCTOBER 1977

2.1 Applicability

Note.— See also Chapter 1, 1.10 and 1.11.

2.1.1 The Standards of this chapter shall be applicable to all subsonic jet aeroplanes for which either the application for a Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, before 6 October 1977, except those aeroplanes:

- a) requiring a runway length¹ of 610 m or less at maximum certificated mass for airworthiness; or
- b) powered by engines with a bypass ratio of 2 or more and for which a certificate of airworthiness for the individual aeroplane was first issued before 1 March 1972; or
- c) powered by engines with a bypass ratio of less than 2 and for which either the application for a Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, before 1 January 1969, and for which a certificate of airworthiness for the individual aeroplane was first issued before 1 January 1976.

2.1.2 The Standards of this chapter shall also be applicable to derived versions of all aeroplanes covered by 2.1.1 for which the application for certification of a change in type design was accepted, or another equivalent procedure was carried out by the certifying authority, on or after 26 November 1981.

2.1.3 Notwithstanding 2.1.1 and 2.1.2, it may be recognized by a Contracting State that the following situations for jet aeroplanes and propeller-driven heavy aeroplanes on its registry do not require demonstration of compliance with the provisions of the Standards of Annex 16, Volume I:

- a) gear down flight with one or more retractable landing gear down during the entire flight;
- b) spare engine and nacelle carriage external to the skin of the aeroplane (and return of the pylon or other external mount); and
- c) time-limited engine and/or nacelle changes, where the change in type design specifies that the aeroplane may not be operated for a period of more than 90 days unless compliance with the provisions of Annex 16, Volume I, is shown for that change in type design. This applies only to changes resulting from a required maintenance action.

2.2 Noise evaluation measure

The noise evaluation measure shall be the effective perceived noise level in EPNdB as described in Appendix 1.

1. With no stopway or clearway.

2.3 Noise measurement points

An aeroplane, when tested in accordance with the flight test procedures of 2.6, shall not exceed the noise levels specified in 2.4 at the following points:

- a) *lateral noise measurement point*: the point on a line parallel to and 650 m from the runway centre line, or extended runway centre line, where the noise level is a maximum during take-off;
- b) *flyover noise measurement point*: the point on the extended centre line of the runway and at a distance of 6.5 km from the start of roll; and
- c) *approach noise measurement point*: the point on the ground, on the extended centre line of the runway, 120 m (394 ft) vertically below the 3° descent path originating from a point 300 m beyond the threshold. On level ground this corresponds to a position 2 000 m from the threshold.

2.4 Maximum noise levels

2.4.1 The maximum noise levels of those aeroplanes covered by 2.1.1, when determined in accordance with the noise evaluation method of Appendix 1, shall not exceed the following:

- a) *at lateral and approach noise measurement points*: 108 EPNdB for aeroplanes with maximum certificated take-off mass of 272 000 kg or over, decreasing linearly with the logarithm of the mass at the rate of 2 EPNdB per halving of the mass down to 102 EPNdB at 34 000 kg, after which the limit remains constant;
- b) *at flyover noise measurement point*: 108 EPNdB for aeroplanes with maximum certificated take-off mass of 272 000 kg or over, decreasing linearly with the logarithm of the mass at the rate of 5 EPNdB per halving of the mass down to 93 EPNdB at 34 000 kg, after which the limit remains constant.

Note.— See Attachment A for equations for the calculation of noise levels as a function of take-off mass.

2.4.2 The maximum noise levels of those aeroplanes covered by 2.1.2, when determined in accordance with the noise evaluation method of Appendix 1, shall not exceed the following:

2.4.2.1 At lateral noise measurement point

106 EPNdB for aeroplanes with maximum certificated take-off mass of 400 000 kg or over, decreasing linearly with the logarithm of the mass down to 97 EPNdB at 35 000 kg, after which the limit remains constant.

2.4.2.2 At flyover noise measurement point

- a) *Aeroplanes with two engines or less*

104 EPNdB for aeroplanes with maximum certificated take-off mass of 325 000 kg or over, decreasing linearly with the logarithm of the mass at the rate of 4 EPNdB per halving of mass down to 93 EPNdB, after which the limit remains constant.

- b) *Aeroplanes with three engines*

As a) but with 107 EPNdB for aeroplanes with maximum certificated take-off mass of 325 000 kg or over

or

as defined by 2.4.1 b), whichever is the lower.

c) *Aeroplanes with four engines or more*

As a) but with 108 EPNdB for aeroplanes with maximum certificated take-off mass of 325 000 kg or over

or

as defined by 2.4.1 b), whichever is the lower.

2.4.2.3 *At approach noise measurement point*

108 EPNdB for aeroplanes with maximum certificated take-off mass of 280 000 kg or over, decreasing linearly with the logarithm of the mass down to 101 EPNdB at 35 000 kg, after which the limit remains constant.

Note.— See Attachment A for equations for the calculation of noise levels as a function of take-off mass.

2.5 Trade-offs

If the maximum noise levels are exceeded at one or two measurement points:

- a) the sum of excesses shall not be greater than 4 EPNdB, except that in respect of four-engined aeroplanes powered by engines with a bypass ratio of 2 or more and for which the application for a certificate of airworthiness for the prototype was accepted, or another equivalent prescribed procedure was carried out by the certifying authority, before 1 December 1969, the sum of any excesses shall not be greater than 5 EPNdB;
- b) any excess at any single point shall not be greater than 3 EPNdB; and
- c) any excesses shall be offset by corresponding reductions at the other point or points.

2.6 Test procedures

2.6.1 Take-off test procedure

2.6.1.1 Average take-off thrust² shall be used from the start of take-off to the point at which a height of at least 210 m (690 ft) above the runway is reached, and the thrust thereafter shall not be reduced below that thrust which will maintain a climb gradient of at least 4 per cent.

2.6.1.2 A speed of at least $V_2 + 19$ km/h ($V_2 + 10$ kt) shall be attained as soon as practicable after lift-off and be maintained throughout the take-off noise certification test.

2.6.1.3 A constant take-off configuration selected by the applicant shall be maintained throughout the take-off noise certification demonstration test except that the landing gear may be retracted.

2. Take-off thrust representative of the mean characteristics of the production engine.

2.6.2 Approach test procedure

2.6.2.1 The aeroplane shall be stabilized and following a $3^\circ \pm 0.5^\circ$ glide path.

2.6.2.2 The approach shall be made at a stabilized airspeed of not less than $1.3 V_S + 19$ km/h ($1.3 V_S + 10$ kt) with thrust stabilized during approach and over the measuring point and continued to a normal touchdown.

2.6.2.3 The configuration of the aeroplane shall be with maximum allowable landing flap setting.

Note. — *Guidance material on the use of equivalent procedures is provided in the Environmental Technical Manual on the Use of Procedures in the Noise Certification of Aircraft (Doc 9501).*

CHAPTER 3.

- 1.— **SUBSONIC JET AEROPLANES — Application for Type Certificate submitted on or after 6 October 1977 and before 1 January 2006**
- 2.— **PROPELLER-DRIVEN AEROPLANES OVER 5 700 kg — Application for Type Certificate submitted on or after 1 January 1985 and before 17 November 1988**
- 3.— **PROPELLER-DRIVEN AEROPLANES OVER 8 618 kg — Application for Type Certificate submitted on or after 17 November 1988 and before 1 January 2006**

3.1 Applicability

Note 1.— See also Chapter 1, 1.10 and 1.11.

Note 2.— See Attachment E for guidance on interpretation of these applicability provisions.

3.1.1 The Standards of this chapter shall be applicable to:

- a) all subsonic jet aeroplanes, including their derived versions, other than aeroplanes which require a runway¹ length of 610 m or less at maximum certificated mass for airworthiness, in respect of which either the application for a Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certificating authority, on or after 6 October 1977 and before 1 January 2006;
- b) all propeller-driven aeroplanes, including their derived versions, of over 5 700 kg maximum certificated take-off mass (except those described in Chapter 6, 6.1), for which either the application for a Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certificating authority, on or after 1 January 1985 and before 17 November 1988, except where the Standards of Chapter 10 apply; and
- c) all propeller-driven aeroplanes, including their derived versions, of over 8 618 kg maximum certificated take-off mass, for which either the application for a Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certificating authority, on or after 17 November 1988 and before 1 January 2006.

3.1.2 Notwithstanding 3.1.1, it may be recognized by a Contracting State that the following situations for jet aeroplanes and propeller-driven heavy aeroplanes on its registry do not require demonstration of compliance with the provisions of the Standards of Annex 16, Volume I:

- a) gear down flight with one or more retractable landing gear down during the entire flight;
- b) spare engine and nacelle carriage external to the skin of the aeroplane (and return of the pylon or other external mount); and

1. With no stopway or clearway.

- c) time-limited engine and/or nacelle changes, where the change in type design specifies that the aeroplane may not be operated for a period of more than 90 days unless compliance with the provisions of Annex 16, Volume I, is shown for that change in type design. This applies only to changes resulting from a required maintenance action.

3.2 Noise measurements

3.2.1 Noise evaluation measure

The noise evaluation measure shall be the effective perceived noise level in EPNdB as described in Appendix 2.

3.3 Noise measurement points

3.3.1 Reference noise measurement points

An aeroplane, when tested in accordance with these Standards, shall not exceed the noise levels specified in 3.4 at the following points:

a) *lateral full-power reference noise measurement point*

- 1) for jet-powered aeroplanes: the point on a line parallel to and 450 m from the runway centre line, where the noise level is a maximum during take-off;
- 2) for propeller-driven aeroplanes: the point on the extended centre line of the runway 650 m vertically below the climb-out flight path at full take-off power, as defined in 3.6.2. Until 19 March 2002, the requirement for lateral noise in 3.3.1 a) 1) shall alternatively be permitted;

Note.— For aeroplanes specified in 3.1.1 b) and for aeroplanes specified in 3.1.1 c) for which the application for a certificate of airworthiness for the prototype was accepted before 19 March 2002, the lateral noise requirement specified in 3.3.1 a) 1) is permitted as an alternative.

- b) *flyover reference noise measurement point*: the point on the extended centre line of the runway and at a distance of 6.5 km from the start of roll;
- c) *approach reference noise measurement point*: the point on the ground, on the extended centre line of the runway, 2 000 m from the threshold. On level ground this corresponds to a position 120 m (394 ft) vertically below the 3° descent path originating from a point 300 m beyond the threshold.

3.3.2 Test noise measurement points

3.3.2.1 If the test noise measurement points are not located at the reference noise measurement points, any corrections for the difference in position shall be made in the same manner as the corrections for the differences between test and reference flight paths.

3.3.2.2 Sufficient lateral test noise measurement points shall be used to demonstrate to the certifying authority that the maximum noise level on the appropriate lateral line has been clearly determined. For jet-powered aeroplanes simultaneous measurements shall be made at one test noise measurement point at a symmetrical position on the other side of the runway. In the

case of propeller-driven aeroplanes, because of their inherent asymmetry in lateral noise, simultaneous measurements shall be made at each and every test noise measurement point at a symmetrical position (within ± 10 m parallel with the axis of the runway) on the opposite side of the runway.

3.4 Maximum noise levels

3.4.1 The maximum noise levels, when determined in accordance with the noise evaluation method of Appendix 2, shall not exceed the following:

3.4.1.1 *At the lateral full-power reference noise measurement point*

103 EPNdB for aeroplanes with maximum certificated take-off mass, at which the noise certification is requested, of 400 000 kg and over and decreasing linearly with the logarithm of the mass down to 94 EPNdB at 35 000 kg, after which the limit remains constant.

3.4.1.2 *At flyover reference noise measurement point*

a) *Aeroplanes with two engines or less*

101 EPNdB for aeroplanes with maximum certificated take-off mass, at which the noise certification is requested, of 385 000 kg and over and decreasing linearly with the logarithm of the aeroplane mass at the rate of 4 EPNdB per halving of mass down to 89 EPNdB, after which the limit is constant.

b) *Aeroplanes with three engines*

As a) but with 104 EPNdB for aeroplanes with maximum certificated take-off mass of 385 000 kg and over.

c) *Aeroplanes with four engines or more*

As a) but with 106 EPNdB for aeroplanes with maximum certificated take-off mass of 385 000 kg and over.

3.4.1.3 *At approach reference noise measurement point*

105 EPNdB for aeroplanes with maximum certificated take-off mass, at which the noise certification is requested, of 280 000 kg or over, and decreasing linearly with the logarithm of the mass down to 98 EPNdB at 35 000 kg, after which the limit remains constant.

Note.— See Attachment A for equations for the calculation of noise levels as a function of take-off mass.

3.5 Trade-offs

If the maximum noise levels are exceeded at one or two measurement points:

- a) the sum of excesses shall not be greater than 3 EPNdB;
- b) any excess at any single point shall not be greater than 2 EPNdB; and

- c) any excesses shall be offset by corresponding reductions at the other point or points.

3.6 Noise certification reference procedures

3.6.1 General conditions

3.6.1.1 The reference procedures shall comply with the appropriate airworthiness requirements.

3.6.1.2 The calculations of reference procedures and flight paths shall be approved by the certificating authority.

3.6.1.3 Except in conditions specified in 3.6.1.4, the take-off and approach reference procedures shall be those defined in 3.6.2 and 3.6.3, respectively.

3.6.1.4 When it is shown by the applicant that the design characteristics of the aeroplane would prevent flight being conducted in accordance with 3.6.2 and 3.6.3, the reference procedures shall:

- a) depart from the reference procedures defined in 3.6.2 and 3.6.3 only to the extent demanded by those design characteristics which make compliance with the procedures impossible; and
- b) be approved by the certificating authority.

3.6.1.5 The reference procedures shall be calculated under the following reference atmospheric conditions:

- a) sea level atmospheric pressure of 1 013.25 hPa;
- b) ambient air temperature of 25°C, i.e. ISA + 10°C;
- c) relative humidity of 70 per cent;
- d) zero wind; and
- e) for the purpose of defining the reference take-off profiles for both take-off and lateral noise measurements, the runway gradient is zero.

Note.— The reference atmosphere in terms of temperature and relative humidity is homogeneous when used for the calculation of atmospheric absorption coefficients.

3.6.2 Take-off reference procedure

Take-off reference flight path shall be calculated as follows:

- a) average engine take-off thrust or power shall be used from the start of take-off to the point where at least the following height above runway level is reached:
 - 1) aeroplanes with two engines or less — 300 m (984 ft);
 - 2) aeroplanes with three engines — 260 m (853 ft);
 - 3) aeroplanes with four engines or more — 210 m (689 ft);

- b) upon reaching the height specified in a) above, the thrust or power shall not be reduced below that required to maintain:
- 1) a climb gradient of 4 per cent; or
 - 2) in the case of multi-engined aeroplanes, level flight with one engine inoperative;
- whichever thrust or power is greater;
- c) for the purpose of determining the lateral full-power noise level, the reference flight path shall be calculated on the basis of using full take-off power throughout without a thrust or power reduction;
- d) the speed shall be the all-engines operating take-off climb speed selected by the applicant for use in normal operation, which shall be at least $V_2 + 19$ km/h ($V_2 + 10$ kt) but not greater than $V_2 + 37$ km/h ($V_2 + 20$ kt) and which shall be attained as soon as practicable after lift-off and be maintained throughout the take-off noise certification test. The increment applied to V_2 shall be the same for all reference masses of an aeroplane model unless a difference in increment is substantiated based on performance characteristics of the aeroplane;
- e) a constant take-off configuration selected by the applicant shall be maintained throughout the take-off reference procedure except that the landing gear may be retracted. Configuration shall be interpreted as meaning the conditions of the systems and centre of gravity position and shall include the position of lift augmentation devices used, whether the APU is operating, and whether air bleeds and power off-takes are operating;
- f) the mass of the aeroplane at the brake release shall be the maximum take-off mass at which the noise certification is requested; and
- g) the average engine shall be defined by the average of all the certification compliant engines used during the aeroplane flight tests up to and during certification when operated to the limitations and procedures given in the flight manual. This will establish a technical standard including the relationship of thrust/power to control parameters (e.g. N_1 or EPR). Noise measurements made during certification tests shall be corrected to this standard.

Note.— Take-off thrust/power used shall be the maximum available for normal operations as scheduled in the performance section of the aeroplane flight manual for the reference atmospheric conditions given in 3.6.1.5.

3.6.3 Approach reference procedure

The approach reference flight path shall be calculated as follows:

- a) the aeroplane shall be stabilized and following a 3° glide path;
- b) a steady approach speed of $V_{REF} + 19$ km/h ($V_{REF} + 10$ kt), with thrust or power stabilized, shall be maintained over the measurement point;

Note.— In airworthiness terms V_{REF} is defined as the “reference landing speed”. Under this definition reference landing speed means “the speed of the aeroplane, in a specified landing configuration, at the point where it descends through the landing screen height in the determination of the landing distance for manual landings”.

- c) the constant approach configuration as used in the airworthiness certification tests, but with the landing gear down, shall be maintained throughout the approach reference procedure;
- d) the mass of the aeroplane at the touchdown shall be the maximum landing mass permitted in the approach configuration defined in 3.6.3 c) at which noise certification is requested; and

- e) the most critical (that which produces the highest noise level) configuration with normal deployment of aerodynamic control surfaces including lift and drag producing devices, at the mass at which certification is requested shall be used. This configuration includes all those items listed in 5.2.5 of Appendix 2 that will contribute to the noisiest continuous state at the maximum landing mass in normal operation.

3.7 Test procedures

3.7.1 The test procedures shall be acceptable to the airworthiness and noise certifying authority of the State issuing the certificate.

3.7.2 The test procedures and noise measurements shall be conducted and processed in an approved manner to yield the noise evaluation measure designated as effective perceived noise level, EPNL, in units of EPNdB, as described in Appendix 2.

3.7.3 Acoustic data shall be adjusted by the methods outlined in Appendix 2 to the reference conditions specified in this chapter. Adjustments for speed and thrust shall be made as described in Section 9 of Appendix 2.

3.7.4 If the mass during the test is different from the mass at which the noise certification is requested, the necessary EPNL adjustment shall not exceed 2 EPNdB for take-offs and 1 EPNdB for approaches. Data approved by the certifying authority shall be used to determine the variation of EPNL with mass for both take-off and approach test conditions. Similarly the necessary EPNL adjustment for variations in approach flight path from the reference flight path shall not exceed 2 EPNdB.

3.7.5 For the approach conditions the test procedures shall be accepted if the aeroplane follows a steady glide path angle of $3^\circ \pm 0.5^\circ$.

3.7.6 If equivalent test procedures different from the reference procedures are used, the test procedures and all methods for adjusting the results to the reference procedures shall be approved by the certifying authority. The amounts of the adjustments shall not exceed 16 EPNdB on take-off and 8 EPNdB on approach, and if the adjustments are more than 8 EPNdB and 4 EPNdB, respectively, the resulting numbers shall be more than 2 EPNdB below the noise limits specified in 3.4.

Note.— Guidance material on the use of equivalent procedures is provided in the Environmental Technical Manual on the Use of Procedures in the Noise Certification of Aircraft (Doc 9501).

3.7.7 For take-off, lateral, and approach conditions, the variation in instantaneous indicated airspeed of the aeroplane must be maintained within ± 3 per cent of the average airspeed between the 10 dB-down points. This shall be determined by reference to the pilot's airspeed indicator. However, when the instantaneous indicated airspeed varies from the average airspeed over the 10 dB-down points by more than ± 5.5 km/h (± 3 kt), and this is judged by the certifying authority representative on the flight deck to be due to atmospheric turbulence, then the flight so affected shall be rejected for noise certification purposes.

CHAPTER 4.

- 1.— **SUBSONIC JET AEROPLANES — Application for Type Certificate submitted on or after 1 January 2006**
- 2.— **PROPELLER-DRIVEN AEROPLANES OVER 8 618 kg — Application for Type Certificate submitted on or after 1 January 2006**

4.1 Applicability

Note. — See also Chapter 1, 1.10 and 1.11.

4.1.1 The Standards of this chapter shall be applicable to:

- a) all subsonic jet aeroplanes, including their derived versions, other than aeroplanes which require a runway¹ length of 610 m or less at maximum certificated mass for airworthiness, in respect of which either the application for a Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, on or after 1 January 2006;
- b) all propeller-driven aeroplanes, including their derived versions, of over 8 618 kg maximum certificated take-off mass, for which either the application for a Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, on or after 1 January 2006; and
- c) all subsonic jet aeroplanes and all propeller-driven aeroplanes certificated originally as satisfying Annex 16, Volume 1, Chapter 3 or Chapter 5, for which recertification to Chapter 4 is requested.

Note. — Guidance material on applications for recertification is provided in the Environmental Technical Manual on the Use of Procedures in the Noise Certification of Aircraft (Doc 9501).

4.1.2 Notwithstanding 4.1.1, it may be recognized by a Contracting State that the following situations for jet aeroplanes and propeller-driven heavy aeroplanes on its registry do not require demonstration of compliance with the provisions of the Standards of Annex 16, Volume I:

- a) gear down flight with one or more retractable landing gear down during the entire flight;
- b) spare engine and nacelle carriage external to the skin of the aeroplane (and return of the pylon or other external mount); and
- c) time-limited engine and/or nacelle changes, where the change in type design specifies that the aeroplane may not be operated for a period of more than 90 days unless compliance with the provisions of Annex 16, Volume I, is shown for that change in type design. This applies only to changes resulting from a required maintenance action.

1. With no stopway or clearway.

4.2 Noise measurements

4.2.1 Noise evaluation measure

The noise evaluation measure shall be the effective perceived noise level in EPNdB as described in Appendix 2.

4.3 Reference noise measurement points

4.3.1 An aeroplane, when tested in accordance with these Standards, shall not exceed the maximum noise level specified in 4.4 of the noise measured at the points specified in Chapter 3, 3.3.1 a), b) and c).

4.3.2 Test noise measurement points

The provisions of Chapter 3, 3.3.2, relating to test noise measurement points shall apply.

4.4 Maximum noise levels

4.4.1 The maximum permitted noise levels are defined in Chapter 3, 3.4.1.1, 3.4.1.2 and 3.4.1.3, and shall not be exceeded at any of the measurement points.

4.4.1.1 The sum of the differences at all three measurement points between the maximum noise levels and the maximum permitted noise levels specified in Chapter 3, 3.4.1.1, 3.4.1.2 and 3.4.1.3, shall not be less than 10 EPNdB.

4.4.1.2 The sum of the differences at any two measurement points between the maximum noise levels and the corresponding maximum permitted noise levels specified in Chapter 3, 3.4.1.1, 3.4.1.2 and 3.4.1.3, shall not be less than 2 EPNdB.

4.5 Noise certification reference procedures

The noise certification reference procedures shall be as specified in Chapter 3, 3.6.

4.6 Test procedures

The test procedures shall be as specified in Chapter 3, 3.7.

4.7 Recertification

For aeroplanes specified in 4.1.1 c), recertification shall be granted on the basis that the evidence used to determine compliance with Chapter 4 is as satisfactory as the evidence associated with aeroplanes specified in 4.1.1 a) and b).

CHAPTER 5. PROPELLER-DRIVEN AEROPLANES OVER 5 700 kg — APPLICATION FOR TYPE CERTIFICATE SUBMITTED BEFORE 1 JANUARY 1985

5.1 Applicability

Note 1.— See also Chapter 1, 1.10 and 1.11.

Note 2.— See Attachment E for guidance on interpretation of these applicability provisions.

5.1.1 The Standards defined hereunder are not applicable to:

- a) aeroplanes requiring a runway¹ length of 610 m or less at maximum certificated mass for airworthiness;
- b) aeroplanes specifically designed for fire fighting;
- c) aeroplanes specifically designed for agricultural purposes;
- d) aeroplanes to which the Standards of Chapter 6 apply; and
- e) aeroplanes to which the Standards of Chapter 10 apply.

5.1.2 The Standards of this chapter shall be applicable to all propeller-driven aeroplanes, including their derived versions, of over 5 700 kg maximum certificated take-off mass for which either the application for a Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, on or after 6 October 1977 and before 1 January 1985.

5.1.3 The Standards of Chapter 2, with the exception of Sections 2.1 and 2.4.2, shall be applicable to derived versions and individual aeroplanes of over 5 700 kg maximum certificated take-off mass and to which Standards of Chapter 6 do not apply and are of the type for which the application for a Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, before 6 October 1977, and for which a certificate of airworthiness for the individual aeroplane was issued on or after 26 November 1981.

5.1.4 The Standards of Chapter 3, with the exception of Section 3.1, shall be applicable to all propeller-driven aeroplanes, including their derived versions, of over 5 700 kg maximum take-off mass, for which either the application for a Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, on or after 1 January 1985.

Note.— The Standards in Chapters 2 and 3 although developed previously for subsonic jet aeroplanes are considered suitable for application to other aeroplane types regardless of the type of power installed.

5.1.5 Notwithstanding 5.1.2 to 5.1.4, it may be recognized by a Contracting State that the following situations for jet aeroplanes and propeller-driven heavy aeroplanes on its registry do not require demonstration of compliance with the provisions of the Standards of Annex 16, Volume I:

1. With no stopway or clearway.

- a) gear down flight with one or more retractable landing gear down during the entire flight;
- b) spare engine and nacelle carriage external to the skin of the aeroplane (and return of the pylon or other external mount); and
- c) time-limited engine and/or nacelle changes, where the change in type design specifies that the aeroplane may not be operated for a period of more than 90 days unless compliance with the provisions of Annex 16, Volume I, is shown for that change in type design. This applies only to changes resulting from a required maintenance action.

5.2 Noise measurements

5.2.1 Noise evaluation measure

The noise evaluation measure shall be the effective perceived noise level in EPNdB as described in Appendix 2.

5.3 Noise measurement points

5.3.1 Reference noise measurement points

An aeroplane, when tested in accordance with these Standards, shall not exceed the noise levels specified in 5.4 at the following points:

- a) *lateral reference noise measurement point*: the point on a line parallel to and 450 m from the runway centre line, or extended runway centre line, where the noise level is a maximum during take-off;
- b) *flyover reference noise measurement point*: the point on the extended centre line of the runway and at a distance of 6.5 km from the start of roll; and
- c) *approach reference noise measurement point*: the point on the ground, on the extended centre line of the runway, 2 000 m from the threshold. On level ground this corresponds to a position 120 m (394 ft) vertically below the 3° descent path originating from a point 300 m beyond the threshold.

5.3.2 Test noise measurement points

5.3.2.1 If the test noise measurement points are not located at the reference noise measurement points, any corrections for the difference in position shall be made in the same manner as the corrections for the differences between test and reference flight paths.

5.3.2.2 Sufficient lateral test noise measurement points shall be used to demonstrate to the certificating authority that the maximum noise level on the appropriate lateral line has been clearly determined. Simultaneous measurements shall be made at one test noise measurement point at a symmetrical position on the other side of the runway.

5.3.2.3 The applicant shall demonstrate to the certificating authority that during flight test, lateral and flyover noise levels were not separately optimized at the expense of each other.

5.4 Maximum noise levels

The maximum noise levels, when determined in accordance with the noise evaluation method of Appendix 2, shall not exceed the following:

- a) *at lateral reference noise measurement point*: 96 EPNdB constant limit for aeroplanes with maximum take-off mass, at which the noise certification is requested, up to 34 000 kg and increasing linearly with the logarithm of aeroplane mass at the rate of 2 EPNdB per doubling of mass from that point until the limit of 103 EPNdB is reached, after which the limit is constant;
- b) *at flyover reference noise measurement point*: 89 EPNdB constant limit for aeroplanes with maximum take-off mass, at which the noise certification is requested, up to 34 000 kg and increasing linearly with the logarithm of aeroplane mass at the rate of 5 EPNdB per doubling of mass from that point until the limit of 106 EPNdB is reached, after which the limit is constant; and
- c) *at approach reference noise measurement point*: 98 EPNdB constant limit for aeroplanes with maximum take-off mass, at which the noise certification is requested, up to 34 000 kg and increasing linearly with the logarithm of aeroplane mass at the rate of 2 EPNdB per doubling of mass from that point until the limit of 105 EPNdB is reached, after which the limit is constant.

Note.— See Attachment A for equations for the calculation of noise levels as a function of take-off mass.

5.5 Trade-offs

If the maximum noise levels are exceeded at one or two measurement points:

- a) the sum of excesses shall not be greater than 3 EPNdB;
- b) any excess at any single point shall not be greater than 2 EPNdB; and
- c) any excesses shall be offset by corresponding reductions at the other point or points.

5.6 Noise certification reference procedures

5.6.1 General conditions

5.6.1.1 The reference procedures shall comply with the appropriate airworthiness requirements.

5.6.1.2 The calculations of reference procedures and flight paths shall be approved by the certifying authority.

5.6.1.3 Except in conditions specified in 5.6.1.4, the take-off and approach reference procedures shall be those defined in 5.6.2 and 5.6.3, respectively.

5.6.1.4 When it is shown by the applicant that the design characteristics of the aeroplane would prevent flight being conducted in accordance with 5.6.2 and 5.6.3, the reference procedures shall:

- a) depart from the reference procedures defined in 5.6.2 and 5.6.3 only to the extent demanded by those design characteristics which make compliance with the procedures impossible; and

- b) be approved by the certifying authority.

5.6.1.5 The reference procedures shall be calculated under the following reference atmospheric conditions:

- a) sea level atmospheric pressure of 1 013.25 hPa;
- b) ambient air temperature of 25°C, i.e. ISA + 10°C except that at the discretion of the certifying authority, an alternative reference ambient air temperature of 15°C, i.e. ISA may be used;
- c) relative humidity of 70 per cent; and
- d) zero wind.

5.6.2 Take-off reference procedure

The take-off flight path shall be calculated as follows:

- a) average take-off power shall be used from the start of take-off to the point where at least the height above runway level shown below is reached. The take-off power used shall be the maximum available for normal operations as scheduled in the performance section of the aeroplane flight manual for the reference atmospheric conditions given in 5.6.1.5.
 - 1) aeroplanes with two engines or less — 300 m (984 ft);
 - 2) aeroplanes with three engines — 260 m (853 ft);
 - 3) aeroplanes with four engines or more — 210 m (689 ft);
- b) upon reaching the height specified in a) above, the power shall not be reduced below that required to maintain:
 - 1) a climb gradient of 4 per cent; or
 - 2) in the case of multi-engined aeroplanes, level flight with one engine inoperative;whichever power is the greater;
- c) the speed shall be the all-engines operating take-off climb speed selected by the applicant for use in normal operation, which shall be at least $V_2 + 19$ km/h ($V_2 + 10$ kt) and which shall be attained as soon as practicable after lift-off and be maintained throughout the take-off noise certification test;
- d) a constant take-off configuration selected by the applicant shall be maintained throughout the take-off reference procedure except that the landing gear may be retracted; and
- e) the mass of the aeroplane at the brake release shall be the maximum take-off mass at which the noise certification is requested.

5.6.3 Approach reference procedure

The approach reference flight path shall be calculated as follows:

- a) the aeroplane shall be stabilized and following a 3° glide path;

- b) the approach shall be made at a stabilized airspeed of not less than $1.3 V_S + 19$ km/h ($1.3 V_S + 10$ kt) with power stabilized during approach and over the measuring point and continued to a normal touchdown;
- c) the constant approach configuration used in the airworthiness certification test, but with the landing gear down, shall be maintained throughout the approach reference procedure;
- d) the mass of the aeroplane at the touchdown shall be the maximum landing mass permitted in the approach configuration defined in 5.6.3 c) at which noise certification is requested; and
- e) the most critical (that which produces the highest noise levels) configuration at the mass at which certification is requested, shall be used.

5.7 Test procedures

5.7.1 The test procedures shall be acceptable to the airworthiness and noise certifying authority of the State issuing the certificate.

5.7.2 The test procedures and noise measurements shall be conducted and processed in an approved manner to yield the noise evaluation measure designated as effective perceived noise level, EPNL, in units of EPNdB, as described in Appendix 2.


5.7.3 Acoustic data shall be adjusted by the methods outlined in Appendix 2 to the reference conditions specified in this chapter. Adjustments for speed and thrust shall be made as described in Section 9 of Appendix 2.

5.7.4 If the mass during the test is different from the mass at which the noise certification is requested, the necessary EPNL adjustment shall not exceed 2 EPNdB for take-offs and 1 EPNdB for approaches. Data approved by the certifying authority shall be used to determine the variation of EPNL with mass for both take-off and approach test conditions. Similarly, the necessary EPNL adjustment for variations in approach flight path from the reference flight path shall not exceed 2 EPNdB.

5.7.5 For the approach conditions the test procedures shall be accepted if the aeroplane follows a steady glide path angle of $3^\circ \pm 0.5^\circ$.

5.7.6 If equivalent test procedures different from the reference procedures are used, the test procedures and all methods for adjusting the results to the reference procedures shall be approved by the certifying authority. The amounts of the adjustments shall not exceed 16 EPNdB on take-off and 8 EPNdB on approach, and if the adjustments are more than 8 EPNdB and 4 EPNdB, respectively, the resulting numbers shall not be within 2 EPNdB of the limit noise levels specified in 5.4.

Note.— Guidance material on the use of equivalent procedures is provided in the Environmental Technical Manual on the Use of Procedures in the Noise Certification of Aircraft (Doc 9501).



CHAPTER 6. PROPELLER-DRIVEN AEROPLANES NOT EXCEEDING 8 618 kg — APPLICATION FOR TYPE CERTIFICATE SUBMITTED BEFORE 17 NOVEMBER 1988

6.1 Applicability

Note 1.— See also Chapter 1, 1.10 and 1.11.

Note 2.— See Attachment E for guidance on interpretation of these applicability provisions.

The Standards of this chapter shall be applicable to all propeller-driven aeroplanes, except those aeroplanes specifically designed for aerobatic purposes or agricultural or fire fighting uses, of a maximum certificated take-off mass not exceeding 8 618 kg for which:

- a) the application for the Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certificating authority, on or after 1 January 1975 and before 17 November 1988, except for derived versions for which an application for a Type Certificate was submitted, or another equivalent procedure was carried out by the certificating authority, on or after 17 November 1988, in which case the Standards of Chapter 10 apply; or
- b) a certificate of airworthiness for the individual aeroplane was first issued on or after 1 January 1980.

6.2 Noise evaluation measure

The noise evaluation measure shall be a weighted overall sound pressure level as defined in International Electrotechnical Commission (IEC) Publication No. 179.¹ The weighting applied to each sinusoidal component of the sound pressure shall be given as a function of frequency by the standard reference curve called “A”.

6.3 Maximum noise levels

For aeroplanes specified in 6.1 a) and b), the maximum noise levels, when determined in accordance with the noise evaluation method of Appendix 3, shall not exceed the following:

- a 68 dB(A) constant limit up to an aeroplane mass of 600 kg, varying linearly with mass from that point to 1 500 kg, after which the limit is constant at 80 dB(A) up to 8 618 kg.

Note.— Where an aeroplane comes within the provisions of Chapter 10, 10.1.2, the limit of 80 dB(A) applies up to 8 618 kg.

1. As amended. Available from the Central Office of the International Electrotechnical Commission, 3 rue de Varembe, Geneva, Switzerland.

6.4 Noise certification reference procedures

The reference procedure shall be calculated under the following reference atmospheric conditions:

- a) sea level atmospheric pressure of 1 013.25 hPa;
- b) ambient air temperature of 25°C, i.e. ISA + 10°C.

6.5 Test procedures

6.5.1 Either the test procedures described in 6.5.2 and 6.5.3 or equivalent test procedures approved by the certifying authority shall be used.

6.5.2 Tests to demonstrate compliance with the maximum noise levels of 6.3 shall consist of a series of level flights overhead the measuring station at a height of

$$300 \begin{matrix} +10 \\ -30 \end{matrix} \text{ m (985 } \begin{matrix} +30 \\ -100 \end{matrix} \text{ ft)}$$

The aeroplane shall pass over the measuring point within $\pm 10^\circ$ from the vertical.


6.5.3 Overflight shall be performed at the highest power in the normal operating range,² stabilized airspeed and with the aeroplane in the cruise configuration.

Note.— *Guidance material on the use of equivalent procedures is provided in the Environmental Technical Manual on the Use of Procedures in the Noise Certification of Aircraft (Doc 9501).*

2. This is normally indicated in the aeroplane flight manual and on the flight instruments.

CHAPTER 7. PROPELLER-DRIVEN STOL AEROPLANES

Note.— Standards and Recommended Practices for this chapter are not yet developed. In the meantime, guidelines provided in Attachment B may be used for noise certification of propeller-driven STOL aeroplanes for which a certificate of airworthiness for the individual aeroplane was first issued on or after 1 January 1976.



CHAPTER 8. HELICOPTERS

8.1 Applicability

Note.— See also Chapter 1, 1.10 and 1.11.

8.1.1 The Standards of this chapter shall be applicable to all helicopters for which 8.1.2, 8.1.3, and 8.1.4 apply, except those designed exclusively for agricultural, fire fighting or external load carrying purposes.

8.1.2 For a helicopter for which the application for the Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, on or after 1 January 1985, except for those helicopters specified in 8.1.4, the noise levels of 8.4.1 shall apply.

8.1.3 For a derived version of a helicopter for which the application for a change of type design was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, on or after 17 November 1988, except for those helicopters specified in 8.1.4, the noise levels of 8.4.1 shall apply.

8.1.4 For all helicopters, including their derived versions, for which the application for the Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, on or after 21 March 2002, the noise levels of 8.4.2 shall apply.

8.1.5 Certification of helicopters which are capable of carrying external loads or external equipment shall be made without such loads or equipment fitted.

Note.— Helicopters which comply with the Standards with internal loads may be excepted when carrying external loads or external equipment, if such operations are conducted at a gross mass or with other operating parameters which are in excess of those certificated for airworthiness with internal loads.

8.1.6 An applicant under 8.1.1 may alternatively elect to show compliance with Chapter 11 instead of Chapter 8 if the helicopter has a maximum certificated take-off mass of 3 175 kg or less.

8.2 Noise evaluation measure

The noise evaluation measure shall be the effective perceived noise level in EPNdB as described in Appendix 2.

8.3 Reference noise measurement points

A helicopter, when tested in accordance with these Standards, shall not exceed the noise levels specified in 8.4 at the following points:

a) *Take-off reference noise measurement points*

- 1) a flight path reference point located on the ground vertically below the flight path defined in the take-off reference procedure and 500 m horizontally in the direction of flight from the point at which transition to climbing flight is initiated in the reference procedure (see 8.6.2);

- 2) two other points on the ground symmetrically disposed at 150 m on both sides of the flight path defined in the take-off reference procedure and lying on a line through the flight path reference point.
- b) *Overflight reference noise measurement points*
- 1) a flight path reference point located on the ground 150 m (492 ft) vertically below the flight path defined in the overflight reference procedure (see 8.6.3.1);
 - 2) two other points on the ground symmetrically disposed at 150 m on both sides of the flight path defined in the overflight reference procedure and lying on a line through the flight path reference point.
- c) *Approach reference noise measurement points*
- 1) a flight path reference point located on the ground 120 m (394 ft) vertically below the flight path defined in the approach reference procedure (see 8.6.4). On level ground, this corresponds to a position 1 140 m from the intersection of the 6.0° approach path with the ground plane;
 - 2) two other points on the ground symmetrically disposed at 150 m on both sides of the flight path defined in the approach reference procedure and lying on a line through the flight path reference point.

Note.— See Attachment H (Guidelines for Obtaining Helicopter Noise Data for Land-use Planning Purposes) that defines acceptable supplemental land-use planning (LUP) data procedures.

8.4 Maximum noise levels

8.4.1 For helicopters specified in 8.1.2 and 8.1.3, the maximum noise levels, when determined in accordance with the noise evaluation method of Appendix 2, shall not exceed the following:

8.4.1.1 *For take-off:* 109 EPNdB for helicopters with maximum certificated take-off mass, at which the noise certification is requested, of 80 000 kg and over and decreasing linearly with the logarithm of the helicopter mass at a rate of 3 EPNdB per halving of mass down to 89 EPNdB after which the limit is constant.

8.4.1.2 *For overflight:* 108 EPNdB for helicopters with maximum certificated take-off mass, at which the noise certification is requested, of 80 000 kg and over and decreasing linearly with the logarithm of the helicopter mass at a rate of 3 EPNdB per halving of mass down to 88 EPNdB after which the limit is constant.

8.4.1.3 *For approach:* 110 EPNdB for helicopters with maximum certificated take-off mass, at which the noise certification is requested, of 80 000 kg and over and decreasing linearly with the logarithm of the helicopter mass at a rate of 3 EPNdB per halving of mass down to 90 EPNdB after which the limit is constant.

Note.— See Attachment A for equations for the calculation of noise levels as a function of take-off mass.

8.4.2 For helicopters specified in 8.1.4, the maximum noise levels, when determined in accordance with the noise evaluation method of Appendix 2, shall not exceed the following:

8.4.2.1 *For take-off:* 106 EPNdB for helicopters with maximum certificated take-off mass, at which the noise certification is requested, of 80 000 kg and over and decreasing linearly with the logarithm of the helicopter mass at a rate of 3 EPNdB per halving of mass down to 86 EPNdB after which the limit is constant.

8.4.2.2 *For overflight:* 104 EPNdB for helicopters with maximum certificated take-off mass, at which the noise certification is requested, of 80 000 kg and over and decreasing linearly with the logarithm of the helicopter mass at a rate of 3 EPNdB per halving of mass down to 84 EPNdB after which the limit is constant.

8.4.2.3 *For approach:* 109 EPNdB for helicopters with maximum certificated take-off mass, at which the noise certification is requested, of 80 000 kg and over and decreasing linearly with the logarithm of the helicopter mass at a rate of 3 EPNdB per halving of mass down to 89 EPNdB after which the limit is constant.

8.5 Trade-offs

If the noise level limits are exceeded at one or two measurement points:

- a) the sum of excesses shall not be greater than 4 EPNdB;
- b) any excess at any single point shall not be greater than 3 EPNdB; and
- c) any excess shall be offset by corresponding reductions at the other point or points.

8.6 Noise certification reference procedures

8.6.1 General conditions

8.6.1.1 The reference procedures shall comply with the appropriate airworthiness requirements.

8.6.1.2 The reference procedures and flight paths shall be approved by the certifying authority.

8.6.1.3 Except in conditions specified in 8.6.1.4, the take-off, overflight and approach reference procedures shall be those defined in 8.6.2, 8.6.3 and 8.6.4, respectively.

8.6.1.4 When it is shown by the applicant that the design characteristics of the helicopter would prevent flight being conducted in accordance with 8.6.2, 8.6.3 or 8.6.4, the reference procedures shall:

- a) depart from the reference procedures defined in 8.6.2, 8.6.3 or 8.6.4 only to the extent demanded by those design characteristics which make compliance with the reference procedures impossible; and
- b) be approved by the certifying authority.

8.6.1.5 The reference procedures shall be established for the following reference atmospheric conditions:

- a) sea level atmospheric pressure of 1 013.25 hPa;
- b) ambient air temperature of 25°C, i.e. ISA + 10°C;
- c) relative humidity of 70 per cent; and
- d) zero wind.

8.6.1.6 In 8.6.2 c), 8.6.3.1 c) and 8.6.4 c), the maximum normal operating rpm shall be taken as the highest rotor speed for each reference procedure corresponding to the airworthiness limit imposed by the manufacturer and approved by the certifying authority. Where a tolerance on the highest rotor speed is specified, the maximum normal operating rotor speed shall be taken as the highest rotor speed about which that tolerance is given. If the rotor speed is automatically linked with flight condition, the maximum normal operating rotor speed corresponding with the reference flight condition shall be used during

the noise certification procedure. If rotor speed can be changed by pilot action, the maximum normal operating rotor speed specified in the flight manual limitation section for the reference conditions shall be used during the noise certification procedure.

8.6.2 Take-off reference procedure

The take-off reference flight procedure shall be established as follows:

- a) the helicopter shall be stabilized at the maximum take-off power corresponding to minimum installed engine(s) specification power available for the reference ambient conditions or gearbox torque limit, whichever is lower, and along a path starting from a point located 500 m prior to the flight path reference point, at 20 m (65 ft) above the ground;
- b) the best rate of climb speed, V_y , or the lowest approved speed for the climb after take-off, whichever is the greater, shall be maintained throughout the take-off reference procedure;
- c) the steady climb shall be made with the rotor speed stabilized at the maximum normal operating rpm certificated for take-off;
- d) a constant take-off configuration selected by the applicant shall be maintained throughout the take-off reference procedure with the landing gear position consistent with the airworthiness certification tests for establishing the best rate of climb speed, V_y ;
- e) the mass of the helicopter shall be the maximum take-off mass at which noise certification is requested; and
- f) the reference take-off path is defined as a straight line segment inclined from the starting point (500 m prior to the centre microphone location and 20 m (65 ft) above ground level) at an angle defined by best rate of climb (BRC) and V_y for minimum specification engine performance.

8.6.3 Overflight reference procedure

8.6.3.1 The overflight reference procedure shall be established as follows:

- a) the helicopter shall be stabilized in level flight overhead the flight path reference point at a height of 150 m (492 ft);
- b) a speed of $0.9 V_H$ or $0.9 V_{NE}$ or $0.45 V_H + 120 \text{ km/h}$ ($0.45 V_H + 65 \text{ kt}$) or $0.45 V_{NE} + 120 \text{ km/h}$ ($0.45 V_{NE} + 65 \text{ kt}$), whichever is the least, shall be maintained throughout the overflight reference procedure;

Note.— For noise certification purposes, V_H is defined as the airspeed in level flight obtained using the torque corresponding to minimum engine installed, maximum continuous power available for sea level pressure (1 013.25 hPa), 25°C ambient conditions at the relevant maximum certificated mass. V_{NE} is defined as the not-to-exceed airworthiness airspeed imposed by the manufacturer and approved by the certifying authority.

- c) the overflight shall be made with the rotor speed stabilized at the maximum normal operating rpm certificated for level flight;
- d) the helicopter shall be in the cruise configuration; and
- e) the mass of the helicopter shall be the maximum take-off mass at which noise certification is requested.

8.6.3.2 The value of V_H and/or V_{NE} used for noise certification shall be quoted in the approved flight manual.

8.6.4 Approach reference procedure

The approach reference procedure shall be established as follows:

- a) the helicopter shall be stabilized and following a 6.0° approach path;
- b) the approach shall be made at a stabilized airspeed equal to the best rate of climb speed, V_y , or the lowest approved speed for the approach, whichever is the greater, with power stabilized during the approach and over the flight path reference point, and continued to a normal touchdown;
- c) the approach shall be made with the rotor speed stabilized at the maximum normal operating rpm certificated for approach;
- d) the constant approach configuration used in airworthiness certification tests, with the landing gear extended, shall be maintained throughout the approach reference procedure; and
- e) the mass of the helicopter at touchdown shall be the maximum landing mass at which noise certification is requested.

8.7 Test procedures

8.7.1 The test procedures shall be acceptable to the airworthiness and noise certificating authority of the State issuing the certificate.

8.7.2 The test procedures and noise measurements shall be conducted and processed in an approved manner to yield the noise evaluation measure designated as effective perceived noise level, EPNL, in units of EPNdB, as described in Appendix 2.

8.7.3 Test conditions and procedures shall be closely similar to reference conditions and procedures or the acoustic data shall be adjusted, by the methods outlined in Appendix 2, to the reference conditions and procedures specified in this chapter.

8.7.4 Adjustments for differences between test and reference flight procedures shall not exceed:

- a) *for take-off*: 4.0 EPNdB, of which the arithmetic sum of Δ_1 and the term $-7.5 \log(QK/Q_r K_r)$ from Δ_2 shall not in total exceed 2.0 EPNdB;
- b) *for overflight or approach*: 2.0 EPNdB.

8.7.5 During the test the average rotor rpm shall not vary from the normal maximum operating rpm by more than ± 1.0 per cent during the 10 dB-down time period.

8.7.6 The helicopter airspeed shall not vary from the reference airspeed appropriate to the flight demonstration by more than ± 9 km/h (5 kt) throughout the 10 dB-down time period.

8.7.7 The number of level overflights made with a headwind component shall be equal to the number of level overflights made with a tailwind component.

8.7.8 The helicopter shall fly within $\pm 10^\circ$ or ± 20 m, whichever is greater, from the vertical above the reference track throughout the 10 dB-down time period (see Figure 8-1).

8.7.9 The helicopter height shall not vary during overflight from the reference height at the overhead point by more than ± 9 m (30 ft).

8.7.10 During the approach noise demonstration the helicopter shall be established on a stabilized constant speed approach within the airspace contained between approach angles of 5.5° and 6.5° .

8.7.11 Tests shall be conducted at a helicopter mass not less than 90 per cent of the relevant maximum certificated mass and may be conducted at a mass not exceeding 105 per cent of the relevant maximum certificated mass. For each of the three flight conditions, at least one test must be completed at or above this maximum certificated mass.

Note.— Guidance material on the use of equivalent procedures is provided in the Environmental Technical Manual on the Use of Procedures in the Noise Certification of Aircraft (Doc 9501).


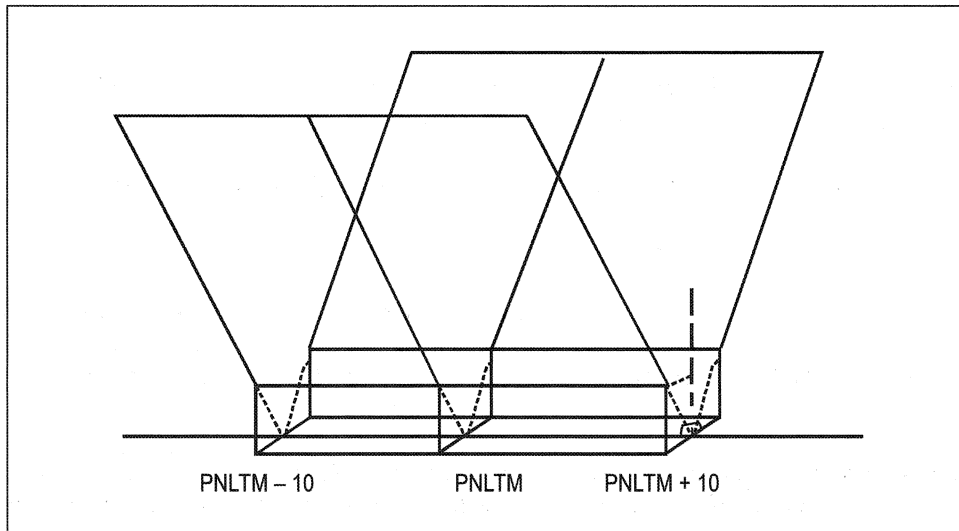


Figure 8-1. Helicopter lateral deviation tolerances

CHAPTER 9. INSTALLED AUXILIARY POWER UNITS (APU) AND ASSOCIATED AIRCRAFT SYSTEMS DURING GROUND OPERATIONS

Note.— Standards and Recommended Practices for this chapter are not yet developed. In the meantime, guidelines provided in Attachment C may be used for noise certification of installed auxiliary power units (APU) and associated aircraft systems in:

- a) *all aircraft for which the application for a Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, on or after 6 October 1977; and*
 - b) *aircraft of existing type design for which the application for a change of type design involving the basic APU installation was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, on or after 6 October 1977.*
-



CHAPTER 10. PROPELLER-DRIVEN AEROPLANES NOT EXCEEDING 8 618 kg — APPLICATION FOR TYPE CERTIFICATE OR DERIVED VERSION SUBMITTED ON OR AFTER 17 NOVEMBER 1988

10.1 Applicability

Note 1.— See also Chapter 1, 1.10 and 1.11.

Note 2.— See Attachment E for guidance on interpretation of these applicability provisions.

10.1.1 The Standards of this chapter shall be applicable to all propeller-driven aeroplanes and their derived versions, with a certificated take-off mass not exceeding 8 618 kg, except those aeroplanes specifically designed for aerobatic purposes and agricultural or fire fighting uses and self-sustaining powered sailplanes.

10.1.2 For an aeroplane for which the application for the Type Certificate or for all derived versions was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, on or after 17 November 1988, except for those aeroplanes specified in 10.1.4, the noise limits of 10.4 a) shall apply.

10.1.3 For aeroplanes specified in 10.1.2 which fail to comply with the Standards of this chapter and where the application for the Type Certificate or all derived versions was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, before 17 November 1993, the Standards of Chapter 6 shall apply.

10.1.4 For single-engined aeroplanes, except those aeroplanes specifically designed for aerobatic purposes and agricultural or fire fighting uses, self-sustaining powered sailplanes, float planes and amphibians, for which:

- a) the application for the Type Certificate or their derived versions was submitted, or another equivalent procedure was carried out by the certifying authority, on or after 4 November 1999, the noise limits of 10.4 b) shall apply;
- b) an application for the Type Certificate for the derived version was submitted, or other procedure was carried out, on or after 4 November 1999, but for which the application for the Type Certificate, or another equivalent procedure was carried out by the certifying authority, before 4 November 1999, the noise limits of 10.4 b) shall apply;
- c) the requirements of b) above apply, but which fail to meet the noise limits of 10.4 b), the noise limits of 10.4 a) shall apply provided that the application for the derived version was made before 4 November 2004.

10.2 Noise evaluation measure

The noise evaluation measure shall be the maximum A-weighted noise level (L_{Amax}) as defined in Appendix 6.

10.3 Reference noise measurement points

10.3.1 An aeroplane, when tested in accordance with these Standards, shall not exceed the noise level specified in 10.4 at the take-off reference noise measurement point.

10.3.2 The take-off reference noise measurement point is the point on the extended centre line of the runway at a distance of 2 500 m from the start of take-off roll.

10.4 Maximum noise levels

The maximum noise levels determined in accordance with the noise evaluation method of Appendix 6 shall not exceed the following:

- a) for aeroplanes specified in 10.1.2 and 10.1.4 c), a 76 dB(A) constant limit up to an aeroplane mass of 600 kg varying linearly from that point with the logarithm of aeroplane mass until at 1 400 kg the limit of 88 dB(A) is reached after which the limit is constant up to 8 618 kg; and
- b) for aeroplanes specified in 10.1.4 a) and b), a 70 dB(A) constant limit up to an aeroplane mass of 570 kg increasing linearly from that point with the logarithm of aeroplane mass until at 1 500 kg the limit of 85 dB(A) is reached after which the limit is constant up to 8 618 kg.

10.5 Noise certification reference procedures

10.5.1 General conditions

10.5.1.1 The calculations of reference procedures and flight paths shall be approved by the certificating authority.

10.5.1.2 Except in conditions specified in 10.5.1.3, the take-off reference procedure shall be that defined in 10.5.2.

10.5.1.3 When it is shown by the applicant that the design characteristics of the aeroplane would prevent flights being conducted in accordance with 10.5.2, the reference procedures shall:

- a) depart from the reference procedures defined only to the extent demanded by those design characteristics which make compliance with the procedures impossible; and
- b) be approved by the certificating authority.

10.5.1.4 The reference procedures shall be calculated under the following atmospheric conditions:

- a) sea level atmospheric pressure of 1 013.25 hPa;
- b) ambient air temperature of 15°C, i.e. ISA;
- c) relative humidity of 70 per cent; and
- d) zero wind.

10.5.1.5 The acoustic reference atmospheric conditions shall be the same as the reference atmospheric conditions for flight.

10.5.2 Take-off reference procedure

The take-off flight path shall be calculated taking into account the following two phases.

First phase

- a) Take-off power shall be used from the brake release point to the point at which the height of 15 m (50 ft) above the runway is reached.
- b) A constant take-off configuration selected by the applicant shall be maintained throughout this first phase.
- c) The mass of the aeroplane at the brake release shall be the maximum take-off mass at which the noise certification is requested.
- d) The length of this first phase shall correspond to the length given in the airworthiness data for a take-off on a level paved runway.

Second phase

- a) The beginning of the second phase corresponds to the end of the first phase.
- b) The aeroplane shall be in the climb configuration with landing gear up, if retractable, and flap setting corresponding to normal climb throughout this second phase.
- c) The speed shall be the best rate of climb speed, V_y .
- d) Take-off power and, for aeroplanes equipped with variable pitch or constant speed propellers, rpm shall be maintained throughout the second phase. If airworthiness limitations do not permit the application of take-off power and rpm up to the reference point, then take-off power and rpm shall be maintained for as long as is permitted by such limitations and thereafter at maximum continuous power and rpm. Limiting of time for which take-off power and rpm shall be used in order to comply with this chapter shall not be permitted. The reference height shall be calculated assuming climb gradients appropriate to each power setting used.

10.6 Test procedures


10.6.1 The test procedures shall be acceptable to the airworthiness and noise certificating authorities of the State issuing the certificate.

10.6.2 The test procedures and noise measurements shall be conducted and processed in an approved manner to yield the noise evaluation measure in units of L_{Amax} as described in Appendix 6.

10.6.3 Acoustic data shall be adjusted by the methods outlined in Appendix 6 to the reference conditions specified in this chapter.

10.6.4 If equivalent test procedures are used, the test procedures and all methods for correcting the results to the reference procedures shall be approved by the certificating authority.

Note.— *Guidance material on the use of equivalent procedures is provided in the Environmental Technical Manual on the Use of Procedures in the Noise Certification of Aircraft (Doc 9501).*



CHAPTER 11. HELICOPTERS NOT EXCEEDING 3 175 kg MAXIMUM CERTIFICATED TAKE-OFF MASS

11.1 Applicability

Note.— See also Chapter 1, 1.10 and 1.11.

11.1.1 The Standards of this chapter shall be applicable to all helicopters having a maximum certificated take-off mass not exceeding 3 175 kg for which 11.1.2, 11.1.3 and 11.1.4 apply, except those designed exclusively for agricultural, fire fighting or external load carrying purposes.

11.1.2 For a helicopter for which the application for the Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, on or after 11 November 1993, except for those helicopters specified in 11.1.4, the noise levels of 11.4.1 shall apply.

11.1.3 For a derived version of a helicopter for which the application for the Type Certificate for a change of type design was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, on or after 11 November 1993, except for those helicopters specified in 11.1.4, the noise levels of 11.4.1 shall apply.

11.1.4 For all helicopters, including their derived versions, for which the application for the Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, on or after 21 March 2002, the noise levels of 11.4.2 shall apply.

11.1.5 Certification of helicopters which are capable of carrying external loads or external equipment shall be made without such loads or equipment fitted.

Note.— Helicopters which comply with the Standards with internal loads may be excepted when carrying external loads or external equipment, if such operations are conducted at a gross mass or with other operating parameters which are in excess of those certificated for airworthiness with internal loads.

11.1.6 An applicant under 11.1.1, 11.1.2, 11.1.3 and 11.1.4 may alternatively elect to show compliance with Chapter 8 instead of complying with this chapter.

11.2 Noise evaluation measure

The noise evaluation measure shall be the sound exposure level (SEL) as described in Appendix 4.

11.3 Reference noise measurement point

A helicopter, when tested in accordance with these Standards, shall not exceed the noise levels specified in 11.4 at a flight path reference point located on the ground 150 m (492 ft) vertically below the flight path defined in the overflight reference procedure (see 11.5.2.1).

Note.— See Attachment H (Guidelines for Obtaining Helicopter Noise Data for Land-use Planning Purposes) that defines acceptable supplemental land-use planning (LUP) data procedures.

11.4 Maximum noise level

11.4.1 For helicopters specified in 11.1.2 and 11.1.3, the maximum noise levels, when determined in accordance with the noise evaluation method of Appendix 4, shall not exceed 82 decibels SEL for helicopters with maximum certificated take-off mass, at which the noise certification is requested, of up to 788 kg and increasing linearly with the logarithm of the helicopter mass at a rate of 3 decibels per doubling of mass thereafter.

11.4.2 For helicopters specified in 11.1.4, the maximum noise levels, when determined in accordance with the noise evaluation method of Appendix 4, shall not exceed 82 decibels SEL for helicopters with maximum certificated take-off mass, at which the noise certification is requested, of up to 1 417 kg and increasing linearly with the logarithm of the helicopter mass at a rate of 3 decibels per doubling of mass thereafter.

11.5 Noise certification reference procedure

11.5.1 General conditions

11.5.1.1 The reference procedure shall comply with the appropriate airworthiness requirements and shall be approved by the certifying authority.

11.5.1.2 Except as otherwise approved, the overflight reference procedure shall be as defined in 11.5.2.

11.5.1.3 When it is shown by the applicant that the design characteristics of the helicopter would prevent flight being conducted in accordance with 11.5.2 the reference procedure shall be permitted to depart from the standard reference procedure, with the approval of the certifying authority, but only to the extent demanded by those design characteristics which make compliance with the reference procedures impossible.

11.5.1.4 The reference procedure shall be established for the following reference atmospheric conditions:

- a) sea level atmospheric pressure of 1 013.25 hPa;
- b) ambient air temperature of 25°C;
- c) relative humidity of 70 per cent; and
- d) zero wind.

11.5.1.5 The maximum normal operating rpm shall be taken as the highest rotor speed corresponding to the airworthiness limit imposed by the manufacturer and approved by the certifying authority for overflight. Where a tolerance on the highest rotor speed is specified, the maximum normal operating rotor speed shall be taken as the highest rotor speed about which that tolerance is given. If rotor speed is automatically linked with flight condition, the maximum normal operating rotor speed corresponding with the reference flight condition shall be used during the noise certification procedure. If rotor speed can be changed by pilot action, the maximum normal operating rotor speed specified in the flight manual limitation section for the reference conditions shall be used during the noise certification procedure.

11.5.2 Reference procedure

11.5.2.1 The reference procedure shall be established as follows:

- a) the helicopter shall be stabilized in level flight overhead the flight path reference point at a height of 150 m (492 ft) \pm 15 m (50 ft);
- b) a speed of $0.9 V_H$ or $0.9 V_{NE}$ or $0.45 V_H + 120$ km/h (65 kt) or $0.45 V_{NE} + 120$ km/h (65 kt), whichever is the least, shall be maintained throughout the overflight procedure. For noise certification purposes, V_H is defined as the airspeed in level flight obtained using the torque corresponding to minimum engine installed, maximum continuous power available for sea level pressure (1 013.25 hPa), 25°C ambient conditions at the relevant maximum certificated mass. V_{NE} is defined as the not-to-exceed airworthiness airspeed imposed by the manufacturer and approved by the certificating authority;
- c) the overflight shall be made with the rotor speed stabilized at the maximum normal operating rpm certificated for level flight;
- d) the helicopter shall be in the cruise configuration; and
- e) the mass of the helicopter shall be the maximum take-off mass at which noise certification is requested.

11.5.2.2 The value of V_H and/or V_{NE} used for noise certification shall be quoted in the approved flight manual.

11.6 Test procedures

11.6.1 The test procedures shall be acceptable to the airworthiness and noise certificating authorities of the State issuing the certificate.

11.6.2 The test procedure and noise measurements shall be conducted and processed in an approved manner to yield the noise evaluation measure designated as sound exposure level (SEL), in A-weighted decibels, as described in Appendix 4.

11.6.3 Test conditions and procedures shall be closely similar to reference conditions and procedures or the acoustic data shall be adjusted, by the methods outlined in Appendix 4, to the reference conditions and procedures specified in this chapter.

11.6.4 During the test, flights shall be made in equal numbers with tailwind and headwind components.

11.6.5 Adjustments for differences between test and reference flight procedures shall not exceed 2.0 dB(A).


11.6.6 During the test, the average rotor rpm shall not vary from the normal maximum operating rpm by more than ± 1.0 per cent during the 10 dB-down time period.

11.6.7 The helicopter airspeed shall not vary from the reference airspeed appropriate to the flight demonstration as described in Appendix 4 by more than ± 5 km/h (± 3 kt) throughout the 10 dB-down time period.

11.6.8 The helicopter shall fly within $\pm 10^\circ$ from the vertical above the reference track through the reference noise measurement position.

11.6.9 Tests shall be conducted at a helicopter mass not less than 90 per cent of the relevant maximum certificated mass and may be conducted at a mass not exceeding 105 per cent of the relevant maximum certificated mass.

Note.— Guidance material on the use of equivalent procedures is provided in the Environmental Technical Manual on the Use of Procedures in the Noise Certification of Aircraft (Doc 9501).



CHAPTER 12. SUPERSONIC AEROPLANES


12.1 Supersonic aeroplanes — application for Type Certificate submitted before 1 January 1975

12.1.1 The Standards of Chapter 2 of this Part, with the exception of maximum noise levels specified in 2.4, shall be applicable to all supersonic aeroplanes, including their derived versions, in respect of which either the application for the Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certificating authority, before 1 January 1975, and for which a certificate of airworthiness for the individual aeroplane was first issued after 26 November 1981.

12.1.2 The maximum noise levels of those aeroplanes covered by 12.1.1, when determined in accordance with the noise evaluation method of Appendix 1, shall not exceed the measured noise levels of the first certificated aeroplane of the type.

12.2 Supersonic aeroplanes — application for Type Certificate submitted on or after 1 January 1975


Note.— Standards and Recommended Practices for these aeroplanes are not yet developed but the noise levels of Chapter 3 of this Part applicable to subsonic jet aeroplanes may be used as guidelines for aeroplanes for which the application for a Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certificating authority, on or after 1 January 1975.



CHAPTER 13. TILT-ROTOR AIRCRAFT

Note 1.— Standards and Recommended Practices for this chapter are not yet developed. In the meantime, guidelines provided in Attachment F may be used for noise certification of tilt-rotor aircraft for which the application for a Type Certificate was submitted, or another equivalent prescribed procedure was carried out by the certifying authority, on or after 13 May 1998 and to provide data for land-use planning purposes.

Note 2.— Development of these guidelines made extensive use of the Chapter 8 noise certification Standards for helicopters, where applicable.




PART III. NOISE MEASUREMENT FOR MONITORING PURPOSES

Note.— The following Recommendation has been developed to assist States that measure noise for monitoring purposes, until such time as agreement on a single method can be reached.

Recommendation.— *Where the measurement of aircraft noise is made for monitoring purposes, the method of Appendix 5 should be used.*

Note.— These purposes are described as including: monitoring compliance with and checking the effectiveness of such noise abatement requirements as may have been established for aircraft in flight or on the ground. An indication of the degree of correlation between values obtained by the method used for measuring noise for aircraft design purposes and the method(s) used for monitoring purposes would be necessary.




PART IV. ASSESSMENT OF AIRPORT NOISE

Note.— The following Recommendations have been developed for the purpose of promoting international communication between States that have adopted a variety of methods of assessing noise for land-use planning purposes.

1. **Recommendation.**— *Where international comparison of noise assessment around airports is undertaken, the methodology described in Recommended Method for Computing Noise Contours around Airports (Cir 205) should be used.*

2. **Recommendation.**— *Contracting States that have not yet adopted, or are considering changing a national noise assessment methodology, should use the methodology described in Recommended Method for Computing Noise Contours around Airports (Cir 205).*



PART V. BALANCED APPROACH TO NOISE MANAGEMENT

Note.— Provisions in Part II of this Annex are aimed at noise certification which characterizes the maximum noise emitted by the aircraft. However, noise abatement procedures approved by national authorities and included in operations manuals allow a reduction of noise during aircraft operations.

1. The balanced approach to noise management consists of identifying the noise problem at an airport and then analysing the various measures available to reduce noise through the exploration of four principal elements, namely reduction at source (addressed in Part II of this Annex), land-use planning and management, noise abatement operational procedures and operating restrictions, with the goal of addressing the noise problem in the most cost-effective manner. All the elements of the balanced approach are addressed in the *Guidance on the Balanced Approach to Aircraft Noise Management* (Doc 9829).

2. Aircraft operating procedures for noise abatement shall not be introduced unless the regulatory authority, based on appropriate studies and consultation, determines that a noise problem exists.

3. **Recommendation.**— *Aircraft operating procedures for noise abatement should be developed in consultation with the operators that use the aerodrome concerned.*


4. **Recommendation.**— *The factors to be taken into consideration in the development of appropriate aircraft operating procedures for noise abatement should include the following:*

- a) *the nature and extent of the noise problem including:*
 - 1) *the location of noise-sensitive areas; and*
 - 2) *critical hours;*
- b) *the types of aircraft affected, including aircraft mass, aerodrome elevation, temperature considerations;*
- c) *the types of procedures likely to be most effective;*
- d) *obstacle clearances (PANS-OPS (Doc 8168), Volumes I and II); and*
- e) *human performance in the application of the operating procedures.*

Note 1.— See Annex 6, Part I, Chapter 4, for aeroplane noise abatement operating procedures.

Note 2.— Guidance material on human performance can be found in the Human Factors Training Manual (Doc 9683).

5. **Recommendation.**— *Although in most countries, land-use planning and management are the responsibility of national and/or local planning authorities rather than aviation authorities, ICAO has developed guidance material which should be used to assist planning authorities in taking appropriate measures to ensure compatible land-use management around airports to the benefit of both the airport and the surrounding communities (Airport Planning Manual, Part 2, (Doc 9184)).*



APPENDIX 1. EVALUATION METHOD FOR NOISE CERTIFICATION OF SUBSONIC JET AEROPLANES — APPLICATION FOR TYPE CERTIFICATE SUBMITTED BEFORE 6 OCTOBER 1977

Note 1.— See Part II, Chapter 2.

Note 2.— The procedures in this appendix also apply to certain aircraft types covered in Chapters 5 and 12.

1. INTRODUCTION

Note 1.— This noise evaluation method includes:

- a) noise certification test and measurement conditions;*
- b) measurement of aeroplane noise received on the ground;*
- c) calculation of effective perceived noise level from measured noise data; and*
- d) reporting of data to the certifying authority and correcting measured data.*

Note 2.— The instructions and procedures given in the method are clearly delineated to ensure uniformity during compliance tests, and to permit comparison between tests of various types of aeroplanes, conducted in various geographical locations. It applies only to aeroplanes within the applicability clauses of Part II, Chapter 2.

Note 3.— A complete list of symbols and units, the mathematical formulation of perceived noisiness, a procedure for determining atmospheric attenuation of sound, and detailed procedures for correcting noise levels from non-reference to reference conditions are included in Sections 6 to 9 of this appendix.

2. NOISE CERTIFICATION TEST AND MEASUREMENT CONDITIONS

2.1 General

This section prescribes the conditions under which noise certification tests shall be conducted and the measurement procedures that shall be used.

Note.— Many applications for a noise certificate involve only minor changes to the aeroplane type design. The resultant changes in noise can often be established reliably without the necessity of resorting to a complete test as outlined in this appendix. For this reason certifying authorities are encouraged to permit the use of appropriate “equivalent procedures”. Also, there are equivalent procedures that may be used in full certification tests, in the interest of reducing costs and providing reliable results. Guidance material on the use of equivalent procedures in the noise certification of subsonic jet aeroplanes is provided in the Environmental Technical Manual on the Use of Procedures in the Noise Certification of Aircraft (Doc 9501).

2.2 General test conditions

2.2.1 Tests to show compliance with established noise certification levels shall consist of a series of take-offs and landings during which measurements shall be taken at the measuring points specified by the certificating authority. These points are typically:

- a) the flyover noise measurement point;¹
- b) the approach noise measurement point; and
- c) the lateral noise measurement point(s).²

which for noise certification purposes are specified in Part II, Chapter 2, 2.3. To ensure that the maximum subjective noise level along the lateral is obtained, a sufficient number of lateral stations shall be used. To establish whether any asymmetry exists in the noise field at least one measuring station shall be located along the alternative lateral. On each test take-off simultaneous measurements shall be made at the lateral measuring points on both sides of the runway and also at the take-off flyover measuring point.

2.2.2 Locations for measuring noise from an aeroplane in flight shall be surrounded by relatively flat terrain having no excessive sound absorption characteristics such as might be caused by thick, matted or tall grass, shrubs or wooded areas. No obstructions which significantly influence the sound field from the aeroplane shall exist within a conical space above the measurement position, the cone being defined by an axis normal to the ground and by a half-angle 75° from this axis. If the height of the ground at any measuring point differs from that of the nearest point on the runway by more than 6 m (20 ft), corrections shall be made.

Note.— Those people carrying out the measurements could themselves constitute such obstructions.

2.2.3 The tests shall be carried out under the following atmospheric conditions:

- a) no precipitation;
- b) relative humidity not higher than 90 per cent or lower than 30 per cent;
- c) ambient temperature not above 30°C and not below 2°C at 10 m (33 ft) above ground;
- d) average wind not above 19 km/h (10 kt) and average crosswind component not above 9 km/h (5 kt) at 10 m (33 ft) above ground. A 30-second averaging period spanning the 10 dB-down time interval is recommended; and
- e) no temperature inversion or anomalous wind conditions that would significantly affect the noise level of the aeroplane when the noise is recorded at the measuring points specified by the certificating authority.

2.3 Aeroplane testing procedures

2.3.1 The test procedures shall be acceptable to the airworthiness and noise certificating authorities of the State issuing the certificate.

2.3.2 The aeroplane testing procedures and noise measurements shall be conducted and processed in an approved manner to yield the noise evaluation measure designated as effective perceived noise level, EPNL, in units of EPNdB, as described in Section 4 of this appendix.

1. Sometimes referred to as the take-off noise measurement point.

2. Sometimes referred to as the sideline measurement point(s).

2.3.3 The aeroplane height and lateral position relative to the extended centre line of the runway shall be determined by a method independent of normal flight instrumentation, such as radar tracking, theodolite triangulation or photographic scaling techniques, to be approved by the certificating authority.

2.3.4 The aeroplane position along the flight path shall be related to the noise recorded at the noise measurement locations by means of synchronizing signals. The position of the aeroplane shall be recorded relative to the runway from a point at least 7.4 km (4 NM) from threshold during the approach and at least 11 km (6 NM) from the start of roll during take-off.

2.3.5 If the take-off test is conducted at a mass different from the maximum take-off mass at which noise certification is requested, the necessary EPNL correction shall not exceed 2 EPNdB. If the approach test is conducted at a mass different from the maximum landing mass at which noise certification is requested, the EPNL correction shall not exceed 1 EPNdB. Data approved by the certificating authority shall be used to determine the variation of EPNL with mass for both take-off and approach test conditions.

2.4 Measurements

2.4.1 Position and performance data required to make the corrections referred to in Section 5 of this appendix shall be automatically recorded at an approved sampling rate. The position of the aeroplane shall be recorded relative to the runway from a point at least 7.4 km (4 NM) from threshold to touchdown during the approach and at least 11 km (6 NM) from the start of roll during the take-off. Measuring equipment shall be approved by the certificating authority.

2.4.2 Position and performance data shall be corrected by the methods outlined in Section 5 of this appendix to the meteorological reference conditions specified in 5.3 a).

2.4.3 Acoustic data shall be corrected by the methods outlined in Section 5 of this appendix to the meteorological reference conditions specified in 5.3 a) 1), 2) and 3). Acoustic data corrections shall also be made for variations of the test minimum distance from the reference minimum distance between the aeroplane's approach path and the approach measuring point, a take-off path vertically above the flyover measuring point and for differences of more than 6 m (20 ft) in elevation of measuring locations relative to the elevation of the nearest point of the runway.

2.4.4 The aerodrome tower or another facility shall be approved for use as the central location at which measurements of atmospheric parameters are representative of those conditions existing over the geographical area in which aeroplane noise measurements are made. However, the surface wind velocity and ambient air temperature shall be measured near the microphone position at the approach, sideline, and take-off measurement locations, and the tests shall not be acceptable unless the conditions conform to Section 2 of this appendix.

3. MEASUREMENT OF AEROPLANE NOISE RECEIVED ON THE GROUND

3.1 General

3.1.1 The measurements shall provide the data for determining one-third octave band noise produced by aeroplanes during flight, at any required observation stations, as a function of time.

3.1.2 Methods for determination of the distance from the observation stations to the aeroplane shall include theodolite triangulation techniques, scaling aeroplane dimensions on photographs made as the aeroplane flies directly over the measurement points, radar altimeters, and radar tracking systems. The method used shall be approved by the certificating authority.

3.1.3 Sound pressure level data for noise evaluation purposes shall be obtained with approved acoustical equipment and measurement practices that conform to the specifications given hereunder (in 3.2 to 3.4).

3.2 Measurement system

The acoustical measurement system shall consist of approved equipment equivalent to the following:

- a) a microphone system with frequency response compatible with measurement and analysis system accuracy as stated in 3.3;
- b) tripods or similar microphone mountings that minimize interference with the sound being measured;
- c) recording and reproducing equipment characteristics, frequency response, and dynamic range compatible with the response and accuracy requirements of 3.3;
- d) acoustic calibrators using sine wave or broadband noise of known sound pressure level. If broadband noise is used, the signal shall be described in terms of its average and maximum root-mean-square (rms) value for non-overload signal level;
- e) analysis equipment with the response and accuracy requirements of 3.4.

3.3 Sensing, recording and reproducing equipment

3.3.1 The sound produced by the aeroplane shall be recorded in such a way that the complete information, time history included, is retained. A magnetic tape recorder is acceptable.

3.3.2 The characteristics of the system shall comply with the recommendations given in International Electrotechnical Commission (IEC) Publication No. 179³ with regard to the sections concerning microphone and amplifier characteristics.

Note.— The text and specifications of IEC Publication No. 179³ entitled “Precision Sound Level Meters” are incorporated by reference into this appendix and are made a part hereof.⁴

3.3.3 The response of the complete system to a sensibly plane progressive sinusoidal wave of constant amplitude shall lie within the tolerance limits specified in IEC Publication No. 179,³ over the frequency range 45 to 11 200 Hz.

3.3.4 If limitations of the dynamic range of the equipment make it necessary, high frequency pre-emphasis shall be added to the recording channel with the converse de-emphasis on playback. The pre-emphasis shall be so applied that the instantaneous recorded sound pressure level between 800 and 11 200 Hz of the maximum measured noise signal does not vary more than 20 dB between the levels of the maximum and minimum one-third octave bands.

3.3.5 The equipment shall be acoustically calibrated using facilities for acoustic free-field calibration and electronically calibrated as stated in 3.4.

3.3.6 A wind screen shall be employed with the microphone during all measurements of aeroplane noise when the wind speed is in excess of 11 km/h (6 kt). Corrections for any insertion loss produced by the wind screen, as a function of frequency, shall be applied to the measured data and the corrections applied shall be reported.

3. As amended.

4. This publication was first issued in 1965 by the Central Office of the International Electrotechnical Commission, 3 rue de Varembé, Geneva, Switzerland.

3.4 Analysis equipment

3.4.1 A frequency analysis of the acoustical signal shall be performed in a manner equivalent to using one-third octave filters complying with the recommendations given in IEC Publication No. 225.⁵

Note.— The text and specifications of IEC Publication No. 225⁵ entitled “Octave, Half-Octave and Third-Octave Band Filters Intended for the Analysis of Sounds and Vibrations” are incorporated by reference into this appendix and are made a part hereof.⁶

3.4.2 A set of 24 consecutive one-third octave filters or its equivalent shall be used. The first filter of the set shall be centred at a geometric mean frequency of 50 Hz and the last shall be centred at a geometric mean frequency of 10 kHz.

3.4.3 The analyser indicating device shall be analogue, digital, or a combination of both. The preferred sequence of signal processing shall be:

- a) squaring the one-third octave filter outputs;
- b) averaging or integrating; and
- c) linear to logarithmic conversion.

The indicating device shall have a minimum crest factor capacity of 3 and shall measure, within a tolerance of ± 1.0 dB, the true root-mean-square (rms) level of the signal in each of the 24 one-third octave bands. If other than a true rms device is utilized, it shall be calibrated for nonsinusoidal signals and time varying levels. The calibration shall provide means for converting the output levels to true rms values.

3.4.4 The dynamic response of the analyser to input signals of both full-scale and 20 dB less than full-scale amplitude shall conform to the following two requirements:

- a) the maximum output value shall read $4 \text{ dB} \pm 1 \text{ dB}$ less than the value obtained for a steady state signal of the same frequency and amplitude when a sinusoidal pulse of 0.5 s duration at the centre frequency of each one-third octave band is applied to the input;
- b) the maximum output value shall exceed the final steady state value by $0.5 \pm 0.5 \text{ dB}$ when a steady state sinusoidal signal at the geometrical mean frequency of each one-third octave band is suddenly applied to the analyser input and held constant.

3.4.5 A single value of the rms level shall be provided every 0.5 ± 0.01 s for each of the 24 one-third octave bands. The levels from all of the 24 one-third octave bands shall be obtained within a 50 ms period. No more than 5 ms of data from any 0.5 s period shall be excluded from the measurement.

3.4.6 The amplitude resolution of the analyser shall be 0.50 dB or less.

3.4.7 Each output level from the analyser shall be accurate within ± 1.0 dB with respect to the input signal, after all systematic errors have been eliminated. The total systematic errors for each of the output levels shall not exceed ± 3 dB. For contiguous filter systems, the systematic correction between adjacent one-third octave channels shall not exceed 4 dB.

3.4.8 The dynamic range capability of the analyser for display of a single aeroplane noise event shall be at least 45 dB in terms of the difference between full-scale output level and the maximum noise level of the analyser equipment.

5. As amended.

6. This publication was first issued in 1966 by the Central Office of the International Electrotechnical Commission, 3 rue de Varembe, Geneva, Switzerland.

3.4.9 The complete electronic system shall be subjected to a frequency and amplitude electrical calibration by the use of sinusoidal or broadband signals at frequencies covering the range of 45 to 11 200 Hz, and of known amplitudes covering the range of signal levels furnished by the microphone. If broadband signals are used, they shall be described in terms of their average and maximum rms values for a non-overload signal level.

3.5 Noise measurement procedures

3.5.1 The microphones shall be oriented in a known direction so that the maximum sound received arrives as nearly as reasonable in the direction for which the microphones are calibrated. The microphones shall be placed so that their sensing elements are approximately 1.2 m (4 ft) above ground.

3.5.2 Immediately prior to and after each test, a recorded acoustic calibration of the system shall be made in the field with an acoustic calibrator for the two purposes of checking system sensitivity and providing an acoustic reference level for the analysis of the sound level data.

3.5.3 For the purpose of minimizing equipment or operator error, field calibrations shall be supplemented whenever practicable with the use of an insert voltage device to place a known signal at the input of the microphone, just prior to and after recording aeroplane noise data.

3.5.4 Background noise, including ambient noise and electrical noise of the measurement systems, shall be recorded and determined in the test area with the system gain set at levels which will be used for aeroplane noise measurements. If aeroplane sound pressure levels do not exceed background sound pressure levels by at least 10 dB in any significant one-third octave band, approved corrections for the contribution of background sound pressure level to the observed sound pressure level shall be applied.

4. CALCULATION OF EFFECTIVE PERCEIVED NOISE LEVEL FROM MEASURED NOISE DATA

4.1 General

4.1.1 The basic element in the noise certification criteria shall be the noise evaluation measure designated effective perceived noise level, EPNL, in units of EPNdB, which is a single number evaluator of the subjective effects of aeroplane noise on human beings. Simply stated, EPNL shall consist of instantaneous perceived noise level, PNL, corrected for spectral irregularities (the correction, called “tone correction factor”, is made for the maximum tone only at each increment of time) and for duration.

4.1.2 Three basic physical properties of sound pressure shall be measured: level, frequency distribution, and time variation. More specifically, the instantaneous sound pressure level in each of 24 one-third octave bands of the noise shall be required for each one-half second increment of time during the aeroplane flyover.

4.1.3 The calculation procedure which utilizes physical measurements of noise to derive the EPNL evaluation measure of subjective response shall consist of the following five steps:

- a) the 24 one-third octave bands of sound pressure level are converted to perceived noisiness by means of a noy table.⁷ The noy values are combined and then converted to instantaneous perceived noise levels, $PNL(k)$;

7. See Table A1-1.

Table A1-1. Noys as a function of sound pressure level (29<SPL<89)

SPL (dB)	One-third octave band centre frequencies (Hz)																									
	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	6300	8000	10000		
29																				1.00						
30																				1.00	1.07	1.07	1.00			
31																				1.00	1.15	1.15	1.07	1.00		
32																				1.00	1.15	1.23	1.15	1.07	1.00	
33																				1.00	1.23	1.32	1.23	1.15	1.07	
34																				1.00	1.15	1.32	1.41	1.32	1.23	
35																				1.00	1.23	1.41	1.51	1.41	1.32	
36																				1.00	1.32	1.51	1.62	1.51	1.41	
37																				1.00	1.41	1.62	1.74	1.62	1.51	1.00
38																				1.00	1.51	1.74	1.86	1.74	1.62	1.10
39																				1.00	1.62	1.86	1.99	1.86	1.74	1.21
40																				1.00	1.74	1.99	2.14	1.99	1.86	1.34
41																				1.00	1.86	2.14	2.29	2.14	1.99	1.48
42																				1.00	1.99	2.29	2.45	2.29	2.14	1.63
43																				1.00	2.14	2.45	2.63	2.45	2.29	1.79
44																				1.00	2.29	2.63	2.81	2.63	2.45	1.99
45																				1.00	2.45	2.81	3.02	2.81	2.63	2.14
46																				1.00	2.63	3.02	3.23	3.02	2.81	2.29
47																				1.00	2.81	3.23	3.46	3.23	3.02	2.63
48																				1.00	3.02	3.46	3.71	3.46	3.23	2.81
49																				1.00	3.23	3.71	3.97	3.71	3.46	2.81
50																				1.00	3.46	3.97	4.26	3.97	3.71	3.02
51																				1.00	3.71	4.26	4.56	4.26	3.97	3.23
52																				1.00	4.26	4.56	4.89	4.56	4.26	3.97
53																				1.00	4.56	4.89	5.24	4.89	4.56	4.26
54																				1.00	4.89	5.24	5.61	5.24	4.89	4.56
55																				1.00	5.24	5.61	6.01	5.61	5.24	4.89
56																				1.00	6.01	6.01	6.44	6.01	5.61	5.24
57																				1.00	6.44	6.44	6.89	6.44	6.01	5.61
58																				1.00	6.89	6.89	7.39	6.89	6.44	6.01
59																				1.00	7.39	7.39	7.92	7.39	6.89	6.44
60																				1.00	7.92	7.92	8.49	7.92	7.39	6.89
61																				1.00	8.49	8.49	9.09	8.49	7.92	7.39
62																				1.00	9.09	9.09	9.74	9.09	8.49	7.92
63																				1.00	9.74	9.74	10.4	9.74	9.09	8.49
64																				1.00	10.4	10.4	11.2	10.4	9.74	9.09
65																				1.00	11.2	11.2	12.0	11.2	10.4	9.74
66																				1.00	12.0	12.0	12.8	12.0	11.2	10.4
67																				1.00	12.8	12.8	13.8	12.8	12.0	11.2
68																				1.00	13.8	13.8	14.7	13.8	12.8	12.0
69																				1.00	14.7	14.7	15.8	14.7	13.8	12.8
70																				1.00	15.8	15.8	16.9	15.8	14.7	13.8
71																				1.00	16.9	16.9	18.1	16.9	15.8	14.7
72																				1.00	18.1	18.1	19.4	18.1	16.9	15.8
73																				1.00	19.4	19.4	20.8	19.4	18.1	16.9
74																				1.00	20.8	20.8	22.3	20.8	19.4	18.1
75																				1.00	22.3	22.3	23.9	22.3	20.8	19.4
76																				1.00	23.9	23.9	25.6	23.9	22.3	20.8
77																				1.00	25.6	25.6	27.4	25.6	23.9	22.3
78																				1.00	27.4	27.4	29.4	27.4	25.6	23.9
79																				1.00	29.4	29.4	31.5	29.4	27.4	25.6
80																				1.00	31.5	31.5	33.7	31.5	29.4	27.4
81																				1.00	33.7	33.7	36.1	33.7	31.5	29.4
82																				1.00	36.1	36.1	38.7	36.1	33.7	31.5
83																				1.00	38.7	38.7	41.5	38.7	36.1	33.7
84																				1.00	41.5	41.5	44.4	41.5	38.7	36.1
85																				1.00	44.4	44.4	47.6	44.4	41.5	38.7
86																				1.00	47.6	47.6	51.0	47.6	44.4	41.5
87																				1.00	51.0	51.0	54.7	51.0	47.6	44.4
88																				1.00	54.7	54.7	58.6	54.7	51.0	47.6
89																				1.00	58.6	58.6	62.7	58.6	54.7	51.0

Table A1-1 (cont.). Noys as a function of sound pressure level (90<SPL<150)

SPL (dB)	One-third octave band centre frequencies (Hz)																								
	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	6300	8000	10000	
90	13.5	14.9	17.1	19.7	21.1	22.6	24.3	27.9	29.7	32.0	32.0	32.0	32.0	32.0	36.8	47.6	54.7	62.7	67.2	67.2	62.7	62.7	58.6	47.6	38.7
91	14.9	16.0	18.4	21.1	22.6	24.3	27.9	29.9	31.8	34.3	34.3	34.3	34.3	34.3	39.4	51.0	58.6	67.2	72.0	72.0	67.2	62.7	51.0	41.5	31.7
92	16.0	17.1	19.7	22.6	24.3	26.0	29.9	32.0	34.2	36.8	36.8	36.8	36.8	36.8	42.2	54.7	62.7	72.0	77.2	77.2	72.0	67.2	54.7	44.4	34.7
93	17.1	18.4	21.1	24.3	26.0	27.9	32.0	34.3	36.7	39.4	39.4	39.4	39.4	39.4	45.3	58.6	67.2	77.2	82.7	82.7	77.2	72.0	58.6	47.6	37.9
94	18.4	19.7	22.6	26.0	27.9	29.9	34.3	36.8	39.4	42.2	42.2	42.2	42.2	42.2	48.5	62.7	72.0	82.7	88.6	88.6	82.7	77.2	62.7	51.0	41.5
95	19.7	21.1	24.3	27.9	29.9	32.0	36.8	39.4	42.2	45.3	45.3	45.3	45.3	45.3	52.0	67.2	77.2	88.6	94.9	94.9	88.6	82.7	67.2	54.7	44.4
96	21.1	22.6	26.0	29.9	32.0	34.3	39.4	42.2	45.3	48.5	48.5	48.5	48.5	48.5	55.7	72.0	82.7	94.9	102	102	94.9	88.6	72.0	58.6	47.6
97	22.6	24.3	27.9	32.0	34.3	36.8	42.2	45.3	48.5	52.0	52.0	52.0	52.0	52.0	59.7	77.2	88.6	102	109	109	102	94.9	82.7	67.2	54.7
98	24.3	26.0	29.9	34.3	36.8	39.4	45.3	48.5	52.0	55.7	55.7	55.7	55.7	55.7	64.0	82.7	94.9	109	117	117	109	102	82.7	67.2	54.7
99	26.0	27.9	32.0	36.8	39.4	42.2	48.5	52.0	55.7	59.7	59.7	59.7	59.7	59.7	68.6	88.6	102	117	125	125	117	109	88.6	72.0	58.6
100	27.9	29.9	34.3	39.4	42.2	45.3	52.0	55.7	59.7	64.0	64.0	64.0	64.0	64.0	73.5	94.9	109	125	134	134	125	109	94.9	77.2	62.7
101	29.9	32.0	36.8	42.2	45.3	48.5	55.7	59.7	64.0	68.6	68.6	68.6	68.6	68.6	78.8	102	117	134	144	144	134	125	102	82.7	67.2
102	32.0	34.3	39.4	45.3	48.5	52.0	59.7	64.0	68.6	73.5	73.5	73.5	73.5	73.5	84.4	109	125	144	154	154	144	134	109	88.6	72.0
103	34.3	36.8	42.2	48.5	52.0	55.7	64.0	68.6	73.5	78.8	78.8	78.8	78.8	78.8	90.5	117	134	154	165	165	154	144	117	94.9	82.7
104	36.8	39.4	45.3	52.0	55.7	59.7	68.6	73.5	78.8	84.4	84.4	84.4	84.4	84.4	97.0	125	144	165	177	177	165	154	125	102	82.7
105	39.4	42.2	48.5	55.7	59.7	64.0	73.5	78.8	84.4	90.5	90.5	90.5	90.5	90.5	104	134	154	177	189	189	177	165	134	109	82.7
106	42.2	45.3	52.0	59.7	64.0	68.6	78.8	84.4	90.5	97.0	97.0	97.0	97.0	97.0	111	144	165	189	203	203	189	177	144	117	94.9
107	45.3	48.5	55.7	64.0	68.6	73.5	84.4	90.5	97.0	104	104	104	104	104	111	154	177	203	217	217	203	189	154	125	102
108	48.5	52.0	59.7	68.6	73.5	78.8	90.5	97.0	104	111	111	111	111	111	111	128	165	189	217	217	203	189	154	125	102
109	52.0	55.7	64.0	73.5	78.8	84.4	97.0	104	111	119	119	119	119	119	125	144	177	203	233	233	217	203	165	134	102
110	55.7	59.7	68.6	78.8	84.4	90.5	104	111	119	128	128	128	128	128	134	154	189	217	249	249	233	217	177	144	117
111	59.7	64.0	73.5	84.4	90.5	97.0	111	119	128	137	137	137	137	137	144	165	203	233	267	267	249	233	189	154	125
112	64.0	68.6	78.8	90.5	97.0	104	111	119	128	137	147	147	147	147	154	177	217	249	286	286	267	249	203	165	134
113	68.6	73.5	84.4	97.0	104	111	119	128	137	147	158	158	158	158	169	194	233	267	307	307	286	267	217	177	144
114	73.5	78.8	90.5	104	111	119	128	137	147	158	169	169	169	169	181	203	249	286	329	329	307	286	233	189	154
115	78.8	84.4	97.0	111	119	128	137	147	158	169	181	181	181	181	194	217	267	307	352	352	329	307	249	203	165
116	84.4	90.5	104	119	128	137	147	158	169	181	194	194	194	194	208	233	286	329	377	377	352	329	267	217	177
117	90.5	97.0	111	128	137	147	158	169	181	194	208	208	208	208	223	256	307	352	404	404	377	352	307	249	203
118	97.0	104	119	137	147	158	169	181	194	208	223	223	223	223	239	274	329	377	433	433	404	377	329	267	217
119	104	111	128	147	158	169	181	194	208	223	239	239	239	239	256	294	352	404	464	464	433	404	329	267	217
120	111	119	137	158	169	181	194	208	223	239	256	256	256	256	274	311	377	433	497	497	464	433	352	286	233
121	119	128	147	169	181	194	208	223	239	256	274	274	274	274	294	338	404	464	533	533	503	476	377	307	249
122	128	137	158	181	194	208	223	239	256	274	294	294	294	294	315	351	422	485	557	557	533	503	404	329	267
123	137	147	169	194	208	223	239	256	274	294	315	315	315	315	338	388	464	533	611	611	586	557	464	377	307
124	147	158	181	208	223	239	256	274	294	315	338	338	338	338	368	422	503	586	665	665	639	611	503	404	329
125	158	169	194	223	239	256	274	294	315	338	362	362	362	362	394	453	533	611	702	702	676	649	533	433	352
126	169	181	208	239	256	274	315	338	362	388	388	388	388	388	422	497	586	676	772	772	746	719	603	503	404
127	181	194	223	256	274	294	338	362	388	416	416	416	416	416	446	520	603	693	799	799	772	746	639	533	433
128	194	208	239	274	294	315	362	388	416	446	446	446	446	446	485	572	665	772	886	886	859	832	725	627	529
129	208	223	256	294	315	338	388	416	446	485	485	485	485	485	520	603	702	816	930	930	903	876	769	672	574
130	223	239	274	315	338	362	416	446	485	520	520	520	520	520	557	640	746	860	974	974	947	920	813	716	618
131	239	256	294	338	362	388	446	485	520	557	557	557	557	557	597	686	799	913	1027	1027	1000	973	866	769	672
132	256	274	315	362	388	416	485	520	557	597	597	597	597	597	640	735	849	963	1077	1077	1050	1023	916	819	722
133	274	294	338	388	416	446	520	557	597	640	640	640	640	640	686	788	892	1006	1120	1120	1093	1066	959	862	765
134	294	315	362	416	446	485	572	603	640	676	676	676	676	676	720	822	926	1040	1154	1154	1127	1100	993	896	799
135	315	338	388	446	485	520	603	640	676	720	720	720	720	720	764	866	970	1084	1198	1198	1171	1144	1037	940	843
136	338	362	416	485	520	557	640	676	720	764	764	764	764	764	808	910	1014	1128	1242	1242	1215	1188	1081	984	887
137	362	388	446	520	557	597	686	720	764	808	808	808	808	808	852	954	1058	1172	1286	1286	1259	1232	1125	1028	931
138	388	416	485	572	603	640	735	764	808	852	852	852	852	852	896	998	1102	1216	1330	1330	1303	1276	1169	1072	975
139	416	446	520	603	640	676	772	808	852	896	896	896	896	896	940	1042	1146	1260	1374	1374	1347	1320	1213	1116	1019
140	446	476	549	630	676	720	816	852	896	940	940	940	940	940	984	1086	1190	1304	1418	1418	1391	1364	1257	1160	1063
141	476	512	586	676	720	764	860	896	940	984	984	984	984	984	1028	1130	1234	1348	1462	1462	1435	1408	1301	1204	1107
142	512	549	630	720	764	808	904	940	984	1028	1028	1028	1028	1028	1072	1174	1278	1392	1506	1506	1479	1452	1345	1248	1151
143	549	586	676	764	808	852	948	984	1028	1072	1072	1072	1072	1072	1116	1218	1322	1436							

- b) a tone correction factor, $C(k)$, is calculated for each spectrum to account for the subjective response to the presence of spectral irregularities;
- c) the tone correction factor is added to the perceived noise level to obtain tone corrected perceived noise levels, $PNLT(k)$, at each one-half second increment of time:

$$PNLT(k) = PNL(k) + C(k)$$

The instantaneous values of tone corrected perceived noise level are derived and the maximum value, $PNLTM$, is determined;

- d) a duration correction factor, D , is computed by integration under the curve of tone corrected perceived noise level versus time;
- e) effective perceived noise level, $EPNL$, is determined by the algebraic sum of the maximum tone corrected perceived noise level and the duration correction factor:

$$EPNL = PNLTM + D.$$

4.2 Perceived noise level

Instantaneous perceived noise levels, $PNL(k)$, shall be calculated from instantaneous one-third octave band sound pressure levels, $SPL(i,k)$, as follows:

Step 1. Convert each one-third octave band, $SPL(i,k)$, from 50 to 10 000 Hz, to perceived noisiness, $n(i,k)$, by reference to Table A1-1, or to the mathematical formulation of the noy table given in Section 7.

Step 2. Combine the perceived noisiness values, $n(i,k)$, found in Step 1 by the following formula:

$$\begin{aligned} N(k) &= n(k) + 0.15 \left\{ \left[\sum_{i=1}^{24} n(i,k) \right] - n(k) \right\} \\ &= 0.85 n(k) + 0.15 \sum_{i=1}^{24} n(i,k) \end{aligned}$$

where $n(k)$ is the largest of the 24 values of $n(i,k)$, and $N(k)$ is the total perceived noisiness.

Step 3. Convert the total perceived noisiness, $N(k)$, into perceived noise level, $PNL(k)$, by the following formula:

$$PNL(k) = 40.0 + \frac{10}{\log 2} \log N(k)$$

which is plotted in Figure A1-1. $PNL(k)$ may also be obtained by choosing $N(k)$ in the 1 000 Hz column of Table A1-1 and then reading the corresponding value of $SPL(i,k)$ which, at 1 000 Hz, equals $PNL(k)$.

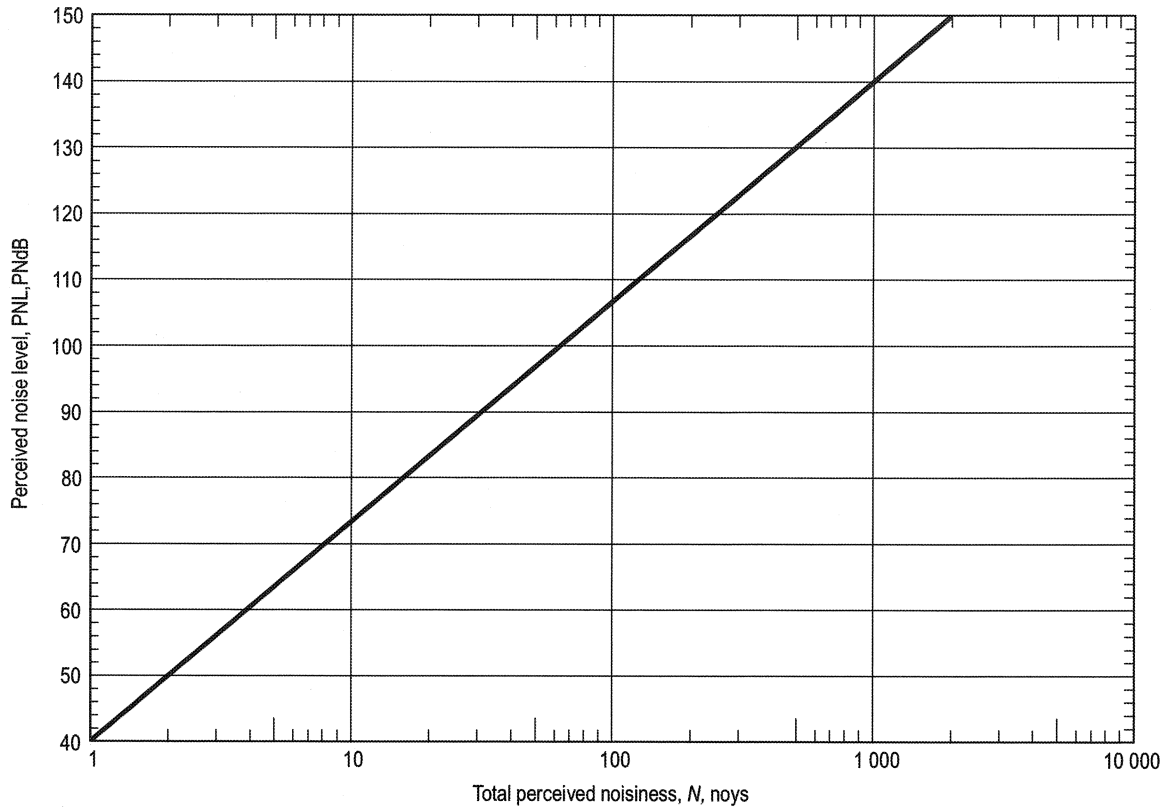


Figure A1-1. Perceived noise level as a function of total perceived noisiness

4.3 Correction for spectral irregularities

Noise having pronounced spectral irregularities (for example, the maximum discrete frequency components or tones) shall be adjusted by the correction factor, $C(k)$, calculated as follows:

Step 1. Starting with the corrected sound pressure level in the 80 Hz one-third octave band (band number 3), calculate the changes in sound pressure level (or “slopes”) in the remainder of the one-third octave bands as follows:

$$s(3,k) = \text{no value}$$

$$s(4,k) = \text{SPL}(4,k) - \text{SPL}(3,k)$$

•

•

•

$$s(i,k) = \text{SPL}(i,k) - \text{SPL}[(i-1),k]$$

•

•

•

$$s(24,k) = \text{SPL}(24,k) - \text{SPL}(23,k)$$

Step 2. Encircle the value of the slope, $s(i,k)$, where the absolute value of the change in slope is greater than five; that is, where:

$$|\Delta s(i,k)| = |s(i,k) - s[(i-1),k]| > 5$$


Step 3.

- a) If the encircled value of the slope $s(i,k)$ is positive and algebraically greater than the slope $s[(i-1),k]$, encircle $SPL(i,k)$.
- b) If the encircled value of the slope $s(i,k)$ is zero or negative and the slope $s[(i-1),k]$ is positive, encircle $SPL[(i-1),k]$.
- c) For all other cases, no sound pressure level value is to be encircled.

Step 4. Omit all $SPL(i,k)$ encircled in Step 3 and compute new adjusted sound pressure levels, $SPL'(i,k)$, as follows:

- a) For non-encircled sound pressure levels, let the new sound pressure levels equal the original sound pressure levels, $SPL'(i,k) = SPL(i,k)$.

Table A1-2. Tone correction factors

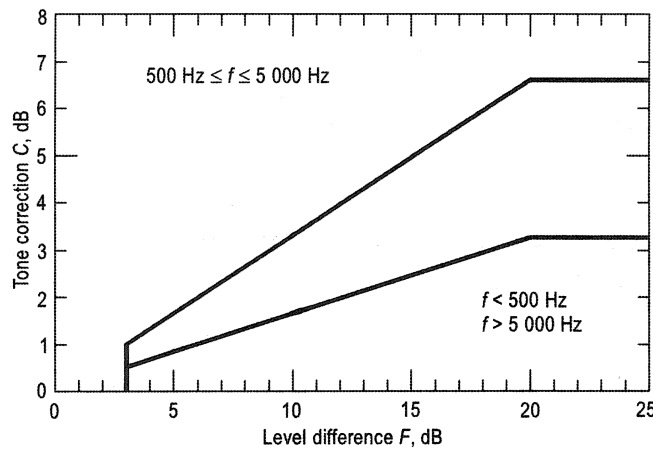

Frequency f , Hz	Level difference F , dB	Tone correction C , dB
$50 \leq f < 500$	$3 \leq F < 20$	$F/6$
	$20 \leq F$	$3\frac{1}{3}$
$500 \leq f \leq 5\,000$	$3 \leq F < 20$	$F/3$
	$20 \leq F$	$6\frac{2}{3}$
$5\,000 < f \leq 10\,000$	$3 \leq F < 20$	$F/6$
	$20 \leq F$	$3\frac{1}{3}$

* See Step 8 of 4.3.

- b) For encircled sound pressure levels in bands 1 to 23 inclusive, let the new sound pressure level equal the arithmetic average of the preceding and following sound pressure levels:

$$SPL'(i,k) = (1/2) \{ SPL[(i-1),k] + SPL[(i+1),k] \}$$

- c) If the sound pressure level in the highest frequency band ($i = 24$) is encircled, let the new sound pressure level in that band equal:

$$\text{SPL}'(24,k) = \text{SPL}(23,k) + s(23,k)$$

Step 5. Recompute new slopes $s'(i,k)$, including one for an imaginary 25th band, as follows:

$$s'(3,k) = s'(4,k)$$

$$s'(4,k) = \text{SPL}'(4,k) - \text{SPL}'(3,k)$$

•

•

•

$$s'(i,k) = \text{SPL}'(i,k) - \text{SPL}'[(i-1),k]$$

•

•

•

$$s'(24,k) = \text{SPL}'(24,k) - \text{SPL}'(23,k)$$

$$s'(25,k) = s'(24,k)$$

Step 6. For i from 3 to 23, compute the arithmetic average of the three adjacent slopes as follows:

$$\bar{s}(i,k) = (1/3) \{ s'(i,k) + s'[(i+1),k] + s'[(i+2),k] \}$$

Step 7. Compute final one-third octave-band background sound pressure levels, $\text{SPL}''(i,k)$, by beginning with band number 3 and proceeding to band number 24 as follows:

$$\text{SPL}''(3,k) = \text{SPL}(3,k)$$

$$\text{SPL}''(4,k) = \text{SPL}''(3,k) + \bar{s}(3,k)$$

•

•

•

$$\text{SPL}''(i,k) = \text{SPL}''[(i-1),k] + \bar{s}(i-1,k)$$

•

•

•

$$\text{SPL}''(24,k) = \text{SPL}''(23,k) + \bar{s}(23,k)$$

Step 8. Calculate the differences, $F(i,k)$, between the original sound pressure level and the final background sound pressure level as follows:

$$F(i,k) = \text{SPL}(i,k) - \text{SPL}''(i,k)$$

and note only values equal to or greater than three.

Step 9. For each of the relevant one-third octave bands (3 to 24), determine tone correction factors from the sound pressure level differences, $F(i,k)$, and Table A1-2.

Step 10. Designate the largest of the tone correction factors, determined in Step 9, as $C(k)$. An example of the tone correction procedure is given in Table A1-3.

Tone corrected perceived noise levels $\text{PNLT}(k)$ shall be determined by adding the $C(k)$ values to corresponding $\text{PNLT}(k)$ values, that is:

Table A1-3. Example of tone correction calculation for a turbofan engine

①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪
Band (i)	f Hz	SPL dB	S dB Step 1	1ΔS1 dB Step 2	SPL' dB Step 4	S' dB Step 5	\bar{s} dB Step 6	SPL'' dB Step 7	F' dB Step 8	C dB Step 9
1	50	—	—	—	—	—	—	—	—	—
2	63	—	—	—	—	—	—	—	—	—
3	80	70	—	—	70	-8	-2 ¹ / ₃	70	—	—
4	100	62	-8	—	62	-8	+3 ¹ / ₃	67 ² / ₃	—	—
5	125	⑦0	+⑧	16	71	+9	+6 ² / ₃	71	—	—
6	160	80	+10	2	80	+9	+2 ² / ₃	77 ² / ₃	—	—
7	200	82	+②	8	82	+2	-1 ¹ / ₃	80 ¹ / ₃	—	—
8	250	⑧3	+1	1	79	-3	-1 ¹ / ₃	79	4	2 ¹ / ₃
9	315	76	-⑦	8	76	-3	+1 ¹ / ₃	77 ² / ₃	—	—
10	400	⑧0	+④	11	78	+2	+1	78	—	—
11	500	80	0	4	80	+2	0	79	—	—
12	630	79	-1	1	79	-1	0	79	—	—
13	800	78	-1	0	78	-1	-1 ¹ / ₃	79	—	—
14	1 000	80	+2	3	80	+2	-2 ¹ / ₃	78 ² / ₃	—	—
15	1 250	78	-2	4	78	-2	-1 ¹ / ₃	78	—	—
16	1 600	76	-2	0	76	-2	+1 ¹ / ₃	77 ² / ₃	—	—
17	2 000	79	+3	5	79	+3	+1	78	—	—
18	2 500	⑧5	+6	3	79	0	-1 ¹ / ₃	79	6	2
19	3 150	79	-⑥	12	79	0	-2 ² / ₃	78 ² / ₃	—	—
20	4 000	78	-1	5	78	-1	-6 ¹ / ₃	76	—	—
21	5 000	71	-⑦	6	71	-7	-8	69 ² / ₃	—	—
22	6 300	60	-11	4	60	-11	-8 ² / ₃	61 ² / ₃	—	—
23	8 000	54	-6	5	54	-6	-8	53	—	—
24	10 000	45	-9	3	45	-9	—	45	—	—
						-9				

Step 1	③ (i) - ③ (i - 1)
Step 2	④ (i) - ④ (i - 1)
Step 3	see instructions
Step 4	see instructions
Step 5	⑥ (i) - ⑥ (i - 1)

Step 6	[⑦ (i) + ⑦ (i + 1) + ⑦ (i + 2)] ÷ 3
Step 7	⑨ (i - 1) + ⑧ (i - 1)
Step 8	③ (i) - ⑨ (i)
Step 9	see Table A1-2

$$\text{PNLT}(k) = \text{PNL}(k) + C(k)$$

For any i -th one-third octave band, at any k -th increment of time, for which the tone correction factor is suspected to result from something other than (or in addition to) an actual tone (or any spectral irregularity other than aeroplane noise), an additional analysis shall be made using a filter with a bandwidth narrower than one-third of an octave. If the narrow band analysis corroborates these suspicions, then a revised value for the background sound pressure level, $\text{SPL}''(i,k)$, shall be determined from the narrow band analysis and used to compute a revised tone correction factor for that particular one-third octave band.

4.4 Maximum tone corrected perceived noise level

4.4.1 The maximum tone corrected perceived noise level, PNLTM , shall be the maximum calculated value of the tone corrected perceived noise level $\text{PNLT}(k)$. It shall be calculated in accordance with the procedure of 4.3. To obtain a satisfactory noise time history, measurements shall be made at half-second time intervals.

Note.— Figure A1-2 is an example of a flyover noise time history where the maximum value is clearly indicated.

4.4.2 If there are no pronounced irregularities in the spectrum, even when examined by a narrow band analysis, then the procedure of 4.3 shall be disregarded since $\text{PNLT}(k)$ would be identically equal to $\text{PNL}(k)$. For this case, PNLTM shall be the maximum value of $\text{PNL}(k)$ and would equal PNLM .

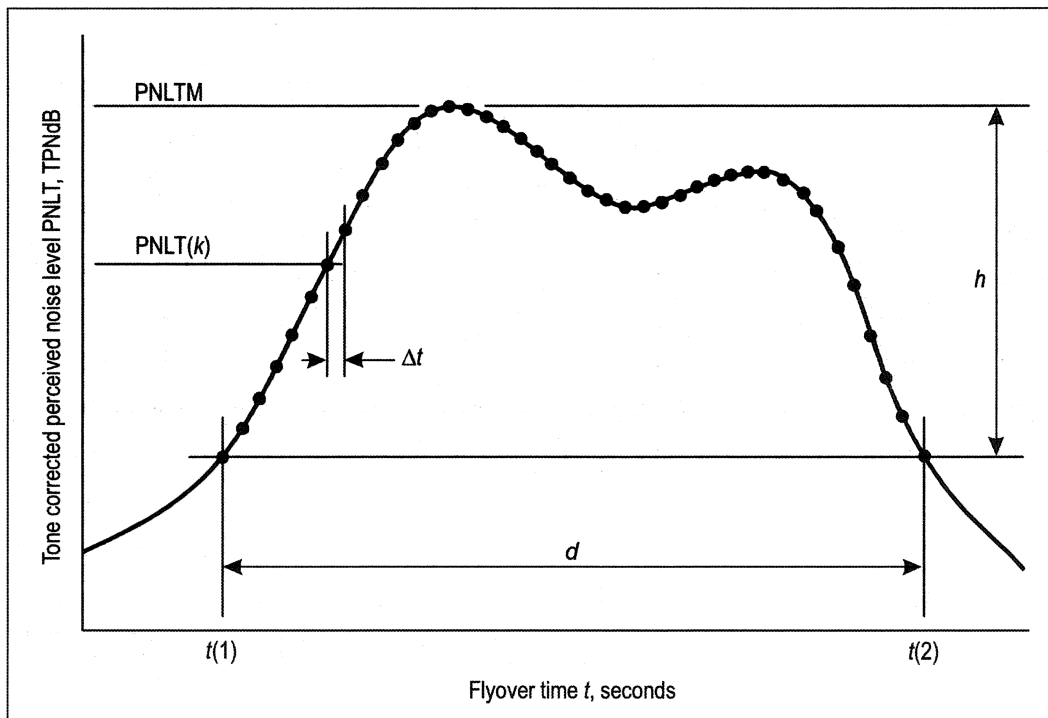


Figure A1-2. Example of perceived noise level corrected for tones as a function of aircraft flyover time

4.5 Duration correction

4.5.1 The duration correction factor, D , determined by the integration technique shall be defined by the expression:

$$D = 10 \log \left[\left(\frac{1}{T} \right) \int_{t(1)}^{t(2)} \text{anti log} \frac{\text{PNLT}}{10} dt \right] - \text{PNLTM}$$

where T is a normalizing time constant, and PNLTM is the maximum value of PNLT.

4.5.1.1 If PNLTM is greater than 100 TPNdB, $t(1)$ shall be the first point of time after which PNLT becomes greater than PNLTM – 10 and $t(2)$ shall be the point of time after which PNLT remains constantly less than PNLTM – 10.

4.5.1.2 If PNLTM is less than 100 TPNdB, $t(1)$ shall be the first point of time after which PNLT becomes greater than 90 TPNdB and $t(2)$ shall be the point of time after which PNLT remains constantly less than 90 TPNdB.

4.5.1.3 If PNLTM is less than 90 TPNdB, the duration correction shall be taken as equal to 0.

4.5.2 Since PNLT is calculated from measured values of SPL, there will, in general, be no obvious equation for PNLT as a function of time. Consequently, the equation shall be rewritten with a summation sign instead of an integral sign as follows:

$$D = 10 \log \left[\left(\frac{1}{T} \right) \sum_{k=0}^{d/\Delta t} \Delta t \cdot \text{antilog} \frac{\text{PNLT}(k)}{10} \right] - \text{PNLTM}$$

where Δt is the length of the equal increments of time for which PNLT(k) is calculated and d is the time interval to the nearest 1.0 second during which PNLT(k) remains greater or equal either to PNLTM – 10 or to 90 according to the cases specified in 4.5.1.1 to 4.5.1.3.

4.5.3 To obtain a satisfactory history of the perceived noise level,

- a) half-second time intervals for Δt , or
- b) a shorter time interval with approved limits and constants,

shall be used.

4.5.4 The following values for T and Δt shall be used in calculating D in the procedure given in 4.5.2:

$$T = 10 \text{ s, and}$$

$$\Delta t = 0.5 \text{ s}$$

Using the above values, the equation for D becomes

$$D = 10 \log \left[\sum_{k=0}^{2d} \text{antilog} \frac{\text{PNLT}(k)}{10} \right] - \text{PNLTM} - 13$$

where the integer d is the duration time defined by the points corresponding to the values PNLTM – 10 or 90 as the case may be.

4.5.5 If in the procedures given in 4.5.2, the limits of PNLTM – 10 or 90 fall between the calculated PNLT(k) values (the usual case), the PNLT(k) values defining the limits of the duration interval shall be chosen from the PNLT(k) values closest to PNLTM – 10 or 90 as the case may be.

4.6 Effective perceived noise level

The total subjective effect of an aeroplane flyover, designated “effective perceived noise level”, EPNL, shall be equal to the algebraic sum of the maximum value of the tone corrected perceived noise level, PNLTM, and the duration correction, D . That is:

$$\text{EPNL} = \text{PNLTM} + D$$

where PNLTM and D are calculated in accordance with the procedures given in 4.2, 4.3, 4.4 and 4.5. If the duration correction D is negative and greater than $\text{PNLTM} - 90$ in absolute values, D shall be taken as equal to $90 - \text{PNLTM}$.

5. REPORTING OF DATA TO THE CERTIFICATING AUTHORITY AND CORRECTING MEASURED DATA

5.1 General

Data representing physical measurements or corrections to measured data shall be recorded in permanent form and appended to the record except that corrections to measurements for normal equipment response deviations need not be reported. All other corrections shall be approved. Attempts shall be made to keep to a minimum the individual errors inherent in each of the operations employed in obtaining the final data.

5.2 Data reporting

5.2.1 Measured and corrected sound pressure levels shall be presented in one-third octave band levels obtained with equipment conforming to the Standards described in Section 3 of this appendix.

5.2.2 The type of equipment used for measurement and analysis of all acoustic aeroplane performance and meteorological data shall be reported.

5.2.3 The following atmospheric environmental data, measured immediately before, after, or during each test at the observation points prescribed in Section 2 of this appendix shall be reported:

- a) air temperature and relative humidity;
- b) maximum, minimum and average wind velocities;
- c) atmospheric pressure.

5.2.4 Comments on local topography, ground cover, and events that might interfere with sound recordings shall be reported.

5.2.5 The following aeroplane information shall be reported:

- a) type, model, serial numbers (if any) of aeroplane and engines;
- b) gross dimensions of aeroplane and location of engines;
- c) aeroplane gross mass for each test run;

- d) aeroplane configuration such as flap and landing gear position;
- e) indicated airspeed in kilometres per hour (knots);
- f) engine performance in terms of net thrust, engine pressure ratios, jet exhaust temperatures and fan or compressor shaft rotational speeds as determined from aeroplane instruments and manufacturer's data;
- g) aeroplane height above ground determined by a method independent of cockpit instrumentation, such as radar tracking, theodolite triangulation or photographic scaling techniques, to be approved by the certification authorities.

5.2.6 Aeroplane speed and position and engine performance parameters shall be recorded at an approved sampling rate sufficient to correct to the noise certification reference conditions prescribed in this section and shall be synchronized with the noise measurement.

5.2.6.1 Lateral position relative to the extended centre line of the runway, configuration and gross mass shall be reported.

5.3 Noise certification reference conditions

Aeroplane position and performance data and the noise measurements shall be corrected to the following noise certification reference conditions:

- a) meteorological conditions:
 - 1) sea level atmospheric pressure of 1 013.25 hPa;
 - 2) ambient air temperature of 25°C, i.e. ISA + 10°C except that, at the discretion of the certifying authority, an alternative reference ambient air temperature of 15°C, i.e. ISA may be used;
 - 3) relative humidity of 70 per cent; and
 - 4) zero wind;
- b) aeroplane conditions:
 - 1) maximum take-off mass and landing mass at which noise certification is requested;
 - 2) approach angle of 3°; and
 - 3) aeroplane height of 120 m (394 ft) above the approach noise measuring station.

5.4 Data correction

5.4.1 The noise data shall be corrected to the noise certification reference conditions as stated in 5.3. The measured atmospheric conditions shall be those obtained in accordance with Section 2 of this appendix. Atmospheric attenuation of sound requirements are given in Section 8 of this appendix. If a reference ambient air temperature of 15°C is used (see 5.3 a) 2)) a further correction of +1 EPNdB shall be added to the noise levels obtained at the flyover measurement point.

5.4.2 The measured flight path shall be corrected by an amount equal to the difference between the applicant's predicted flight paths for the test conditions and for the noise certification reference conditions.

Note.— Necessary corrections relating to aeroplane flight path or performance may be derived from approved data other than certification test data.

5.4.2.1 The flight path correction procedure for approach noise shall be made with reference to a fixed aeroplane reference height and the reference approach angle. The effective perceived noise level correction shall be less than 2 EPNdB to allow for:

- a) the aeroplane not passing vertically above the measuring point;
- b) the difference between the reference height and the height of the aeroplane's ILS antenna from the approach measuring point; and
- c) the difference between the reference and the test approach angles.

Note.— Detailed correction requirements are given in Section 9 of this appendix.

5.4.3 Test results on specific measurement shall not be accepted if the difference in EPNL computed from measured data and that corrected to reference conditions exceeds 15 EPNdB.

5.4.4 If aeroplane sound pressure levels do not exceed the ambient sound pressure levels by at least 10 dB in any one-third octave band, approved corrections for the contribution of ambient sound pressure level to the observed sound pressure level shall be applied.

5.5 Validity of results

5.5.1 Three average EPNL values and their 90 per cent confidence limits shall be produced from the test results, each such value being the arithmetical average of the corrected acoustical measurements for all valid test runs at the appropriate measurement point (take-off, approach or sideline). If more than one acoustic measurement system is used at any single measurement location (such as for the symmetrical sideline measuring points), the resulting data for each test run shall be averaged as a single measurement.

5.5.2 The minimum sample size acceptable for each of the three certification measuring points shall be six. The samples shall be large enough to establish statistically for each of the three average noise certification levels a 90 per cent confidence limit not exceeding ± 1.5 EPNdB. No test result shall be omitted from the average process unless otherwise specified by the certification authorities.

5.5.3 The average EPNL values and their 90 per cent confidence limits obtained by the foregoing process shall be those by which the noise performance of the aeroplane is assessed against the noise certification criteria, and shall be reported.

6. NOMENCLATURE

6.1 Symbols and units

Note.— The meanings of the various symbols in this appendix are as follows. It is recognized that differences may exist in the units and meanings of similar symbols in Appendix 2.

<i>Symbol</i>	<i>Unit</i>	<i>Meaning</i>
antilog	—	Antilogarithm to the base 10.
$C(k)$	dB	Tone correction factor. The factor to be added to PNL(k) to account for the presence of spectral irregularities such as tones at the k -th increment of time.

<i>Symbol</i>	<i>Unit</i>	<i>Meaning</i>
d	s	<i>Duration time.</i> The length of the significant noise time history being the time interval between the limits of $t(1)$ and $t(2)$ to the nearest second.
D	dB	<i>Duration correction.</i> The factor to be added to PNLTM to account for the duration of the noise.
EPNL	EPNdB	<i>Effective perceived noise level.</i> The value of PNL adjusted for both the spectral irregularities and the duration of the noise. (The unit EPNdB is used instead of the unit dB.)
$f(i)$	Hz	<i>Frequency.</i> The geometrical mean frequency for the i -th one-third octave band.
$F(i,k)$	dB	<i>Delta-dB.</i> The difference between the original sound pressure level and the final background sound pressure level in the i -th one-third octave band at the k -th interval of time.
h	dB	<i>dB-down.</i> The level to be subtracted from PNLTM that defines the duration of the noise.
H	%	<i>Relative humidity.</i> The ambient atmospheric relative humidity.
i	—	<i>Frequency band index.</i> The numerical indicator that denotes any one of the 24 one-third octave bands with geometrical mean frequencies from 50 to 10 000 Hz.
k	—	<i>Time increment index.</i> The numerical indicator that denotes the number of equal time increments that have elapsed from a reference zero.
log	—	<i>Logarithm to the base 10.</i>
$\log n(a)$	—	<i>Noy discontinuity coordinate.</i> The log n value of the intersection point of the straight lines representing the variation of SPL with log n .
$M(b), M(c)$, etc.	—	<i>Noy inverse slope.</i> The reciprocals of the slopes of straight lines representing the variation of SPL with log n .
n	noy	<i>Perceived noisiness.</i> The perceived noisiness at any instant of time that occurs in a specified frequency range.
$n(i,k)$	noy	<i>Perceived noisiness.</i> The perceived noisiness at the k -th instant of time that occurs in the i -th one-third octave band.
$n(k)$	noy	<i>Maximum perceived noisiness.</i> The maximum value of all of the 24 values of $n(i)$ that occurs at the k -th instant of time.
$N(k)$	noy	<i>Total perceived noisiness.</i> The total perceived noisiness at the k -th instant of time calculated from the 24 instantaneous values of $n(i,k)$.
$p(b), p(c)$, etc.	—	<i>Noy slope.</i> The slopes of straight lines representing the variation of SPL with log n .
PNL	PNdB	<i>Perceived noise level.</i> The perceived noise level at any instant of time. (The unit PNdB is used instead of the unit dB.)
PNL(k)	PNdB	<i>Perceived noise level.</i> The perceived noise level calculated from the 24 values of SPL(i,k) at the k -th increment of time. (The unit PNdB is used instead of the unit dB.)

<i>Symbol</i>	<i>Unit</i>	<i>Meaning</i>
PNLM	PNdB	<i>Maximum perceived noise level.</i> The maximum value of PNL(k). (The unit PNdB is used instead of the unit dB.)
PNLT	TPNdB	<i>Tone corrected perceived noise level.</i> The value of PNL adjusted for the spectral irregularities that occur at any instant of time. (The unit TPNdB is used instead of the unit dB.)
PNLT(k)	TPNdB	<i>Tone corrected perceived noise level.</i> The value of PNL(k) adjusted for the spectral irregularities that occur at the k -th increment of time. (The unit TPNdB is used instead of the unit dB.)
PNLTM	TPNdB	<i>Maximum tone corrected perceived noise level.</i> The maximum value of PNLT(k). (The unit TPNdB is used instead of the unit dB.)
$s(i,k)$	dB	<i>Slope of sound pressure level.</i> The change in level between adjacent one-third octave band sound pressure levels at the i -th band for the k -th instant of time.
$\Delta s(i,k)$	dB	<i>Change in slope of sound pressure level.</i>
$s'(i,k)$	dB	<i>Adjusted slope of sound pressure level.</i> The change in level between adjacent adjusted one-third octave band sound pressure levels at the i -th band for the k -th instant of time.
$\bar{s}(i,k)$	dB	<i>Average slope of sound pressure level.</i>
SPL	dB re 20 μ Pa	<i>Sound pressure level.</i> The sound pressure level at any instant of time that occurs in a specified frequency range.
SPL(a)	dB re 20 μ Pa	<i>Noise discontinuity coordinate.</i> The SPL value of the intersection point of the straight lines representing the variation of SPL with $\log n$.
SPL(b) SPL(c)	dB re 20 μ Pa	<i>Noise intercept.</i> The intercepts on the SPL-axis of the straight lines representing the variation of SPL with $\log n$.
SPL(i,k)	dB re 20 μ Pa	<i>Sound pressure level.</i> The sound pressure level at the k -th instant of time that occurs in the i -th one-third octave band.
SPL' (i,k)	dB re 20 μ Pa	<i>Adjusted sound pressure level.</i> The first approximation to background sound pressure level in the i -th one-third octave band for the k -th instant of time.
SPL(i)	dB re 20 μ Pa	<i>Maximum sound pressure level.</i> The sound pressure level that occurs in the i -th one-third octave band of the spectrum for PNLTM.
SPL(i) _c	dB re 20 μ Pa	<i>Corrected maximum sound pressure level.</i> The sound pressure level that occurs in the i -th one-third octave band of the spectrum for PNLTM corrected for atmospheric sound absorption.
SPL''(i,k)	dB re 20 μ Pa	<i>Final background sound pressure level.</i> The second and final approximation to background sound pressure level in the i -th one-third octave band for the k -th instant of time.
t	s	<i>Elapsed time.</i> The length of time measured from a reference zero.
t_1, t_2	s	<i>Time limit.</i> The beginning and end of the significant noise time history defined by h .

<i>Symbol</i>	<i>Unit</i>	<i>Meaning</i>
Δt	s	<i>Time increment.</i> The equal increments of time for which PNL(k) and PNL(k) are calculated.
T	s	<i>Normalizing time constant.</i> The length of time used as a reference in the integration method for computing duration corrections, where $T = 10$ s.
$t(^{\circ}\text{C})$	$^{\circ}\text{C}$	<i>Temperature.</i> The ambient atmospheric temperature.
$\alpha(i)$	dB/100 m	<i>Test atmospheric absorption.</i> The atmospheric attenuation of sound that occurs in the i -th one-third octave band for the measured atmospheric temperature and relative humidity.
$\alpha(i)_o$	dB/100 m	<i>Reference atmospheric absorption.</i> The atmospheric attenuation of sound that occurs in the i -th one-third octave band for a reference atmospheric temperature and relative humidity.
β	degrees	<i>First constant* climb angle.</i>
γ	degrees	<i>Second constant** climb angle.</i>
δ	degrees	<i>Thrust cutback angles.</i> The angles defining the points on the take-off flight path at which thrust reduction is started and ended, respectively.
ϵ	degrees	
η	degrees	<i>Approach angle.</i>
η_r	degrees	<i>Reference approach angle.</i>
θ	degrees	<i>Take-off noise angle.</i> The angle between the flight path and noise path for take-off operations. It is identical for both measured and corrected flight paths.
λ	degrees	<i>Approach noise angle.</i> The angle between the flight path and the noise path for approach operations. It is identical for both measured and corrected flight paths.
Δ_1	EPNdB	<i>PNLT correction.</i> The correction to be added to the EPNL calculated from measured data to account for noise level changes due to differences in atmospheric absorption and noise path length between reference and test conditions.
Δ_2	EPNdB	<i>Noise path duration correction.</i> The correction to be added to the EPNL calculated from measured data to account for noise level changes due to the noise duration because of differences in flyover altitude between reference and test conditions.
Δ_3	EPNdB	<i>Mass correction.</i> The correction to be added to the EPNL calculated from measured data to account for noise level changes due to differences between maximum mass and actual mass of the test aeroplane.
Δ_4	EPNdB	<i>Approach angle correction.</i> The correction to be added to the EPNL calculated from measured data to account for noise level changes due to differences between the reference and the test approach angles.

* Gear up, speed of at least $V_2 + 19$ km/h ($V_2 + 10$ kt), take-off thrust.

** Gear up, speed of at least $V_2 + 19$ km/h ($V_2 + 10$ kt), after cutback.

<i>Symbol</i>	<i>Unit</i>	<i>Meaning</i>
ΔAB	metres	<i>Take-off profile changes.</i> The algebraic changes in the basic parameters defining the take-off profile due to differences between reference and test conditions.
ΔB	degrees	
$\Delta \gamma$	degrees	
$\Delta \delta$	degrees	
$\Delta \epsilon$	degrees	

6.2 Flight profile identification positions

<i>Position</i>	<i>Description</i>
A	Start of take-off roll.
B	Lift-off.
C	Start of first constant climb.
D	Start of thrust reduction.
E	Start of second constant climb.
E_c	Start of second constant climb on corrected flight path.
F	End of noise certification take-off flight path.
F_c	End of noise certification corrected take-off flight path.
G	Start of noise certification approach flight path.
G_r	Start of noise certification approach on reference flight path.
H	Position on approach path directly above noise measuring station.
H_r	Position on reference approach path directly above noise measuring station.
I	Start of level-off.
I_r	Start of level-off on reference approach flight path.
J	Touchdown.
K	Flyover noise measurement point.
L	Lateral noise measurement point(s) (not on flight track).
M	End of noise certification take-off flight track.
N	Approach noise measurement point.
O	Threshold of approach end of runway.
P	Start of noise certification approach flight track.
Q	Position on measured take-off flight path corresponding to apparent PNLTM at station K. See 9.2.
Q_c	Position on corrected take-off flight path corresponding to PNLTM at station K. See 9.2.
R	Position on measured take-off flight path nearest to station K.
R_c	Position on corrected take-off flight path nearest to station K.
S	Position on measured approach flight path corresponding to PNLTM at station N.

<i>Position</i>	<i>Description</i>
S_r	Position on reference approach flight path corresponding to PNLTM at station N.
T	Position on measured approach flight path nearest to station N.
T_r	Position on reference approach flight path nearest to station N.
X	Position on measured take-off flight path corresponding to PNLTM at station L.

6.3 Flight profile distances

<i>Distance</i>	<i>Unit</i>	<i>Meaning</i>
AB	metres	<i>Length of take-off roll.</i> The distance along the runway between the start of take-off roll and lift-off.
AK	metres	<i>Take-off measurement distance.</i> The distance from the start of roll to the take-off noise measurement station along the extended centre line of the runway.
AM	metres	<i>Take-off flight track distance.</i> The distance from the start of roll to the take-off flight track position along the extended centre line of the runway for which the position of the aeroplane need no longer be recorded.
KQ	metres	<i>Measured take-off noise path.</i> The distance from station K to the measured aeroplane position Q.
KQ_c	metres	<i>Corrected take-off noise path.</i> The distance from station K to the corrected aeroplane position Q_c .
KR	metres	<i>Measured take-off minimum distance.</i> The distance from station K to point R on the measured flight path.
KR_c	metres	<i>Corrected take-off minimum distance.</i> The distance from station K to point R_c on the corrected flight path.
LX	metres	<i>Measured sideline noise path.</i> The distance from station L to the measured aeroplane position X.
NH	metres (feet)	<i>Aeroplane approach height.</i> The height of the aeroplane above the approach measuring station.
NH_r	metres (feet)	<i>Reference approach height.</i> The height of the reference approach path above the approach measuring station.
NS	metres	<i>Measured approach noise path.</i> The distance from station N to the measured aeroplane position S.
NS_r	metres	<i>Reference approach noise path.</i> The distance from station N to the reference aeroplane position S_r .
NT	metres	<i>Measured approach minimum distance.</i> The distance from station N to point T on the measured flight path.
NT_r	metres	<i>Reference approach minimum distance.</i> The distance from station N to point T_r on the corrected flight path.
ON	metres	<i>Approach measurement distance.</i> The distance from the runway threshold to the approach measurement station along the extended centre line of the runway.
OP	metres	<i>Approach flight track distance.</i> The distance from the runway threshold to the approach flight track position along the extended centre line of the runway for which the position of the aeroplane need no longer be recorded.

7. MATHEMATICAL FORMULATION OF NOY TABLES

Note 1.— The relationship between sound pressure level and perceived noisiness given in Table A1-1 is illustrated in Figure A1-3. The variation of SPL with $\log n$ for a given one-third octave band is expressed by either one or two straight lines depending upon the frequency range. Figure A1-3 a) illustrates the double line case for frequencies below 400 Hz and above 6 300 Hz and Figure A1-3 b) illustrates the single line case for all other frequencies.

The important aspects of the mathematical formulation are:

- a) the slopes of the straight lines $p(b)$ and $p(c)$;
- b) the intercepts of the lines on the SPL-axis, $SPL(b)$ and $SPL(c)$; and
- c) the coordinates of the discontinuity, $SPL(a)$ and $\log n(a)$.

Note 2.— Mathematically the relationship is expressed as follows:

Case 1: Figure A1-3 a): $f < 400$ Hz
 $f > 6\,300$ Hz

$$SPL(a) = \frac{p(c) SPL(b) - p(b) SPL(c)}{p(c) - p(b)}$$

$$\log n(a) = \frac{SPL(c) - SPL(b)}{p(b) - p(c)}$$

- a) $SPL < SPL(a)$

$$n = \text{antilog} \frac{SPL - SPL(b)}{p(b)}$$

- b) $SPL \geq SPL(a)$

$$n = \text{antilog} \frac{SPL - SPL(c)}{p(c)}$$

- c) $\log n < \log n(a)$

$$SPL = p(b) \log n + SPL(b)$$

- d) $\log n \geq \log n(a)$

$$SPL = p(c) \log n + SPL(c)$$

Case 2: Figure A1-3 b): $400 \leq f \leq 6\,300$ Hz

$$n = \text{antilog} \frac{SPL - SPL(c)}{p(c)}$$

$$\text{SPL} = p(c) \log n + \text{SPL}(c)$$

Note 3.— If the reciprocals of the slopes are defined as:

$$M(b) = 1/p(b)$$

$$M(c) = 1/p(c)$$

the equations in Note 2 can be written,

Case 1: Figure A1-3 a): $f < 400$ Hz
 $f > 6\,300$ Hz

$$\text{SPL}(a) = \frac{M(b) \text{SPL}(b) - M(c) \text{SPL}(c)}{M(b) - M(c)}$$

$$\log n(a) = \frac{M(b) M(c) [\text{SPL}(c) - \text{SPL}(b)]}{M(c) - M(b)}$$

a) $\text{SPL} < \text{SPL}(a)$

$$n = \text{antilog } M(b) [\text{SPL} - \text{SPL}(b)]$$

b) $\text{SPL} \geq \text{SPL}(a)$

$$n = \text{antilog } M(c) [\text{SPL} - \text{SPL}(c)]$$

c) $\log n < \log n(a)$

$$\text{SPL} = \frac{\log n}{M(b)} + \text{SPL}(b)$$

d) $\log n \geq \log n(a)$

$$\text{SPL} = \frac{\log n}{M(c)} + \text{SPL}(c)$$

Case 2: Figure A1-3 b): $400 \leq f \leq 6\,300$ Hz

$$n = \text{antilog } M(c) [\text{SPL} - \text{SPL}(c)]$$

$$\text{SPL} = \frac{\log n}{M(c)} + \text{SPL}(c)$$

Note 4.— Table A1-4 lists the values of the important constants necessary to calculate sound pressure level as a function of perceived noisiness.

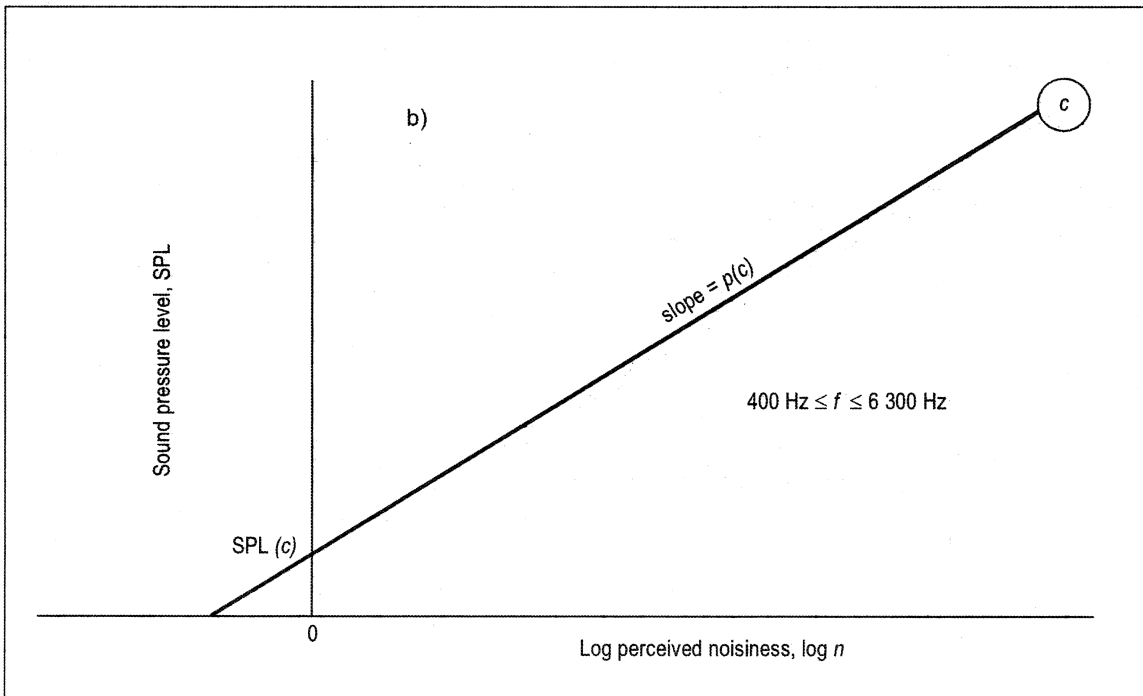
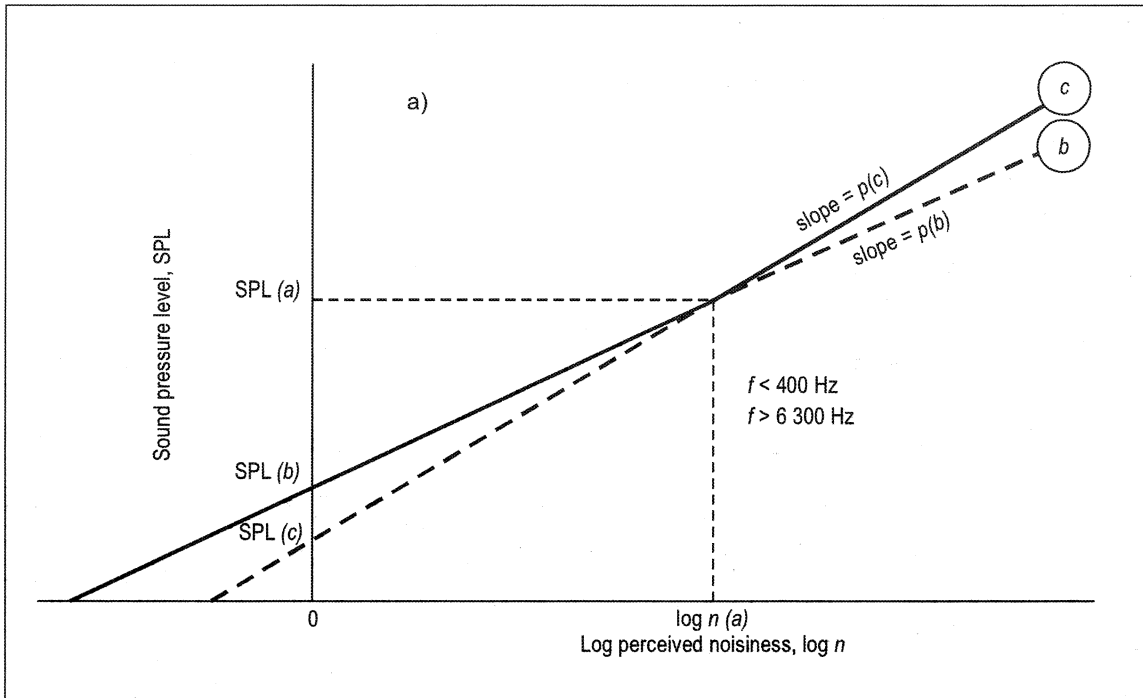


Figure A1-3. Sound pressure level as a function of perceived noisiness

Table A1-4. Constants for mathematically formulated noy values

Band (i)	f Hz	M(b)	SPL (b) dB	SPL (a) dB	M(c)	SPL (c) dB	
1	50	0.043478	64	91.0	0.030103	52	
2	63	0.040570	60	85.9	↑	51	
3	80	0.036831	56	87.3		49	
4	100	"	53	79.9		47	
5	125	0.035336	51	79.8		46	
6	160	0.033333	48	76.0		45	
7	200	"	46	74.0		43	
8	250	0.032051	44	74.9		42	
9	315	0.030675	42	94.6		41	
10	400	—	—	—		↓	40
11	500	—	—	—	40		
12	630	—	—	—	40		
13	800	—	—	—	40		
14	1 000	—	—	—	40		
15	1 250	—	—	—	0.030103		38
16	1 600	—	—	—	0.029960		34
17	2 000	—	—	—	↑		32
18	2 500	—	—	—			30
19	3 150	—	—	—			29
20	4 000	—	—	—			29
21	5 000	—	—	—			30
22	6 300	—	—	—		31	
23	8 000	0.042285	37	44.3	↓	34	
24	10 000	0.042285	41	50.7		0.029960	37

NOT APPLICABLE

8. SOUND ATTENUATION IN AIR

8.1 The atmospheric attenuation of sound shall be determined in accordance with the procedure presented below.

8.2 The relationship between sound attenuation, frequency, temperature and humidity is expressed by the following equations:

$$\alpha(i) = 10^{[2.05 \log(f_o/1000) + 1.1394 \times 10^{-3}\theta - 1.916984]} + \eta(\delta) \times 10^{[\log(f_o) + 8.42994 \times 10^{-3}\theta - 2.755624]}$$

$$\delta = \sqrt{\frac{1010}{f_o}} 10^{(\log H - 1.328924 + 3.179768 \times 10^{-2}\theta)} \times 10^{(-2.173716 \times 10^{-4}\theta^2 + 1.7496 \times 10^{-6}\theta^3)}$$

where:

$\eta(\delta)$ is given by Table A1-5 and f_o by Table A1-6;

$\alpha(i)$ being the attenuation coefficient in dB/100 m;

θ being the temperature in °C; and

H being the relative humidity.

8.3 The equations given in 8.2 are convenient for calculation by means of a computer. For use in other cases, numerical values determined from the equations are given in Tables A1-7 to A1-16.

Table A1-5

δ	η	δ	η
0.00	0.000	2.30	0.495
0.25	0.315	2.50	0.450
0.50	0.700	2.80	0.400
0.60	0.840	3.00	0.370
0.70	0.930	3.30	0.330
0.80	0.975	3.60	0.300
0.90	0.996	4.15	0.260
1.00	1.000	4.45	0.245
1.10	0.970	4.80	0.230
1.20	0.900	5.25	0.220
1.30	0.840	5.70	0.210
1.50	0.750	6.05	0.205
1.70	0.670	6.50	0.200
2.00	0.570	7.00	0.200
		10.00	0.200

Table A1-6

<i>one-third octave centre frequency</i>	f_o (Hz)	<i>one-third octave centre frequency</i>	f_o (Hz)
50	50	800	800
63	63	1 000	1 000
80	80	1 250	1 250
100	100	1 600	1 600
125	125	2 000	2 000
160	160	2 500	2 500
200	200	3 150	3 150
250	250	4 000	4 000
315	315	5 000	4 500
400	400	6 300	5 600
500	500	8 000	7 100
630	630	10 000	9 000

Table A1-7. Sound attenuation coefficient in db/100 m

Band centre frequency	Relative humidity = 10%										
	Temperature, °C										
	-10	-5	0	5	10	15	20	25	30	35	40
50	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
63	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.1	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.1	0.1	0.1
100	0.1	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
125	0.2	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
160	0.2	0.2	0.3	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1
200	0.2	0.3	0.3	0.3	0.2	0.2	0.1	0.1	0.1	0.1	0.2
250	0.2	0.4	0.4	0.4	0.3	0.3	0.2	0.2	0.2	0.2	0.2
315	0.2	0.4	0.5	0.6	0.5	0.4	0.3	0.2	0.2	0.2	0.2
400	0.3	0.5	0.7	0.8	0.6	0.5	0.4	0.3	0.3	0.3	0.3
500	0.3	0.5	0.8	1.0	0.9	0.7	0.6	0.5	0.4	0.4	0.4
630	0.3	0.6	0.9	1.2	1.2	1.0	0.9	0.7	0.6	0.5	0.5
800	0.4	0.6	1.0	1.5	1.7	1.5	1.2	1.0	0.8	0.7	0.6
1 000	0.4	0.7	1.2	1.8	2.1	2.0	1.7	1.4	1.2	1.0	0.9
1 250	0.4	0.8	1.3	2.1	2.6	2.8	2.4	2.0	1.7	1.4	1.2
1 600	0.5	0.9	1.4	2.3	3.3	3.8	3.4	2.9	2.4	2.0	1.7
2 000	0.6	1.0	1.6	2.6	3.9	4.7	4.7	4.1	3.4	2.8	2.3
2 500	0.7	1.1	1.8	2.9	4.5	5.8	6.4	5.6	4.8	4.0	3.3
3 150	0.8	1.2	2.0	3.2	5.1	7.1	8.3	7.7	6.8	5.7	4.8
4 000	0.9	1.4	2.3	3.6	5.7	8.5	10.5	11.0	9.6	8.3	6.9
5 000	1.0	1.6	2.4	3.8	6.1	9.2	11.7	12.8	11.3	9.9	8.3
6 300	1.3	1.9	2.8	4.3	6.8	10.4	14.2	16.4	15.5	13.7	11.7
8 000	1.6	2.3	3.4	5.0	7.7	11.8	17.0	20.8	22.0	19.4	16.8
10 000	2.1	2.9	4.1	6.0	8.9	13.4	19.9	25.9	29.5	27.2	24.1
12 500	2.9	3.7	5.0	7.1	10.3	15.3	22.7	31.2	36.9	37.6	33.4

Table A1-8. Sound attenuation coefficient in db/100 m

Band centre frequency	Relative humidity = 20%										
	Temperature, °C										
	-10	-5	0	5	10	15	20	25	30	35	40
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
63	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1
100	0.1	0.1	0.1	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1
125	0.2	0.1	0.1	0.1	0.0	0.1	0.1	0.1	0.1	0.1	0.1
160	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
200	0.3	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2
250	0.4	0.3	0.3	0.2	0.2	0.1	0.1	0.1	0.2	0.2	0.2
315	0.4	0.5	0.4	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2
400	0.5	0.6	0.5	0.4	0.3	0.3	0.2	0.2	0.3	0.3	0.3
500	0.6	0.8	0.7	0.6	0.5	0.4	0.3	0.3	0.3	0.3	0.4
630	0.7	1.0	1.0	0.8	0.7	0.5	0.4	0.4	0.4	0.4	0.5
800	0.8	1.2	1.4	1.2	0.9	0.7	0.6	0.5	0.5	0.6	0.6
1 000	0.9	1.4	1.8	1.6	1.3	1.0	0.8	0.7	0.7	0.7	0.8
1 250	0.9	1.6	2.2	2.2	1.8	1.5	1.2	1.0	0.9	0.9	1.0
1 600	1.1	1.9	2.7	3.1	2.6	2.1	1.7	1.4	1.2	1.2	1.3
2 000	1.2	2.0	3.2	3.9	3.6	3.0	2.5	2.0	1.7	1.5	1.6
2 500	1.3	2.3	3.7	4.9	5.0	4.2	3.5	2.8	2.3	2.0	2.0
3 150	1.5	2.5	4.2	6.0	6.8	5.8	4.9	4.0	3.3	2.8	2.7
4 000	1.7	2.9	4.8	7.2	8.7	8.2	7.1	5.9	4.9	4.0	3.6
5 000	1.9	3.1	5.1	7.9	9.8	9.7	8.4	7.0	5.9	4.8	4.2
6 300	2.2	3.5	5.7	9.0	12.0	13.3	11.5	9.9	8.2	6.8	5.8
8 000	2.7	4.1	6.5	10.4	14.8	17.4	16.2	14.1	12.0	10.0	8.3
10 000	3.3	4.9	7.5	11.8	17.7	22.0	23.1	20.1	17.2	14.5	12.1
12 500	4.1	5.9	8.8	13.4	20.5	27.1	30.6	27.5	24.2	20.6	17.4

Table A1-9. Sound attenuation coefficient in db/100 m

Band centre frequency	Relative humidity = 30%											
	Temperature, °C											
	Hz	-10	-5	0	5	10	15	20	25	30	35	40
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
63	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1
100	0.1	0.1	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1
125	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
160	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
200	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2
250	0.3	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2
315	0.4	0.3	0.2	0.2	0.2	0.1	0.2	0.2	0.2	0.2	0.2	0.2
400	0.6	0.5	0.4	0.3	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
500	0.7	0.6	0.5	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.4
630	0.9	0.9	0.7	0.5	0.4	0.3	0.3	0.4	0.4	0.4	0.4	0.5
800	1.1	1.3	1.0	0.8	0.6	0.5	0.4	0.5	0.5	0.6	0.6	0.6
1 000	1.3	1.6	1.4	1.1	0.9	0.7	0.6	0.6	0.6	0.7	0.8	0.8
1 250	1.5	2.0	1.9	1.6	1.2	0.9	0.8	0.7	0.8	0.9	1.0	1.0
1 600	1.7	2.5	2.7	2.2	1.8	1.4	1.1	1.0	1.0	1.1	1.3	1.3
2 000	1.9	3.0	3.6	3.1	2.5	2.0	1.6	1.4	1.3	1.4	1.6	1.6
2 500	2.1	3.5	4.4	4.2	3.5	2.8	2.2	1.9	1.7	1.8	2.0	2.0
3 150	2.3	4.0	5.5	5.9	4.9	4.0	3.3	2.6	2.3	2.3	2.5	2.5
4 000	2.6	4.5	6.8	7.9	6.9	5.8	4.7	3.8	3.3	3.1	3.3	3.3
5 000	2.8	4.8	7.4	9.0	8.2	6.9	5.7	4.6	3.9	3.6	3.7	3.7
6 300	3.2	5.3	8.6	11.1	11.3	9.6	8.0	6.6	5.4	4.8	4.7	4.7
8 000	3.8	6.1	9.9	13.9	15.6	13.6	11.5	9.5	7.9	6.8	6.4	6.4
10 000	4.5	7.1	11.4	16.9	20.3	19.1	16.6	13.9	11.6	9.7	8.8	8.8
12 500	5.5	8.3	13.0	20.0	25.3	26.6	23.0	19.6	16.4	13.8	12.1	12.1

Table A1-10. Sound attenuation coefficient in db/100 m

Band centre frequency	Relative humidity = 40%											
	Temperature, °C											
	Hz	-10	-5	0	5	10	15	20	25	30	35	40
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
63	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1
100	0.1	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1
125	0.1	0.1	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
160	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
200	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2
250	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.2
315	0.3	0.2	0.2	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2	0.2
400	0.5	0.4	0.3	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3
500	0.6	0.5	0.4	0.3	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.4
630	0.9	0.7	0.5	0.4	0.3	0.3	0.3	0.4	0.4	0.4	0.4	0.5
800	1.2	1.0	0.8	0.6	0.4	0.4	0.4	0.5	0.5	0.6	0.6	0.6
1 000	1.4	1.4	1.1	0.8	0.6	0.5	0.5	0.6	0.6	0.7	0.8	0.8
1 250	1.8	1.9	1.5	1.2	0.9	0.7	0.7	0.7	0.8	0.9	1.0	1.0
1 600	2.1	2.6	2.1	1.7	1.3	1.0	0.9	0.9	1.0	1.1	1.3	1.3
2 000	2.5	3.2	2.9	2.4	1.9	1.5	1.2	1.2	1.3	1.4	1.6	1.6
2 500	2.8	4.0	4.1	3.3	2.6	2.1	1.7	1.6	1.7	1.8	2.0	2.0
3 150	3.2	4.9	5.6	4.7	3.8	3.0	2.4	2.1	2.1	2.3	2.5	2.5
4 000	3.6	5.9	7.2	6.5	5.4	4.3	3.5	3.0	2.8	3.0	3.3	3.3
5 000	3.8	6.3	8.1	7.7	6.5	5.2	4.2	3.5	3.3	3.4	3.7	3.7
6 300	4.3	7.2	10.0	10.7	9.0	7.3	6.0	4.9	4.4	4.3	4.7	4.7
8 000	5.0	8.3	12.3	14.4	12.6	10.6	8.7	7.1	6.1	5.8	6.2	6.2
10 000	5.8	9.5	14.8	18.4	17.8	15.2	12.7	10.5	8.8	8.1	8.1	8.1
12 500	6.9	10.9	17.2	22.9	24.7	21.2	17.8	14.9	12.4	10.9	10.6	10.6

Table A1-11. Sound attenuation coefficient in db/100 m

Band centre frequency	Relative humidity = 50%											
	Temperature, °C											
	–10	–5	0	5	10	15	20	25	30	35	40	
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
63	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1
100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1
125	0.1	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
160	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
200	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2
250	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2
315	0.3	0.2	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2
400	0.4	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3
500	0.5	0.4	0.3	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.4
630	0.7	0.6	0.4	0.3	0.3	0.3	0.3	0.4	0.4	0.4	0.4	0.5
800	1.0	0.8	0.6	0.5	0.4	0.4	0.4	0.5	0.5	0.6	0.6	0.6
1 000	1.4	1.1	0.9	0.6	0.5	0.5	0.5	0.6	0.6	0.7	0.7	0.8
1 250	1.8	1.6	1.2	0.9	0.7	0.6	0.7	0.7	0.8	0.9	0.9	1.0
1 600	2.3	2.2	1.8	1.3	1.0	0.9	0.9	0.9	1.0	1.1	1.1	1.3
2 000	2.8	3.1	2.4	1.9	1.5	1.2	1.1	1.2	1.3	1.4	1.4	1.6
2 500	3.4	4.0	3.4	2.7	2.1	1.6	1.5	1.5	1.7	1.8	1.8	2.0
3 150	4.0	5.1	4.7	3.8	3.0	2.3	2.0	1.9	2.1	2.3	2.3	2.5
4 000	4.6	6.4	6.7	5.5	4.4	3.4	2.8	2.6	2.7	3.0	3.0	3.3
5 000	4.9	7.2	7.9	6.5	5.2	4.2	3.4	3.1	3.1	3.4	3.4	3.7
6 300	5.4	8.6	10.2	8.9	7.3	5.9	4.7	4.1	4.0	4.3	4.3	4.7
8 000	6.2	10.2	13.1	12.5	10.5	8.6	6.9	5.8	5.4	5.7	5.7	6.2
10 000	7.2	11.9	16.4	17.8	15.0	12.4	10.2	8.4	7.5	7.4	7.4	8.1
12 500	8.4	13.6	20.1	23.4	20.6	17.5	14.4	11.9	10.4	9.9	9.9	10.5

Table A1-12. Sound attenuation coefficient in db/100 m

Band centre frequency	Relative humidity = 60%											
	Temperature, °C											
	–10	–5	0	5	10	15	20	25	30	35	40	
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
63	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1
100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1
125	0.1	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
160	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
200	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2
250	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2
315	0.2	0.2	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2	0.2
400	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3
500	0.5	0.3	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.4
630	0.6	0.5	0.3	0.3	0.3	0.3	0.3	0.4	0.4	0.4	0.4	0.5
800	0.9	0.7	0.5	0.4	0.4	0.4	0.4	0.5	0.5	0.6	0.6	0.6
1 000	1.2	1.0	0.7	0.5	0.5	0.5	0.5	0.6	0.6	0.7	0.7	0.8
1 250	1.7	1.3	1.0	0.7	0.6	0.6	0.7	0.7	0.8	0.9	0.9	1.0
1 600	2.3	1.9	1.5	1.1	0.9	0.8	0.9	0.9	1.0	1.1	1.1	1.3
2 000	2.9	2.6	2.1	1.6	1.2	1.1	1.1	1.2	1.3	1.4	1.4	1.6
2 500	3.6	3.6	2.9	2.2	1.7	1.4	1.4	1.5	1.7	1.8	1.8	2.0
3 150	4.4	5.0	4.1	3.2	2.5	2.0	1.8	1.9	2.1	2.3	2.3	2.5
4 000	5.3	6.6	5.7	4.6	3.6	2.8	2.5	2.5	2.7	3.0	3.0	3.3
5 000	5.8	7.4	6.8	5.5	4.3	3.4	2.9	2.9	3.1	3.4	3.4	3.7
6 300	6.6	9.2	9.3	7.7	6.1	4.9	4.0	3.8	4.0	4.3	4.3	4.7
8 000	7.6	11.4	13.0	10.9	8.9	7.2	5.8	5.2	5.2	5.7	5.7	6.2
10 000	8.7	13.8	16.9	15.3	12.8	10.4	8.5	7.3	7.0	7.4	7.4	8.1
12 500	10.0	16.1	21.1	21.2	18.0	14.8	12.2	10.2	9.5	9.6	9.6	10.5

Table A1-13. Sound attenuation coefficient in db/100 m

Band centre frequency	Relative humidity = 70%											
	Temperature, °C											
	Hz	-10	-5	0	5	10	15	20	25	30	35	40
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
63	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1
100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1
125	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
160	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
200	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.1	0.1	0.1	0.2
250	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.1	0.2	0.2	0.2
315	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2
400	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3
500	0.4	0.3	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.4	0.4
630	0.6	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.4	0.4	0.4	0.5
800	0.8	0.6	0.4	0.4	0.4	0.4	0.4	0.4	0.5	0.5	0.6	0.6
1 000	1.1	0.8	0.6	0.5	0.4	0.5	0.5	0.5	0.6	0.7	0.7	0.8
1 250	1.5	1.1	0.9	0.7	0.6	0.6	0.7	0.7	0.7	0.8	0.9	1.0
1 600	2.1	1.7	1.2	0.9	0.8	0.8	0.9	1.0	1.0	1.1	1.3	1.3
2 000	2.9	2.3	1.8	1.3	1.0	1.0	1.1	1.2	1.2	1.3	1.4	1.6
2 500	3.7	3.2	2.5	1.9	1.5	1.3	1.4	1.5	1.5	1.7	1.8	2.0
3 150	4.6	4.4	3.5	2.7	2.1	1.8	1.8	1.9	2.1	2.1	2.3	2.5
4 000	5.7	6.3	5.1	4.0	3.1	2.5	2.3	2.5	2.7	2.7	3.0	3.3
5 000	6.3	7.3	6.0	4.7	3.7	3.0	2.7	2.9	2.9	3.1	3.4	3.7
6 300	7.5	9.3	8.2	6.6	5.2	4.2	3.6	3.6	3.6	4.0	4.3	4.7
8 000	8.8	11.8	11.6	9.5	7.6	6.1	5.1	4.9	4.9	5.2	5.7	6.2
10 000	10.2	14.8	16.4	13.7	11.1	9.0	7.4	6.8	6.8	6.8	7.4	8.1
12 500	11.6	18.0	21.4	18.8	15.7	12.8	10.5	9.2	9.0	9.0	9.6	10.5

Table A1-14. Sound attenuation coefficient in db/100 m

Band centre frequency	Relative humidity = 80%											
	Temperature, °C											
	Hz	-10	-5	0	5	10	15	20	25	30	35	40
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
63	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1
100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1
125	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
160	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
200	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2
250	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2
315	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2
400	0.2	0.2	0.1	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3
500	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.4
630	0.5	0.3	0.3	0.2	0.3	0.3	0.3	0.3	0.4	0.4	0.4	0.5
800	0.7	0.5	0.4	0.3	0.3	0.4	0.4	0.4	0.5	0.5	0.6	0.6
1 000	1.0	0.7	0.5	0.4	0.4	0.5	0.5	0.5	0.6	0.6	0.7	0.8
1 250	1.3	1.0	0.7	0.6	0.6	0.6	0.6	0.7	0.7	0.8	0.9	1.0
1 600	1.9	1.5	1.1	0.8	0.7	0.8	0.9	0.9	0.9	1.0	1.1	1.3
2 000	2.6	2.0	1.5	1.1	1.0	1.0	1.1	1.2	1.3	1.3	1.4	1.6
2 500	3.6	2.9	2.2	1.6	1.3	1.3	1.4	1.5	1.7	1.7	1.8	2.0
3 150	4.7	4.0	3.1	2.4	1.9	1.7	1.8	1.9	2.1	2.1	2.3	2.5
4 000	5.9	5.6	4.5	3.4	2.7	2.3	2.3	2.5	2.7	2.7	3.0	3.3
5 000	6.6	6.6	5.3	4.1	3.2	2.7	2.6	2.8	3.1	3.1	3.4	3.7
6 300	8.1	9.1	7.4	5.9	4.6	3.7	3.4	3.6	4.0	4.0	4.3	4.7
8 000	9.8	12.0	10.4	8.4	6.7	5.4	4.8	4.8	5.2	5.2	5.7	6.2
10 000	11.5	15.3	14.8	12.2	9.8	7.8	6.7	6.4	6.8	6.8	7.4	8.1
12 500	13.3	18.9	20.5	17.0	13.9	11.3	9.4	8.7	8.9	8.9	9.6	10.5

Table A1-15. Sound attenuation coefficient in db/100 m

Band centre frequency	Relative humidity = 90%											
	Temperature, °C											
	-10	-5	0	5	10	15	20	25	30	35	40	
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
63	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1
100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1
125	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1
160	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
200	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2
250	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2
315	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2
400	0.2	0.2	0.1	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3
500	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.4
630	0.4	0.3	0.2	0.2	0.3	0.3	0.3	0.4	0.4	0.4	0.4	0.5
800	0.6	0.4	0.3	0.3	0.3	0.4	0.4	0.5	0.5	0.6	0.6	0.6
1 000	0.9	0.6	0.5	0.4	0.4	0.5	0.5	0.6	0.6	0.7	0.7	0.8
1 250	1.2	0.9	0.6	0.5	0.6	0.6	0.7	0.7	0.8	0.9	0.9	1.0
1 600	1.7	1.3	0.9	0.7	0.7	0.8	0.9	0.9	1.0	1.1	1.1	1.3
2 000	2.4	1.8	1.3	1.0	0.9	1.0	1.1	1.2	1.3	1.4	1.4	1.6
2 500	3.3	2.6	1.9	1.4	1.2	1.3	1.4	1.5	1.7	1.8	1.8	2.0
3 150	4.6	3.6	2.8	2.1	1.7	1.6	1.8	1.9	2.1	2.3	2.3	2.5
4 000	6.0	5.1	4.0	3.0	2.4	2.2	2.3	2.5	2.7	3.0	3.0	3.3
5 000	6.7	6.0	4.8	3.7	2.9	2.6	2.6	2.8	3.1	3.4	3.4	3.7
6 300	8.3	8.3	6.7	5.2	4.0	3.4	3.3	3.6	4.0	4.3	4.3	4.7
8 000	10.4	11.7	9.5	7.6	6.0	4.9	4.5	4.8	5.2	5.7	5.7	6.2
10 000	12.6	15.4	13.5	11.0	8.8	7.1	6.3	6.3	6.8	7.4	7.4	8.1
12 500	14.8	19.4	18.6	15.4	12.4	10.1	8.7	8.3	8.9	9.6	9.6	10.5

Table A1-16. Sound attenuation coefficient in db/100 m

Band centre frequency	Relative humidity = 100%											
	Temperature, °C											
	-10	-5	0	5	10	15	20	25	30	35	40	
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
63	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1
100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1
125	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
160	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
200	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2
250	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2
315	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2
400	0.2	0.1	0.1	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3
500	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.4
630	0.4	0.3	0.2	0.2	0.3	0.3	0.3	0.4	0.4	0.4	0.4	0.5
800	0.6	0.4	0.3	0.3	0.3	0.4	0.4	0.5	0.5	0.6	0.6	0.6
1 000	0.8	0.6	0.4	0.4	0.4	0.5	0.5	0.6	0.6	0.7	0.7	0.8
1 250	1.1	0.8	0.6	0.5	0.6	0.6	0.7	0.7	0.8	0.9	0.9	1.0
1 600	1.6	1.2	0.8	0.7	0.7	0.8	0.9	0.9	1.0	1.1	1.1	1.3
2 000	2.2	1.6	1.2	0.9	0.9	1.0	1.1	1.2	1.3	1.4	1.4	1.6
2 500	3.0	2.3	1.7	1.3	1.2	1.3	1.4	1.5	1.7	1.8	1.8	2.0
3 150	4.2	3.3	2.5	1.9	1.6	1.6	1.8	1.9	2.1	2.3	2.3	2.5
4 000	5.9	4.7	3.6	2.7	2.2	2.1	2.3	2.5	2.7	3.0	3.0	3.3
5 000	6.8	5.6	4.3	3.3	2.6	2.4	2.6	2.8	3.1	3.4	3.4	3.7
6 300	8.5	7.6	6.0	4.7	3.7	3.3	3.3	3.6	4.0	4.3	4.3	4.7
8 000	10.7	10.8	8.7	6.8	5.3	4.5	4.4	4.8	5.2	5.7	5.7	6.2
10 000	13.3	15.1	12.5	10.0	7.9	6.5	6.0	6.3	6.8	7.4	7.4	8.1
12 500	16.0	19.5	17.2	14.0	11.3	9.2	8.2	8.2	8.9	9.6	9.6	10.5

9. DETAILED CORRECTION PROCEDURES

9.1 Introduction

9.1.1 When the noise certification test conditions are not identical to the noise certification reference conditions, appropriate corrections shall be made to the EPNL calculated from the measured data by the methods of this section.

Note 1.— Differences between reference and test conditions which lead to corrections can result from the following:

- a) atmospheric absorption of sound under test conditions different from reference;
- b) test flight path at altitude different from reference; and
- c) test mass different from maximum.

Note 2.— Negative correction can arise if the atmospheric absorption of sound under test conditions is less than reference and also if the test flight path is at a lower altitude than reference.

The take-off test flight path can occur at a higher altitude than reference if the meteorological conditions permit superior aeroplane performance (“cold day” effect). Conversely, the “hot day” effect can cause the take-off test flight path to occur at a lower altitude than reference. The approach test flight path can occur at either higher or lower altitudes than reference irrespective of the meteorological conditions.

9.1.2 The measured noise values shall be properly corrected to the reference conditions, either by the correction procedures presented as follows or by an integrated programme which shall be approved as being equivalent.

9.1.2.1 Correction procedures shall consist of one or more values added algebraically to the EPNL calculated as if the tests were conducted completely under the noise certification reference conditions.

9.1.2.2 The flight profiles shall be determined for both take-off and approach, and for both reference and test conditions. The test procedures shall require noise and flight path recordings with a synchronized time signal from which the test profile can be delineated, including the aeroplane position for which PNLTM is observed at the noise measuring station. For take-off, a flight profile corrected to reference conditions shall be derived from data approved by the certificating authority.

Note.— For approach, the reference profile is defined by the reference conditions in 5.3.

9.1.2.3 The differing noise path lengths from the aeroplane to the noise measuring station corresponding to PNLTM shall be determined for the test and reference conditions. The SPL values in the spectrum of PNLTM shall then be corrected for the effects of:

- a) change in atmospheric sound absorption;
- b) atmospheric sound absorption on the change in noise path length; and
- c) inverse square law on the change in noise path length.

9.1.2.4 The corrected values of SPL shall then be converted to PNL from which PNLTM is subtracted.

Note.— The difference represents the correction to be added algebraically to the EPNL calculated from the measured data.

9.1.3 The minimum distances from both the test and reference profiles to the noise measuring station shall be calculated and used to determine a noise duration correction due to the change in the altitude of aeroplane flyover. The duration correction shall be added algebraically to the EPNL calculated from the measured data.

9.1.4 From manufacturer's data (approved by the certificating authority) in the form of curves, tables or in some other manner giving the variation of EPNL with take-off mass and also for landing mass, corrections shall be determined to be added to the EPNL calculated from the measured data to account for noise level changes due to differences between maximum take-off mass and landing mass and test aeroplane mass.

9.1.5 From manufacturer's data (approved by the certificating authority) in the form of curves, tables or in some other manner giving the variation of EPNL with approach angle, corrections shall be determined to be added algebraically to the EPNL calculated from measured data to account for noise level changes due to differences between the reference and the test approach angles.

9.2 Take-off profiles

Note.—

- a) *Figure A1-4 illustrates a typical take-off profile. The aeroplane begins the take-off roll at point A, lifts off at point B, and initiates the first constant climb at point C at an angle β . The noise abatement thrust cutback is started at point D and completed at point E where the second constant climb is defined by the angle γ (usually expressed in terms of the gradient in per cent).*
- b) *The end of the noise certification take-off flight path is represented by aeroplane position F whose vertical projection on the flight track (extended centre line of the runway) is point M. The position of the aeroplane is recorded for a distance AM of at least 11 km (6 NM).*
- c) *Position K is the take-off noise measuring station whose distance AK is the specified take-off measurement distance. Position L is the sideline noise measuring station located on a line parallel to and the specified distance from the runway centre line where the noise level during take-off is greatest.*
- d) *The thrust settings after thrust reduction, if used, under the test conditions are such as would produce at least the minimum certification gradient for the reference conditions of atmosphere and mass.*
- e) *The take-off profile is associated with the following five parameters: AB, the length of take-off roll; β , the first constant climb angle; γ , the second constant climb angle; and δ and ϵ , the thrust cutback angles. These five parameters are functions of the aeroplane performance, mass and atmospheric conditions (ambient air temperature, pressure, and wind velocity). If the test atmospheric conditions are not equal to the reference atmospheric conditions, the corresponding test and reference profile parameters will be different as shown in Figure A1-5. The profile parameter changes (identified as ΔAB , $\Delta\beta$, $\Delta\gamma$, $\Delta\delta$ and $\Delta\epsilon$) can be derived from the manufacturer's data (approved by the certificating authority) and are used to define the flight profile corrected to the atmospheric reference conditions, the aeroplane mass being unchanged from that of the test. The relationships between the measured and corrected take-off flight profiles can then be used to determine the corrections which are applied to the EPNL calculated from the measured data.*
- f) *Figure A1-6 illustrates portions of the measured and corrected take-off flight paths including the significant geometrical relationships influencing sound propagation. EF represents the second constant measured flight path with climb angle γ , and $E_c F_c$ represents the second constant corrected flight path at different altitude and with different climb angle $\gamma + \Delta\gamma$.*
- g) *Position Q represents the aeroplane location on the measured take-off flight path for which PNLTM is observed at the noise measuring station K, and Q_c is the corresponding position on the corrected flight path. The measured and*

corrected noise propagation paths are KQ and KQ_c , respectively, which are assumed to form the same angle θ with their flight paths. This assumption of constant angle θ is one which may not be valid in all cases. Future refinement shall be sought. However, for the present application of this test procedure, any differences are considered small.

- h) Position R represents the point on the measured take-off flight path nearest the noise measuring station K , and R_c is the corresponding position on the corrected flight path. The minimum distance to the measured and corrected flight paths are indicated by the lines KR and KR_c , respectively, which are normal to their flight paths.

If two peak values of PNL_T are observed during flyover which differ by less than 2 TPNdB that noise level which, when corrected to reference conditions, gives the greater value shall be used in the computation for EPNL at the reference conditions. In that case the point corresponding to the second peak shall be obtained on the corrected flight path by applying manufacturer's approved data.

9.3 Approach profiles

Note.—

- a) Figure A1-7 illustrates a typical approach profile. The beginning of the noise certification approach profile is represented by aeroplane position G whose vertical projection on the flight track (extended centre line of the runway) is point P . The position of the aeroplane is recorded for a distance OP from the runway threshold O of at least 7.4 km (4 NM).
- b) The aeroplane approaches at an angle η , passes vertically over the noise measuring station N at a height of NH , begins the level-off at position I , and touches down at position J .
- c) The approach profile is defined by the approach angle η and the height NH which are functions of the aeroplane operating conditions controlled by the pilot. If the measured approach profile parameters are different from the corresponding reference approach parameters (Figure A1-8), corrections are applied to the EPNL calculated from the measured data.
- d) Figure A1-9 illustrates portions of the measured and reference approach flight paths including the significant geometrical relationships influencing sound propagation. GI represents the measured approach path with approach angle η , and $G_r I_r$ represents the reference approach flight path at reference altitude and the reference approach angle η_r .
- e) Position S represents the aeroplane location on the measured approach flight path for which PNL_{TM} is observed at the noise measuring station N , and S_r is the corresponding position on the reference approach flight path. The measured and corrected noise propagation paths are NS and NS_r , respectively, which form the same angle λ with their flight paths.
- f) Position T represents the point on the measured approach flight path nearest the noise measuring station N , and T_r is the corresponding point on the reference approach flight path. The minimum distances to the measured and reference flight paths are indicated by the lines NT and NT_r , respectively, which are normal to their flight paths.

9.4 PNL_T corrections

9.4.1 Whenever the ambient atmospheric conditions of temperature and relative humidity differ from the reference conditions and/or whenever the measured take-off and approach flight paths differ from the reference flight paths respectively, corrections to the EPNL values calculated from the measured data shall be applied. These corrections shall be calculated as described below:

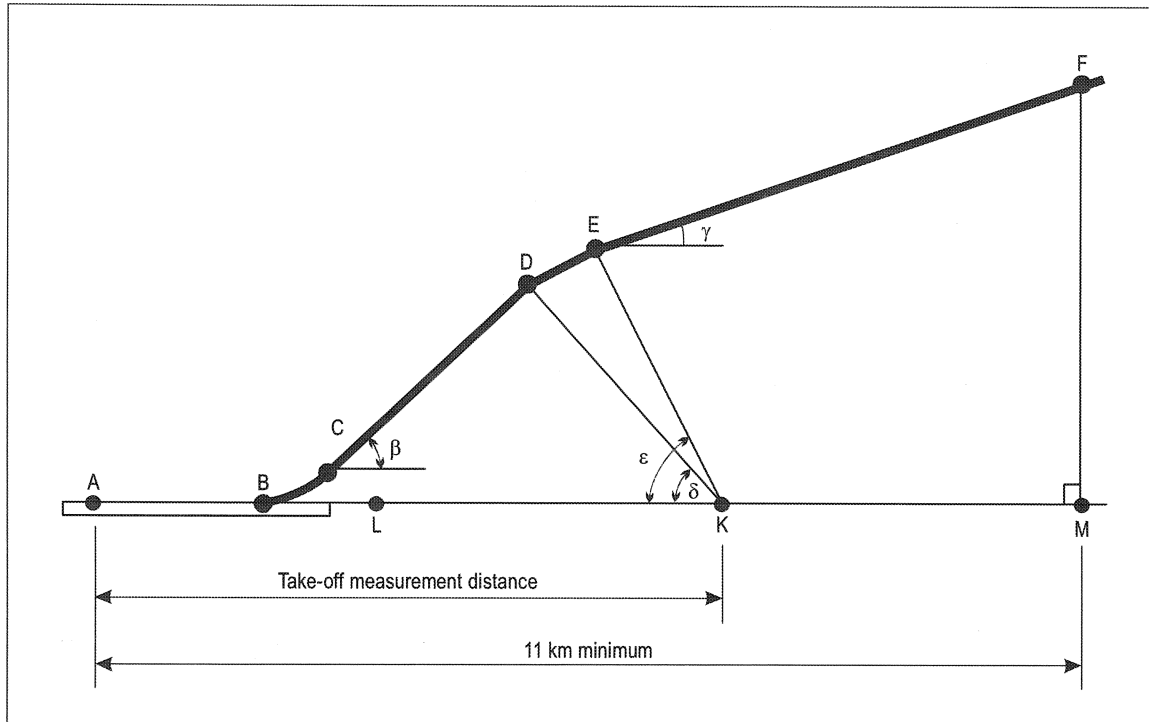


Figure A1-4. Measured take-off profile

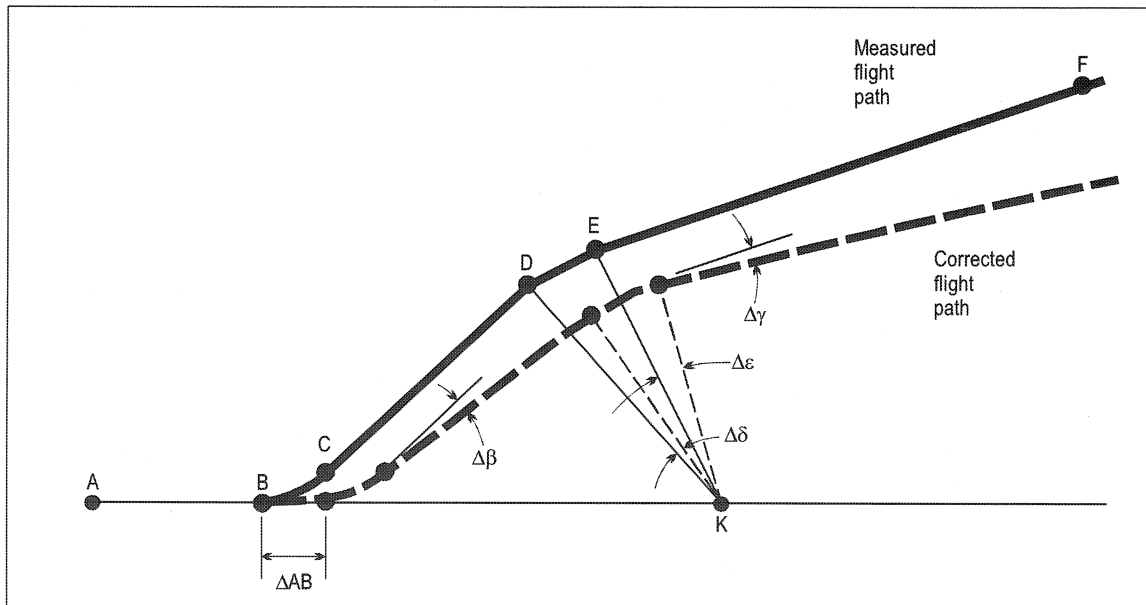


Figure A1-5. Comparison of measured and corrected take-off profiles

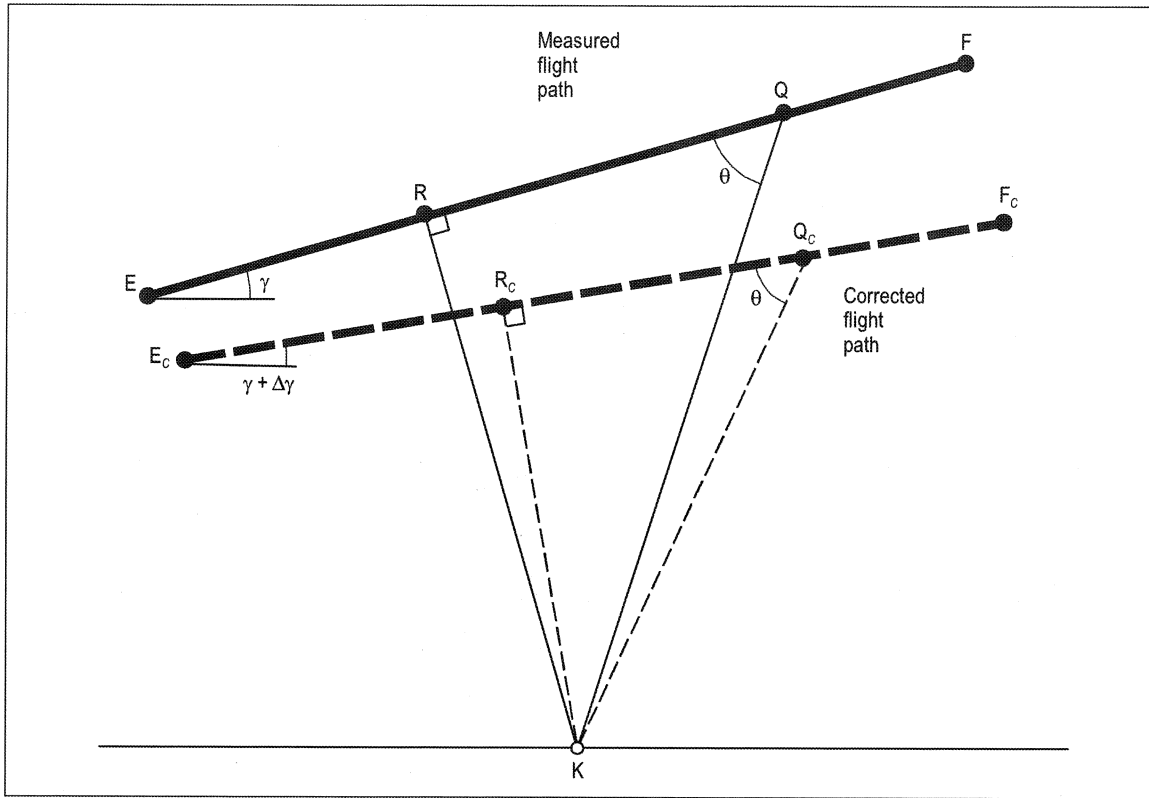


Figure A1-6. Take-off profile characteristics influencing sound level

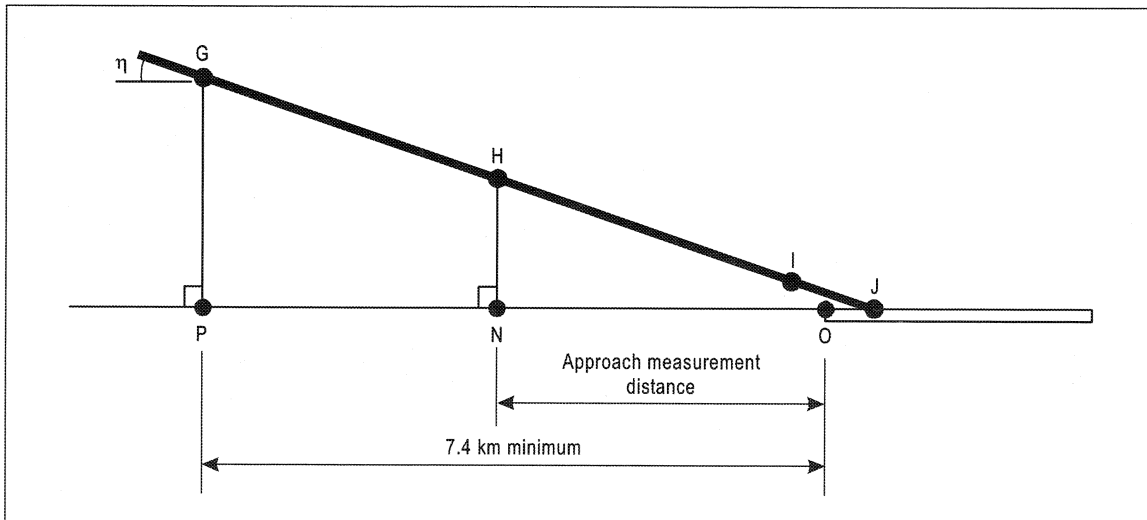


Figure A1-7. Measured approach profile

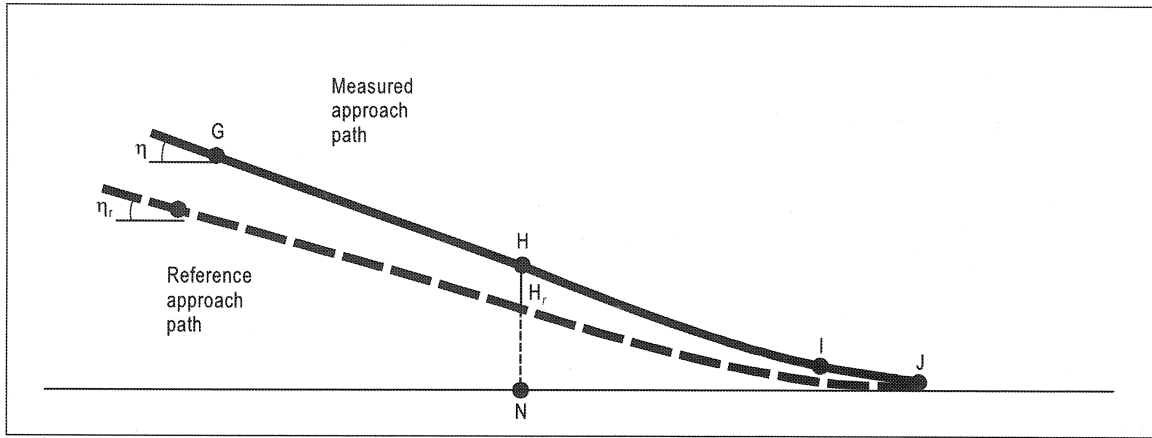


Figure A1-8. Comparison of measured and corrected approach profile

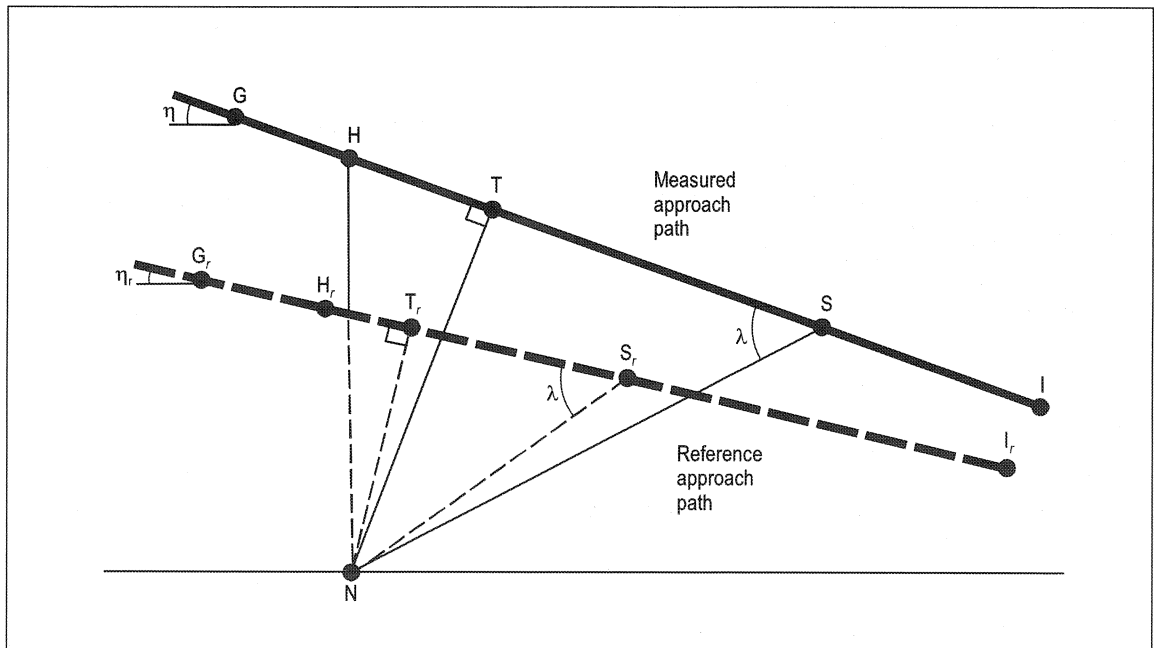


Figure A1-9. Approach profile characteristics influencing sound level

9.4.1.1 Take-off

9.4.1.1.1 Referring to a typical take-off flight path shown in Figure A1-6, the spectrum of PNLTM observed at station K, for the aeroplane at position Q, shall be decomposed into its individual $SPL(i)$ values. A set of corrected values shall be computed as follows:

$$SPL(i)_c = SPL(i) + 0.01[\alpha(i) - \alpha(i)_o] KQ + 0.01 \alpha(i)_o (KQ - KQ_c) + 20 \log (KQ/KQ_c)$$

- the term $0.01 [\alpha(i) - \alpha(i)_o] KQ$ accounts for the effects of the change in atmospheric sound absorption where $\alpha(i)$ and $\alpha(i)_o$ are the sound absorption coefficients for the test and reference conditions respectively for the i -th one-third octave band and KQ is the measured take-off noise path;
- the term $0.01 \alpha(i)_o (KQ - KQ_c)$ accounts for the effect of atmospheric sound absorption on the change in the noise path length, where KQ_c is the corrected take-off noise path; and
- the term $20 \log (KQ/KQ_c)$ accounts for the effects of the inverse square law on the change in the noise path length.

9.4.1.1.2 The corrected values of $SPL(i)_c$ shall then be converted to PNLT and a correction term calculated as follows:

$$\Delta_1 = PNLT - PNLTM$$

which represents the correction to be added algebraically to the EPNL calculated from the measured data.

9.4.1.2 Approach

The same procedure shall be used for the approach flight path except that the values for $SPL(i)_c$ relate to the approach noise paths shown in Figure A1-9 as follows:

$$SPL(i)_c = SPL(i) + 0.01 [\alpha(i) - \alpha(i)_o] NS + 0.01 \alpha(i)_o (NS - NS_r) + 20 \log (NS/NS_r)$$

where NS and NS_r are the measured and reference approach noise paths, respectively. The remainder of the procedure shall be the same as for the take-off flight path.

9.4.1.3 Lateral

The same procedure shall be used for the lateral flight path except that the values for $SPL(i)_c$ relate only to the measured lateral noise path as follows:

$$SPL(i)_c = SPL(i) + 0.01 [\alpha(i) - \alpha(i)_o] LX$$

where LX shall be the measured lateral noise path from station L (Figure A1-4) to position X of the aeroplane for which PNLTM is observed at station L. Only the correction term accounting for the effects of change in atmospheric sound absorption shall be considered. The difference between the measured and corrected noise path lengths shall be assumed negligible for the lateral flight path. The remainder of the procedure shall be the same as for the take-off flight path.

9.5 Duration correction

9.5.1 Whenever the measured take-off and approach flight paths differ from the corrected and reference flight paths, respectively, duration corrections to the EPNL values calculated from the measured data shall be applied. These corrections shall be calculated as described below:

9.5.1.1 Take-off

Referring to the take-off flight path shown in Figure A1-6, a correction term shall be calculated as follows:

$$\Delta_2 = -7.5 \log (KR/KR_c)$$

which represents the corrections to be added algebraically to the EPNL calculated from the measured data. The lengths KR and KR_c shall be the measured and corrected take-off minimum distances, respectively, from the noise measuring station K to the measured and corrected flight paths. The negative sign shall indicate that, for the particular case of a duration correction, the EPNL calculated from the measured data shall be reduced if the measured flight path is at a greater altitude than the corrected flight path.

9.5.1.2 Approach

The same procedure shall be used for the approach flight path except that the correction relates to the approach minimum distances shown in Figure A1-9 as follows:

$$\Delta_2 = -7.5 \log (NT/NT_r)$$

where NT is the measured approach minimum distance from the noise measuring station N to the measured flight path.

9.5.1.3 Lateral

No duration correction shall be computed for the lateral flight path because the differences between the measured and corrected flight paths are assumed negligible.

9.6 Mass correction

Whenever the aeroplane mass, during either the noise certification take-off or approach test, is different from the corresponding maximum take-off or landing mass, a correction shall be applied to the EPNL value calculated from the measured data. The corrections shall be determined from the manufacturer's data (approved by the certificating authority) in the form of tables or curves such as schematically indicated in Figures A1-10 and A1-11. The manufacturer's data shall be applicable to the noise certification reference atmospheric conditions.

9.7 Approach angle correction

Whenever the aeroplane approach angle during the noise certification approach test is different from the reference approach angle, a correction shall be applied to the EPNL value calculated from the measured data. The corrections shall be determined from the manufacturer's data (approved by the certificating authority) in the form of tables or curves such as schematically indicated in Figure A1-12. The manufacturer's data shall be applicable to the noise certification reference atmospheric conditions and to the test landing mass.

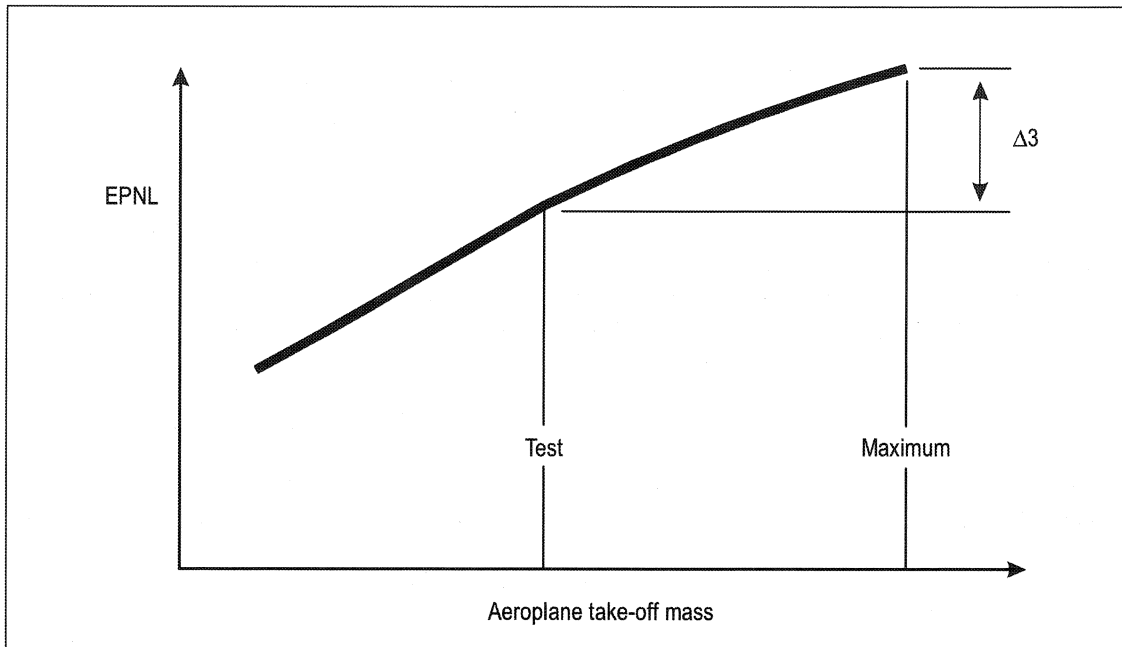


Figure A1-10. Take-off mass correction for EPNL

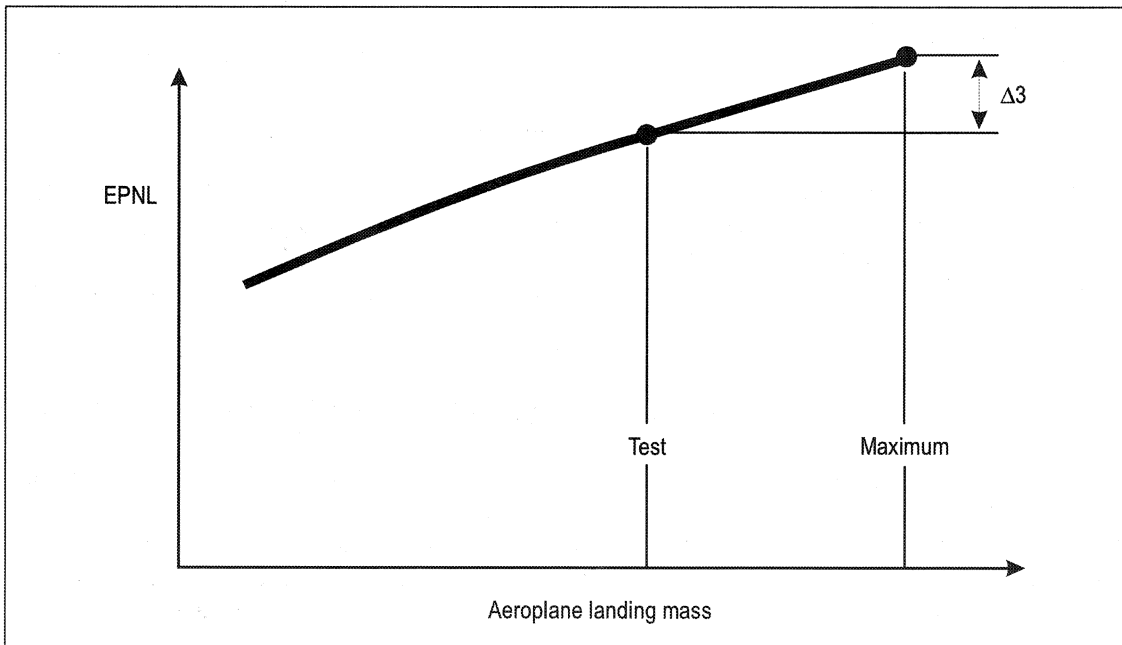


Figure A1-11. Approach mass correction for EPNL


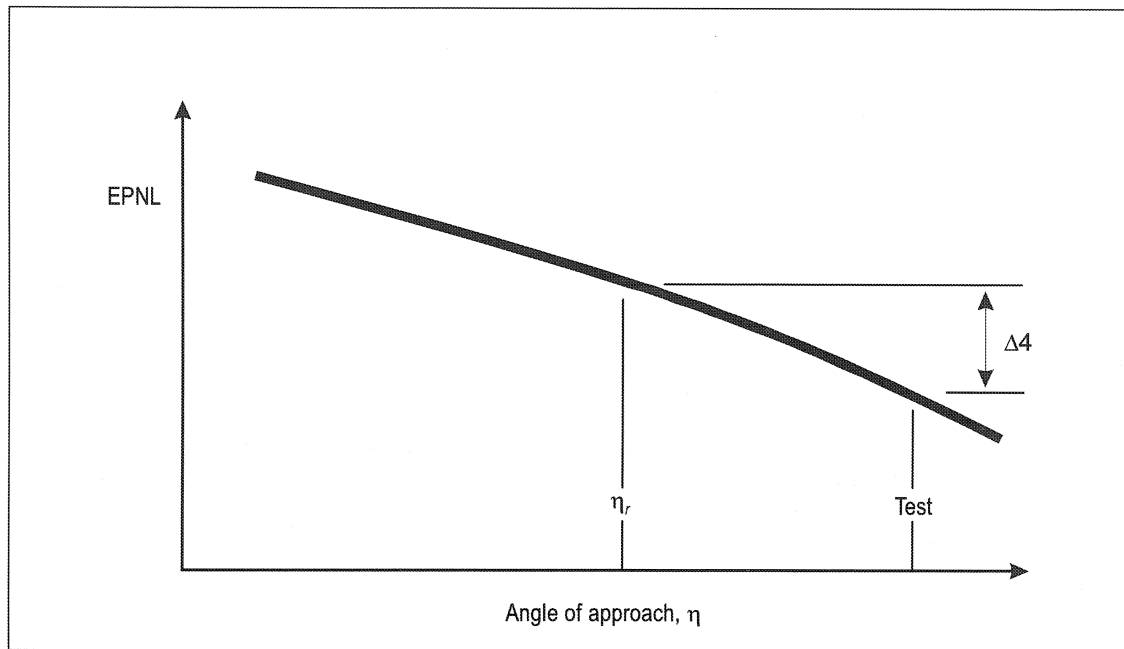


Figure A1-12. Approach angle correction for EPNL



APPENDIX 2. EVALUATION METHOD FOR NOISE CERTIFICATION OF:

- 1.— SUBSONIC JET AEROPLANES — Application for Type Certificate submitted on or after 6 October 1977
- 2.— PROPELLER-DRIVEN AEROPLANES OVER 5 700 kg — Application for Type Certificate submitted on or after 1 January 1985 and before 17 November 1988
- 3.— PROPELLER-DRIVEN AEROPLANES OVER 8 618 kg — Application for Type Certificate submitted on or after 17 November 1988
- 4.— HELICOPTERS

Note.— See Part II, Chapters 3, 4 and 8.

1. INTRODUCTION

Note 1.— This noise evaluation method includes:

- a) noise certification test and measurement conditions;
- b) measurement of aeroplane and helicopter noise received on the ground;
- c) calculation of effective perceived noise level from measured noise data; and
- d) reporting of data to the certifying authority and correcting measured data.

Note 2.— The instructions and procedures given in the method are clearly delineated to ensure uniformity during compliance tests, and to permit comparison between tests of various types of aircraft conducted in various geographical locations.

Note 3.— A complete list of symbols and units, the mathematical formulation of perceived noisiness, a procedure for determining atmospheric attenuation of sound, and detailed procedures for correcting noise levels from non-reference to reference conditions are included in Sections 6 to 9 of this appendix.

2. NOISE CERTIFICATION TEST AND MEASUREMENT CONDITIONS

2.1 General

This section prescribes the conditions under which noise certification tests shall be conducted and the measurement procedures that shall be used.

Note.— Many applications for a noise certificate involve only minor changes to the aircraft type design. The resultant changes in noise can often be established reliably without the necessity of resorting to a complete test as outlined in this appendix. For this reason certifying authorities are encouraged to permit the use of appropriate “equivalent procedures”. Also, there are equivalent procedures that may be used in full certification tests, in the interest of reducing costs and providing reliable results. Guidance material on the use of equivalent procedures in the noise certification of subsonic jet and propeller-driven aeroplanes and helicopters is provided in the Environmental Technical Manual on the Use of Procedures in the Noise Certification of Aircraft (Doc 9501).

2.2 Test environment

2.2.1 Microphone locations

Locations for measuring noise from an aircraft in flight shall be surrounded by relatively flat terrain having no excessive sound absorption characteristics such as might be caused by thick, matted, or tall grass, shrubs, or wooded areas. No obstructions which significantly influence the sound field from the aircraft shall exist within a conical space above the point on the ground vertically below the microphone, the cone being defined by an axis normal to the ground and by a half-angle 80° from this axis.

Note.— Those people carrying out the measurements could themselves constitute such obstructions.

2.2.2 Atmospheric conditions

2.2.2.1 Specifications

For the purposes of noise certification in this section the following specifications apply:

Average cross-wind component shall be determined from the series of individual values of the “cross track” (v) component of the wind samples obtained during the aircraft test run, using a linear averaging process over 30 seconds or an averaging process that has a time constant of no more than 30 seconds, the result of which is read out at a moment approximately 15 seconds after the time at which the aircraft passes either over or abeam the microphone.

Average wind speed shall be determined from the series of individual wind speed samples obtained during the aircraft test run, using a linear averaging process over 30 seconds, or an averaging process that has a time constant of no more than 30 seconds, the result of which is read out at a moment approximately 15 seconds after the time at which the aircraft passes either over or abeam the microphone. Alternatively, each wind vector shall be broken down into its “along track” (u) and “cross-track” (v) components. The u and v components of the series of individual wind samples obtained during the aircraft test run shall be separately averaged using a linear averaging process over 30 seconds, or an averaging process that has a time constant of no more than 30 seconds, the result of which is read out at a moment approximately 15 seconds after the time at which the aircraft passes either over or abeam the microphone. The average wind speed and direction (with respect to the track) shall then be calculated from the averaged u and v components according to Pythagorean Theorem and “ $\arctan(u/v)$ ”.

Distance constant (or response length) is the passage of wind (in metres) required for the output of a wind speed sensor to indicate $100 \cdot (1 - 1/e)$ per cent (about 63 per cent) of a step-function increase of the input speed.

Maximum cross-wind component. The maximum value within the series of individual values of the “cross track” (v) component of the wind samples recorded every second over a period that spans the 10 dB-down time interval.

Maximum wind speed. The maximum value within the series of individual wind speed samples recorded every second over a period that spans the 10 dB-down time interval.

Time constant (of a first order system) is the time required for a device to detect and indicate $100*(1-1/e)$ per cent (about 63 per cent) of a step function change. (The mathematical constant, e , is the base number of the natural logarithm, approximately 2.7183 – also known as *Euler’s number*, or *Napier’s constant*.)

Wind direction sample (at a certain moment) is the value obtained at that moment from a wind direction sensor/system with characteristics as follows:

Wind speed operating range:	3.6 km/h (2 kt) to more than 36 km/h (20 kt);
Linearity:	+/- 5 degrees over the specified range; and
Resolution:	5 degrees.

Note.— For the entire wind sensing system used to obtain wind speed and direction samples, the combined dynamic characteristics, including physical inertia of the sensor(s), and any temporal processing, such as filtering of the sensor signal(s), or smoothing or averaging of the wind sensor data, shall be equivalent to a first order system (such as an R/C circuit) with a time constant of no greater than 3 seconds at a wind speed of 18 km/h (10 kt).

Wind speed sample (at a certain moment) is the value measured at that moment for wind speed using a sensor/system with characteristics as follows:

Range:	3.6 km/h (2 kt) to more than 36 km/h (20 kt);
Linearity:	+/- 1.8 km/h (1 kt) over the specified range; and
Distance constant (response length):	less than 5 metres for systems having dynamic behaviour best characterised by a distance constant; or
Time constant:	less than 3 seconds for wind speeds at or above 18 km/h (10 kt) for systems having dynamic behaviour best characterised by a time constant.

Wind vector (at a certain moment). At least once every second the wind vector shall be determined. Its magnitude will be represented at a certain moment by the wind speed sample at that moment and the direction of the vector shall be represented by the wind direction sample at that moment.

2.2.2.2 Except as provided in 2.2.2.5, the tests shall be carried out under the following atmospheric conditions:

- a) no precipitation;
- b) ambient air temperature not above 35°C and not below -10°C, and relative humidity not above 95 per cent and not below 20 per cent over the whole noise path between a point 10 m (33 ft) above the ground and the aircraft;

Note.— Care should be taken to ensure that the noise measuring, aircraft flight path tracking and meteorological instrumentation are operated within the environmental limitations specified by the manufacturer.

- c) relative humidity and ambient temperature over the whole noise path between a point 10 m (33 ft) above the ground and the aircraft altitude at the time of PNLTM, such that the sound attenuation due to atmospheric absorption in the one-third octave band centred on 8 kHz will not be more than 12 dB/100 m;

Note.— Section 7 of this appendix specifies the method for calculation of atmospheric absorption coefficients based on temperature, humidity and frequency.

- d) if the atmospheric absorption coefficients vary over the PNLTM sound propagation path by more than ± 0.5 dB/100 m in the 3 150 Hz one-third octave band from the value of the absorption coefficient derived from the meteorological measurement obtained at 10 m above the surface, “layered” sections of the atmosphere must be used to compute equivalent weighted sound attenuations in each one-third octave band, sufficient sections being used to the satisfaction of the certificating authority; where multiple layering is not required, equivalent sound attenuations in each one-third octave band shall be determined by averaging the atmospheric absorption coefficients for each such band at 10 m (33 ft) above ground level and at the flight level of the test aircraft at the time of PNLTM, for each measurement;
- e) at 10 m (33 ft) above ground, for aeroplanes, the average wind speed shall not exceed 22 km/h (12 kt) and the average cross-wind component shall not exceed 13 km/h (7 kt). For helicopters, the average wind speed shall not exceed 19 km/h (10 kt) and the average cross-wind component shall not exceed 9 km/h (5 kt). For aeroplanes, the maximum wind speed shall not exceed 28 km/h (15 kt), and the maximum cross-wind component shall not exceed 18 km/h (10 kt). All wind speed samples shall be taken with the sensor installed such that the horizontal distance between the anemometer and any obstruction is at least 10 times the height of the obstruction. Installation error for the wind direction sensor shall be no greater than 5 degrees; and
- f) no anomalous meteorological or wind conditions that would significantly affect the measured noise levels when the noise is recorded at the measuring points specified by the certificating authority.

2.2.2.3 Meteorological measurements of ambient temperature and relative humidity shall be obtained within 30 minutes of each noise test measurement. Meteorological data shall be interpolated to actual times of each noise measurement. Wind measurements shall be obtained continuously during each aircraft test run.

2.2.2.4 When a multiple layering calculation is required by 2.2.2.2 d), the atmosphere between the aircraft and 10 m (33 ft) above the ground shall be divided into layers of equal depth. The depth of the layers shall be set to not more than the depth of the narrowest layer across which the variation in the atmospheric absorption coefficient of the 3 150 Hz one-third octave band is not greater than ± 0.5 dB/100 m, with a minimum layer depth of 30 m (100 ft). This shall apply over the propagation path at PNLTM. The mean of the values of the atmospheric absorption coefficients at the top and bottom of each layer may be used to characterize the absorption properties of each layer.

2.2.2.5 For helicopters the requirements of 2.2.2.2 b), c) and d) shall only be applied at a point 10 m (33 ft) above ground.

2.2.2.6 The atmospheric conditions shall be measured within 2 000 m (6 562 ft) from the microphone locations and shall be representative of the conditions existing over the geographical area in which noise measurements are made.

2.3 Flight path measurement

2.3.1 The aircraft height and lateral position relative to the flight track shall be determined by a method independent of normal flight instrumentation, such as radar tracking, theodolite triangulation or photographic scaling techniques, to be approved by the certificating authority.

2.3.2 The aircraft position along the flight path shall be related to the noise recorded at the noise measurement locations by means of synchronizing signals over a distance sufficient to assure adequate data during the period that the noise is within 10 dB of the maximum value of PNLT.

2.3.3 Position and performance data required to make the adjustments referred to in Section 8 or 9 of this appendix shall be automatically recorded at an approved sampling rate. Measuring equipment shall be approved by the certificating authority.

3. MEASUREMENT OF AIRCRAFT NOISE RECEIVED ON THE GROUND

3.1 Definitions

For the purposes of this section the following definitions apply:

Ambient noise. The acoustical noise from sources other than the test aircraft present at the microphone site during aircraft noise measurement. Ambient noise is one component of background noise.

Background noise. The combined noise present in a measurement system from sources other than the test aircraft, which can influence or obscure the aircraft noise levels being measured. Typical elements of background noise include (but are not limited to): ambient noise from sources around the microphone site; thermal electrical noise generated by components in the measurement system; magnetic flux noise (“tape hiss”) from analogue tape recorders; and digitization noise caused by quantization error in digital converters. Some elements of background noise, such as digitization noise, can obscure the aircraft noise signal, while others, such as ambient noise, can also contribute energy to the measured aircraft noise signal.

Broadband noise. Noise for which the frequency spectrum is continuous (i.e. energy is present at all frequencies in a given range) and which lacks any discrete frequency components (i.e. tones).

Calibration check frequency. In hertz, the nominal frequency of the sinusoidal sound pressure signal produced by the sound calibrator.

Calibration sound pressure level. In decibels, the sound pressure level produced, under reference environmental conditions, in the cavity of the coupler of the sound calibrator that is used to determine the overall acoustical sensitivity of a measurement system.

Free-field sensitivity level of a microphone system. In decibels, twenty times the logarithm to the base ten of the ratio of the free-field sensitivity of a microphone system and the reference sensitivity of one volt per pascal.

Note.— The free-field sensitivity level of a microphone system may be determined by subtracting the sound pressure level (in decibels re 20 μ Pa) of the sound incident on the microphone from the voltage level (in decibels re 1 V) at the output of the microphone system, and adding 93.98 dB to the result.

Free-field sensitivity of a microphone system. In volts per pascal, for a sinusoidal plane progressive sound wave of specified frequency, at a specified sound-incident angle, the quotient of the root-mean-square voltage at the output of a microphone system and the root-mean-square sound pressure that would exist at the position of the microphone in its absence.

Level difference. In decibels, for any nominal one-third octave midband frequency, the output signal level measured on any level range minus the level of the corresponding electrical input signal.

Level non-linearity. In decibels, the level difference measured on any level range, at a stated one-third octave nominal midband frequency, minus the corresponding reference level difference, all input and output signals being relative to the same reference quantity.

Level range. In decibels, an operating range determined by the setting of the controls that are provided in a measurement system for the recording and one-third octave band analysis of a sound pressure signal. The upper boundary associated with any particular level range shall be rounded to the nearest decibel.

Linear operating range. In decibels, for a stated level range and frequency, the range of levels of steady sinusoidal electrical signals applied to the input of the entire measurement system, exclusive of the microphone but including the microphone preamplifier and any other signal-conditioning elements that are considered to be part of the microphone system, extending from a lower to an upper boundary, over which the level non-linearity is within specified tolerance limits.

Note.— It is not necessary to include microphone extension cables as configured in the field.

Measurement system. The combination of instruments used for the measurement of sound pressure levels, including a sound calibrator, windscreen, microphone system, signal recording and conditioning devices, and a one-third octave band analysis system.

Note.— Practical installations may include a number of microphone systems, the outputs from which are recorded simultaneously by a multi-channel recording/analysis device via signal conditioners as appropriate. For the purpose of this section, each complete measurement channel is considered to be a measurement system to which the requirements apply accordingly.

Microphone system. The components of the measurement system which produce an electrical output signal in response to a sound pressure input signal, and which generally include a microphone, a preamplifier, extension cables, and other devices as necessary.

Reference direction. In degrees, the direction of sound incidence specified by the manufacturer of the microphone, relative to a sound incidence angle of 0°, for which the free-field sensitivity level of the microphone system is within specified tolerance limits.

Reference level difference. In decibels, for a stated frequency, the level difference measured on a level range for an electrical input signal corresponding to the calibration sound pressure level, adjusted as appropriate, for the level range.

Reference level range. In decibels, the level range for determining the acoustical sensitivity of the measurement system and containing the calibration sound pressure level.

Sound incidence angle. In degrees, an angle between the principal axis of the microphone and a line from the sound source to the centre of the diaphragm of the microphone.

Note.— When the sound incidence angle is 0°, the sound is said to be received at the microphone at “normal (perpendicular) incidence”; when the sound incidence angle is 90°, the sound is said to be received at “grazing incidence”. The principal axis of a measurement microphone is through the centre of the diaphragm and perpendicular to it.

Time-average band sound pressure level. In decibels, ten times the logarithm to the base ten, of the ratio of the time mean-square of the instantaneous sound pressure during a stated time interval and in a specified one-third octave band, to the square of the reference sound pressure of 20 µPa.

Windscreen insertion loss. In decibels, at a stated nominal one-third octave midband frequency, and for a stated sound incidence angle on the inserted microphone, the indicated sound pressure level without the windscreen installed around the microphone minus the sound pressure level with the windscreen installed.

3.2 Reference environmental conditions

The reference environmental conditions for specifying the performance of a measurement system are:

- air temperature 23°C
- static air pressure 101.325 kPa
- relative humidity 50 per cent.

3.3 General

Note.— Measurements of aircraft noise that utilize instruments that conform to the specifications of this section yield one-third octave band sound pressure levels as a function of time, for the calculation of the effective perceived noise level as described in Section 4.

3.3.1 The measurement system shall consist of equipment approved by the certificating authority and equivalent to the following:

- a) a windscreen (see 3.4);
- b) a microphone system (see 3.5);
- c) a recording and reproducing system to store the measured aircraft noise signals for subsequent analysis (see 3.6);
- d) a one-third octave band analysis system (see 3.7); and
- e) calibration systems to maintain the acoustical sensitivity of the above systems within specified tolerance limits (see 3.8).

3.3.2 For any component of the measurement system that converts an analogue signal to digital form, such conversion shall be performed so that the levels of any possible aliases or artefacts of the digitization process will be less than the upper boundary of the linear operating range by at least 50 dB at any frequency less than 12.5 kHz. The sampling rate shall be at least 28 kHz. An anti-aliasing filter shall be included before the digitization process.

3.4 Windscreen

In the absence of wind and for sinusoidal sounds at grazing incidence, the insertion loss caused by the windscreen of a stated type installed around the microphone shall not exceed ± 1.5 dB at nominal one-third octave midband frequencies from 50 Hz to 10 kHz inclusive.

3.5 Microphone system

3.5.1 The microphone system shall conform to the specifications in 3.5.2 to 3.5.4. Various microphone systems may be approved by the certificating authority on the basis of demonstrated equivalent overall electroacoustical performance. Where two or more microphone systems of the same type are used, demonstration that at least one system conforms to the specifications in full is sufficient to demonstrate conformance.

Note.— This demonstration of equivalent performance does not eliminate the need to calibrate and check each system as defined in 3.9.

3.5.2 The microphone shall be mounted with the sensing element 1.2 m (4 ft) above the local ground surface and shall be oriented for grazing incidence, i.e. with the sensing element substantially in the plane defined by the predicted reference flight path of the aircraft and the measuring station. The microphone mounting arrangement shall minimize the interference of the supports with the sound to be measured. Figure A2-1 illustrates sound incidence angles on a microphone.

3.5.3 The free-field sensitivity level of the microphone and preamplifier in the reference direction, at frequencies over at least the range of one-third octave nominal midband frequencies from 50 Hz to 5 kHz inclusive, shall be within ± 1.0 dB of that at the calibration check frequency, and within ± 2.0 dB for nominal midband frequencies of 6.3 kHz, 8 kHz and 10 kHz.

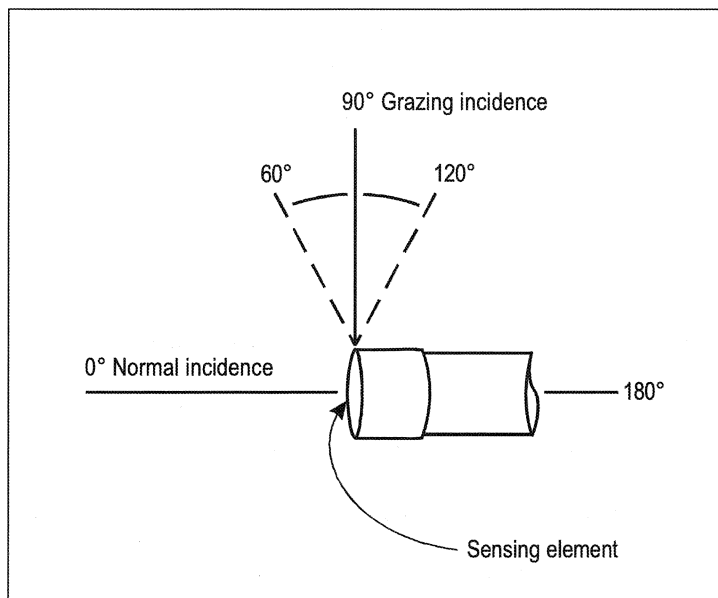


Figure A2-1. Illustration of sound incidence angles on a microphone

3.5.4 For sinusoidal sound waves at each one-third octave nominal midband frequency over the range from 50 Hz to 10 kHz inclusive, the free-field sensitivity levels of the microphone system at sound incidence angles of 30°, 60°, 90°, 120° and 150° shall not differ from the free-field sensitivity level at a sound incidence angle of 0° (“normal incidence”) by more than the values shown in Table A2-1. The free-field sensitivity level differences at sound incidence angles between any two adjacent sound incidence angles in Table A2-1 shall not exceed the tolerance limit for the greater angle.

3.6 Recording and reproducing systems

3.6.1 A recording and reproducing system, such as a digital or analogue magnetic tape recorder, a computer-based system or other permanent data storage device, shall be used to store sound pressure signals for subsequent analysis. The sound produced by the aircraft shall be recorded in such a way that a record of the complete acoustical signal is retained. The recording and reproducing systems shall conform to the specifications in 3.6.2 to 3.6.9 at the recording speeds and/or data sampling rates used for the noise certification tests. Conformance shall be demonstrated for the frequency bandwidths and recording channels selected for the tests.

3.6.2 The recording and reproducing systems shall be calibrated as described in 3.9.

Note.— For aircraft noise signals for which the high frequency spectral levels decrease rapidly with increasing frequency, appropriate pre-emphasis and complementary de-emphasis networks may be included in the measurement system. If pre-emphasis is included, over the range of nominal one-third octave midband frequencies from 800 Hz to 10 kHz inclusive, the electrical gain provided by the pre-emphasis network shall not exceed 20 dB relative to the gain at 800 Hz.

3.6.3 For steady sinusoidal electrical signals applied to the input of the entire measurement system exclusive of the microphone system, but including the microphone preamplifier, and any other signal-conditioning elements that are considered to be part of the microphone system, at a selected signal level within 5 dB of that corresponding to the calibration sound pressure level on the reference level range, the time average signal level indicated by the readout device at any one-third octave nominal midband frequency from 50 Hz to 10 kHz inclusive shall be within ± 1.5 dB of that at the calibration check frequency. The frequency response of a measurement system, which includes components that convert analogue signals to digital form, shall be within ± 0.3 dB of the response at 10 kHz over the frequency range from 10 kHz to 11.2 kHz.

Note.— It is not necessary to include microphone extension cables as configured in the field.

3.6.4 For analogue tape recordings, the amplitude fluctuations of a 1 kHz sinusoidal signal recorded within 5 dB of the level corresponding to the calibration sound pressure level shall not vary by more than ± 0.5 dB throughout any reel of the type of magnetic tape utilized. Conformance to this requirement shall be demonstrated using a device which has time-averaging properties equivalent to those of the spectrum analyser.

3.6.5 For all appropriate level ranges and for steady sinusoidal electrical signals applied to the input of the measurement system exclusive of the microphone system, but including the microphone preamplifier, and any other signal-conditioning elements that are considered to be part of the microphone system, at one-third octave nominal midband frequencies of 50 Hz, 1 kHz and 10 kHz, and the calibration check frequency, if it is not one of these frequencies, the level non-linearity shall not exceed ± 0.5 dB for a linear operating range of at least 50 dB below the upper boundary of the level range.

Note 1.— Level linearity of measurement system components should be tested according to the methods described in IEC 61265¹ as amended.

Note 2.— It is not necessary to include microphone extension cables as configured in the field.

3.6.6 On the reference level range, the level corresponding to the calibration sound pressure level shall be at least 5 dB, but no more than 30 dB less than the upper boundary of the level range.

Table A2-1. Microphone directional response requirements

Nominal midband frequency kHz	Maximum difference between the free-field sensitivity level of a microphone system at normal incidence and the free-field sensitivity level at specified sound incidence angles (dB)				
	Sound incidence angle degrees				
	30	60	90	120	150
0.05 to 1.6	0.5	0.5	1.0	1.0	1.0
2.0	0.5	0.5	1.0	1.0	1.0
2.5	0.5	0.5	1.0	1.5	1.5
3.15	0.5	1.0	1.5	2.0	2.0
4.0	0.5	1.0	2.0	2.5	2.5
5.0	0.5	1.5	2.5	3.0	3.0
6.3	1.0	2.0	3.0	4.0	4.0
8.0	1.5	2.5	4.0	5.5	5.5
10.0	2.0	3.5	5.5	6.5	7.5

1. IEC 61265:1995 entitled "Electroacoustics — Instruments for measurement of aircraft noise — Performance requirements for systems to measure one-third-octave band sound pressure levels in noise certification of transport-category aeroplanes". This IEC publication may be obtained from the Central Office of the International Electrotechnical Commission, 3 rue de Varembe, Geneva, Switzerland.

3.6.7 The linear operating ranges on adjacent level ranges shall overlap by at least 50 dB minus the change in attenuation introduced by a change in the level range controls.

Note.— It is possible for a measurement system to have level range controls that permit attenuation changes of, for example, either 10 dB or 1 dB. With 10 dB steps, the minimum overlap required would be 40 dB, and with 1 dB steps the minimum overlap would be 49 dB.

3.6.8 Provision shall be made for an overload indication to occur during an overload condition on any relevant level range.

3.6.9 Attenuators included in the measurement system to permit range changes shall operate in known intervals of decibel steps.

3.7 Analysis systems

3.7.1 The analysis system shall conform to the specifications in 3.7.2 to 3.7.7 for the frequency bandwidths, channel configurations and gain settings used for analysis.

3.7.2 The output of the analysis system shall consist of one-third octave band sound pressure levels as a function of time, obtained by processing the noise signals (preferably recorded) through an analysis system with the following characteristics:

- a) a set of 24 one-third octave band filters, or their equivalent, having nominal midband frequencies from 50 Hz to 10 kHz inclusive;
- b) response and averaging properties in which, in principle, the output from any one-third octave filter band is squared, averaged and displayed or stored as time-averaged sound pressure levels;
- c) the interval between successive sound pressure level samples shall be $500 \text{ ms} \pm 5 \text{ ms}$ for spectral analysis with or without SLOW time weighting;
- d) for those analysis systems that do not process the sound pressure signals during the period of time required for readout and/or resetting of the analyser, the loss of data shall not exceed a duration of 5 ms; and
- e) the analysis system shall operate in real time from 50 Hz to at least 12 kHz inclusive. This requirement applies to all operating channels of a multichannel spectral analysis system.

3.7.3 The one-third octave band analysis system shall conform to the class 1 electrical performance requirements of IEC 61260² as amended, over the range of one-third octave nominal midband frequencies from 50 Hz to 10 kHz inclusive.

Note 1.— The certificating authority may allow the substitution of an analysis system that complies with class 2 as an alternative to class 1 electrical performance requirements of IEC 61260².

Note 2.— Tests of the one-third octave band analysis system should be made according to the methods described in IEC 61260² or by an equivalent procedure approved by the certificating authority, for relative attenuation, anti-aliasing filters, real-time operation, level linearity, and filter integrated response (effective bandwidth).

3.7.4 When SLOW time averaging is performed in the analyser, the response of the one-third octave band analysis system to a sudden onset or interruption of a constant sinusoidal signal at the respective one-third octave nominal midband

2. IEC 61260:1995 entitled “Electroacoustics — Octave-band and fractional-octave-band filters”. This IEC publication may be obtained from the Central Office of the International Electrotechnical Commission, 3 rue de Varembé, Geneva, Switzerland.

frequency shall be measured at sampling instants 0.5, 1, 1.5 and 2 seconds after the onset and 0.5 and 1 seconds after interruption. The rising response shall be -4 ± 1 dB at 0.5 seconds, -1.75 ± 0.75 dB at 1 second, -1 ± 0.5 dB at 1.5 seconds and -0.5 ± 0.5 dB at 2 seconds relative to the steady-state level. The falling response shall be such that the sum of the output signal levels, relative to the initial steady-state level, and the corresponding rising response reading is -6.5 ± 1 dB, at both 0.5 and 1 seconds. At subsequent times the sum of the rising and falling responses shall be -7.5 dB or less. This equates to an exponential averaging process (SLOW weighting) with a nominal 1-second time constant (i.e. 2 seconds averaging time).

3.7.5 When the one-third octave band sound pressure levels are determined from the output of the analyser without SLOW time weighting, SLOW time weighting shall be simulated in the subsequent processing. Simulated SLOW weighted sound pressure levels can be obtained using a continuous exponential averaging process by the following equation:

$$L_s(i,k) = 10 \log [(0.60653) 10^{0.1L_s[i,(k-1)]} + (0.39347) 10^{0.1L(i,k)}]$$

where $L_s(i,k)$ is the simulated SLOW weighted sound pressure level and $L(i,k)$ is the as-measured 0.5 seconds time average sound pressure level determined from the output of the analyser for the k -th instant of time and the i -th one-third octave band. For $k = 1$, the SLOW weighted sound pressure $L_s[i,(k-1 = 0)]$ on the right-hand side shall be set to 0 dB.

An approximation of the continuous exponential averaging is represented by the following equation for a four sample averaging process for $k = 4$:

$$L_s(i,k) = 10 \log [(0.13) 10^{0.1L[i,(k-3)]} + (0.21) 10^{0.1L[i,(k-2)]} + (0.27) 10^{0.1L[i,(k-1)]} + (0.39) 10^{0.1L[i,k]}]$$

where $L_s(i,k)$ is the simulated SLOW weighted sound pressure level and $L(i,k)$ is the as-measured 0.5 seconds time average sound pressure level determined from the output of the analyser for the k -th instant of time and the i -th one-third octave band.

The sum of the weighting factors is 1.0 in the two equations. Sound pressure levels calculated by means of either equation are valid for the sixth and subsequent 0.5 seconds data samples, or for times greater than 2.5 seconds after initiation of data analysis.

Note.— The coefficients in the two equations were calculated for use in determining equivalent SLOW weighted sound pressure levels from samples of 0.5 seconds time average sound pressure levels. The equations should not be used with data samples where the averaging time differs from 0.5 seconds.

3.7.6 The instant in time by which a SLOW time weighted sound pressure level is characterized shall be 0.75 seconds earlier than the actual readout time.

Note.— The definition of this instant in time is required to correlate the recorded noise with the aircraft position when the noise was emitted and takes into account the averaging period of the SLOW weighting. For each one-half second data record this instant in time may also be identified as 1.25 seconds after the start of the associated 2 seconds averaging period.

3.7.7 The resolution of the sound pressure levels, both displayed and stored, shall be 0.1 dB or better.

3.8 Calibration systems

The acoustical sensitivity of the measurement system shall be determined using a sound calibrator generating a known sound pressure level at a known frequency. The sound calibrator shall at least conform to the class 1L requirements of IEC 60942³ as amended.

3. IEC 60942:2003 entitled "Electroacoustics — Sound calibrators". This IEC publication may be obtained from the Central Office of the International Electrotechnical Commission, 3 rue de Varembé, Geneva, Switzerland.

3.9 Calibration and checking of system

3.9.1 Calibration and checking of the measurement system and its constituent components shall be carried out to the satisfaction of the certificating authorities by the methods specified in 3.9.2 to 3.9.10. The calibration adjustments, including those for environmental effects on sound calibrator output level, shall be reported to the certificating authority and applied to the measured one-third octave sound pressure levels determined from the output of the analyser. Data collected during an overload indication are invalid and shall not be used. If the overload condition occurred during recording, the associated test data shall be considered as invalid, whereas if the overload occurred during analysis, the analysis shall be repeated with reduced sensitivity to eliminate the overload.

3.9.2 The free-field frequency response of the microphone system may be determined by using an electrostatic actuator in combination with the manufacturer's data or by testing in an anechoic free-field facility. The correction for frequency response shall be determined within 90 days of each test series. The correction for non-uniform frequency response of the microphone system shall be reported to the certificating authority and applied to the measured one-third octave band sound pressure levels determined from the output of the analyser.

3.9.3 When the angles of incidence of sound emitted from the aircraft are within $\pm 30^\circ$ of grazing incidence at the microphone (see Figure A2-1), a single set of free-field corrections based on grazing incidence is considered sufficient for correction of directional response effects. For other cases, the angle of incidence for each one-half second sample shall be determined and applied for the correction of incidence effects.

3.9.4 For analogue magnetic tape recorders, each reel of magnetic tape shall carry at least 30 seconds of pink random or pseudo-random noise at its beginning and end. Data obtained from analogue tape-recorded signals shall be accepted as reliable only if level differences in the 10 kHz one-third octave band are not more than 0.75 dB for the signals recorded at the beginning and end.

3.9.5 The frequency response of the entire measurement system while deployed in the field during the test series, exclusive of the microphone, shall be determined at a level within 5 dB of the level corresponding to the calibration sound pressure level on the level range used during the tests for each one-third octave nominal midband frequency from 50 Hz to 10 kHz inclusive, utilizing pink random or pseudo-random noise. The output of the noise generator shall be determined by a method traceable to a national standards laboratory within six months of each test series, and tolerable changes in the relative output from the previous calibration at each one-third octave band shall be not more than 0.2 dB. The correction for frequency response shall be reported to the certificating authority and applied to the measured one-third octave sound pressure levels determined from the output of the analyser.

3.9.6 The performance of switched attenuators in the equipment used during noise certification measurements and calibration shall be checked within six months of each test series to ensure that the maximum error does not exceed 0.1 dB.

3.9.7 The sound pressure level produced in the cavity of the coupler of the sound calibrator shall be calculated for the test environmental conditions using the manufacturer's supplied information on the influence of atmospheric air pressure and temperature. The sound pressure level shall be used to establish the acoustical sensitivity of the measurement system. The output of the sound calibrator shall be determined by a method traceable to a national standards laboratory within six months of each test series and tolerable changes in output from the previous calibration shall be not more than 0.2 dB.

3.9.8 Sufficient sound pressure level calibrations shall be made during each test day to ensure that the acoustical sensitivity of the measurement system is known at the prevailing environmental conditions corresponding with each test series. The measurement system shall be considered satisfactory if the difference is not greater than 0.5 dB between the acoustical sensitivity levels recorded immediately before and immediately after each test series on a given day. The 0.5 dB limit applies after any atmospheric pressure corrections have been determined for the calibrator output level. The arithmetic mean of the before and after measurements shall be used to represent the acoustical sensitivity level of the measurement system for that test series. The calibration corrections shall be reported to the certificating authority and applied to the measured one-third octave band sound pressure levels determined from the output of the analyser.

3.9.9 Each recording medium, such as a reel, cartridge, cassette, or diskette, shall carry a sound pressure level calibration of at least 10 seconds duration at its beginning and end.

3.9.10 The free-field insertion loss of the windscreen for each one-third octave nominal midband frequency from 50 Hz to 10 kHz inclusive shall be determined with sinusoidal sound signals at appropriate incidence angles on the inserted microphone. For a windscreen which is undamaged and uncontaminated, the insertion loss may be taken from the manufacturer's data. In addition, the insertion loss of the windscreen may be determined by a method traceable to a national standards laboratory within six months of each test series, and tolerable changes in the insertion loss from the previous calibration at each one-third octave frequency band shall be not more than 0.4 dB. The correction for the free-field insertion loss of the windscreen shall be reported to the certifying authority and applied to the measured one-third octave sound pressure levels determined from the output of the analyser.

3.10 Adjustments for background noise

3.10.1 Background noise shall be recorded (for at least 30 seconds) at the measurement points with the system gain set at the levels used for the aircraft noise measurements. The recorded background noise sample shall be representative of that which exists during the test run. The recorded aircraft noise data shall be accepted only if the background noise levels, when analysed in the same way and quoted in PNL (see 4.1.3 a)), are at least 20 dB below the maximum PNL of the aircraft.

3.10.2 Aircraft sound pressure levels within the 10 dB-down points (see 4.5.1) shall exceed mean background noise levels determined above by at least 3 dB in each one-third octave band or be adjusted using a method similar to that described in Appendix 3 of Doc 9501.

4. CALCULATION OF EFFECTIVE PERCEIVED NOISE LEVEL FROM MEASURED NOISE DATA

4.1 General

4.1.1 The basic element in the noise certification criteria shall be the noise evaluation measure designated effective perceived noise level, EPNL, in units of EPNdB, which is a single number evaluator of the subjective effects of aircraft noise on human beings. Simply stated, EPNL shall consist of instantaneous perceived noise level, PNL, corrected for spectral irregularities (the correction, called "tone correction factor", is made for the maximum tone only at each increment of time) and for duration.

4.1.2 Three basic physical properties of sound pressure shall be measured: level, frequency distribution, and time variation. More specifically, the instantaneous sound pressure level in each of 24 one-third octave bands of the noise shall be required for each 500 ms increment of time during the aircraft noise measurement.

4.1.3 The calculation procedure which utilizes physical measurements of noise to derive the EPNL evaluation measure of subjective response shall consist of the following five steps:

- a) the 24 one-third octave bands of sound pressure level are converted to perceived noisiness by the methods of Section 4.7. The noy values are combined and then converted to instantaneous perceived noise levels, $PNL(k)$;
- b) a tone correction factor, $C(k)$, is calculated for each spectrum to account for the subjective response to the presence of spectral irregularities;
- c) the tone correction factor is added to the perceived noise level to obtain tone corrected perceived noise levels, $PNLT(k)$, at each one-half second increment of time:

$$\text{PNLT}(k) = \text{PNL}(k) + C(k)$$

The instantaneous values of tone corrected perceived noise level are derived and the maximum value, PNLTM, is determined;

- d) a duration correction factor, D , is computed by integration under the curve of tone corrected perceived noise level versus time;
- e) effective perceived noise level, EPNL, is determined by the algebraic sum of the maximum tone corrected perceived noise level and the duration correction factor:

$$\text{EPNL} = \text{PNLTM} + D.$$

4.2 Perceived noise level

Instantaneous perceived noise levels, $\text{PNL}(k)$, shall be calculated from instantaneous one-third octave band sound pressure levels, $\text{SPL}(i, k)$, as follows:

Step 1. Convert each one-third octave band, $\text{SPL}(i, k)$, from 50 to 10 000 Hz, to perceived noisiness, $n(i, k)$, by reference to Table A4-1 (Perceived Noisiness) in Appendix 4 of Doc 9501, or to the mathematical formulation of the noy table given in Section 4.7.

Step 2. Combine the perceived noisiness values, $n(i, k)$, found in Step 1 by the following formula:

$$\begin{aligned} N(k) &= n(k) + 0.15 \left\{ \left[\sum_{i=1}^{24} n(i, k) \right] - n(k) \right\} \\ &= 0.85 n(k) + 0.15 \sum_{i=1}^{24} n(i, k) \end{aligned}$$

where $n(k)$ is the largest of the 24 values of $n(i, k)$, and $N(k)$ is the total perceived noisiness.

Step 3. Convert the total perceived noisiness, $N(k)$, into perceived noise level, $\text{PNL}(k)$, by the following formula:

$$\text{PNL}(k) = 40.0 + \frac{10}{\log 2} \log N(k)$$

Note.— $\text{PNL}(k)$ is plotted in Figure A4-1 of Appendix 4 of Doc 9501.

4.3 Correction for spectral irregularities

4.3.1 Noise having pronounced spectral irregularities (for example, the maximum discrete frequency components or tones) shall be adjusted by the correction factor, $C(k)$, calculated as follows:

Step 1. Except for helicopters which start at 50 Hz (band number 1), start with the corrected sound pressure level in the 80 Hz one-third octave band (band number 3), calculate the changes in sound pressure level (or “slopes”) in the remainder of the one-third octave bands as follows:

$$\begin{aligned}
 s(3,k) &= \text{no value} \\
 s(4,k) &= \text{SPL}(4,k) - \text{SPL}(3,k) \\
 &\cdot \\
 &\cdot \\
 &\cdot \\
 s(i,k) &= \text{SPL}(i,k) - \text{SPL}(i-1,k) \\
 &\cdot \\
 &\cdot \\
 &\cdot \\
 s(24,k) &= \text{SPL}(24,k) - \text{SPL}(23,k)
 \end{aligned}$$

Step 2. Encircle the value of the slope, $s(i,k)$, where the absolute value of the change in slope is greater than five; that is, where:

$$|\Delta s(i,k)| = |s(i,k) - s(i-1,k)| > 5$$

Step 3.

- If the encircled value of the slope $s(i,k)$ is positive and algebraically greater than the slope $s(i-1,k)$, encircle $\text{SPL}(i,k)$.
- If the encircled value of the slope $s(i,k)$ is zero or negative and the slope $s(i-1,k)$ is positive, encircle $\text{SPL}(i-1,k)$.
- For all other cases, no sound pressure level value is to be encircled.

Step 4. Compute new adjusted sound pressure levels, $\text{SPL}'(i,k)$, as follows:

- For non-encircled sound pressure levels, let the new sound pressure levels equal the original sound pressure levels, $\text{SPL}'(i,k) = \text{SPL}(i,k)$.
- For encircled sound pressure levels in bands 1 to 23 inclusive, let the new sound pressure level equal the arithmetic average of the preceding and following sound pressure levels:

$$\text{SPL}'(i,k) = \frac{1}{2} [\text{SPL}(i-1,k) + \text{SPL}(i+1,k)]$$

- If the sound pressure level in the highest frequency band ($i = 24$) is encircled, let the new sound pressure level in that band equal:

$$\text{SPL}'(24,k) = \text{SPL}(23,k) + s(23,k)$$

Step 5. Recompute new slopes $s'(i,k)$, including one for an imaginary 25th band, as follows:

$$\begin{aligned}
 s'(3,k) &= s'(4,k) \\
 s'(4,k) &= \text{SPL}'(4,k) - \text{SPL}'(3,k) \\
 &\cdot \\
 &\cdot \\
 &\cdot \\
 s'(i,k) &= \text{SPL}'(i,k) - \text{SPL}'(i-1,k) \\
 &\cdot \\
 &\cdot \\
 &\cdot \\
 s'(24,k) &= \text{SPL}'(24,k) - \text{SPL}'(23,k) \\
 s'(25,k) &= s'(24,k)
 \end{aligned}$$

Step 6. For i from 3 to 23 (or 1 to 23 for helicopters), compute the arithmetic average of the three adjacent slopes as follows:

$$\bar{s}(i,k) = \frac{1}{3} [s'(i,k) + s'(i+1,k) + s'(i+2,k)]$$

Step 7. Compute final one-third octave-band sound pressure levels, $SPL''(i,k)$, by beginning with band number 3 (or band number 1 for helicopters) and proceeding to band number 24 as follows:

$$SPL''(3,k) = SPL(3,k)$$

$$SPL''(4,k) = SPL''(3,k) + \bar{s}(3,k)$$

•
•
•

$$SPL''(i,k) = SPL''(i-1,k) + \bar{s}(i-1,k)$$

•
•
•

$$SPL''(24,k) = SPL''(23,k) + \bar{s}(23,k)$$

Step 8. Calculate the differences, $F(i,k)$, between the original sound pressure level and the final broadband sound pressure level as follows:

$$F(i,k) = SPL(i,k) - SPL''(i,k)$$

and note only values equal to or greater than one and a half.

Step 9. For each of the relevant one-third octave bands (3 to 24), determine tone correction factors from the sound pressure level differences, $F(i,k)$, and Table A2-2.

Step 10. Designate the largest of the tone correction factors, determined in Step 9, as $C(k)$. An example of the tone correction procedure is given in Table A4-2 of Appendix 4 of Doc 9501.

Tone corrected perceived noise levels $PNLT(k)$ shall be determined by adding the $C(k)$ values to corresponding $PNL(k)$ values, that is:

$$PNLT(k) = PNL(k) + C(k)$$

For any i -th one-third octave band, at any k -th increment of time, for which the tone correction factor is suspected to result from something other than (or in addition to) an actual tone (or any spectral irregularity other than aircraft noise), an additional analysis may be made using a filter with a bandwidth narrower than one-third of an octave. If the narrow band analysis corroborates these suspicions, then a revised value for the broadband sound pressure level, $SPL'(i,k)$, shall be determined from the narrow band analysis and used to compute a revised tone correction factor for that particular one-third octave band.


Note.— Other methods of rejecting spurious tone corrections such as those described in Appendix 2 of Doc 9501 may be used.

4.3.2 This procedure will underestimate EPNL if an important tone is of a frequency such that it is recorded in two adjacent one-third octave bands. It shall be demonstrated to the satisfaction of the certificating authority:

either that this has not occurred,

or that if it has occurred that the tone correction has been adjusted to the value it would have had if the tone had been recorded fully in a single one-third octave band.

Table A2-2. Tone correction factors

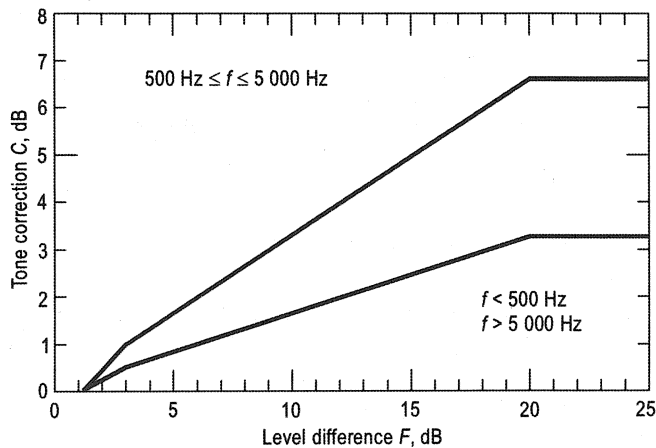

Frequency <i>f</i> , Hz	Level difference <i>F</i> , dB	Tone correction <i>C</i> , dB
$50 \leq f < 500$	$1\frac{1}{2}^* \leq F < 3$	$F/3 - \frac{1}{2}$
	$3 \leq F < 20$	$F/6$
	$20 \leq F$	$3\frac{1}{3}$
$500 \leq f \leq 5\,000$	$1\frac{1}{2}^* \leq F < 3$	$2 F/3 - 1$
	$3 \leq F < 20$	$F/3$
	$20 \leq F$	$6\frac{2}{3}$
$5\,000 < f \leq 10\,000$	$1\frac{1}{2}^* \leq F < 3$	$F/3 - \frac{1}{2}$
	$3 \leq F < 20$	$F/6$
	$20 \leq F$	$3\frac{1}{3}$

* See Step 8 of 4.3.1.

4.4 Maximum tone corrected perceived noise level

4.4.1 The maximum tone corrected perceived noise level, PNLTM, shall be the maximum calculated value of the tone corrected perceived noise level PNL*T*(*k*). It shall be calculated in accordance with the procedure of 4.3. To obtain a satisfactory noise time history, measurements shall be made at 500 ms time intervals.

Note 1.— Figure A2-2 is an example of a flyover noise time history where the maximum value is clearly indicated.

Note 2.— In the absence of a tone correction factor, PNLTM would equal PNL*M*.

4.4.2 After the value of PNLTM is obtained, the frequency band for the largest tone correction factor is identified for the two preceding and two succeeding 500 ms data samples. This is performed in order to identify the possibility of tone suppression at PNLTM by one-third octave band sharing of that tone. If the value of the tone correction factor *C*(*k*) for PNLTM is less than the average value of *C*(*k*) for the five consecutive time intervals, the average value of *C*(*k*) shall be used to compute a new value for PNLTM.

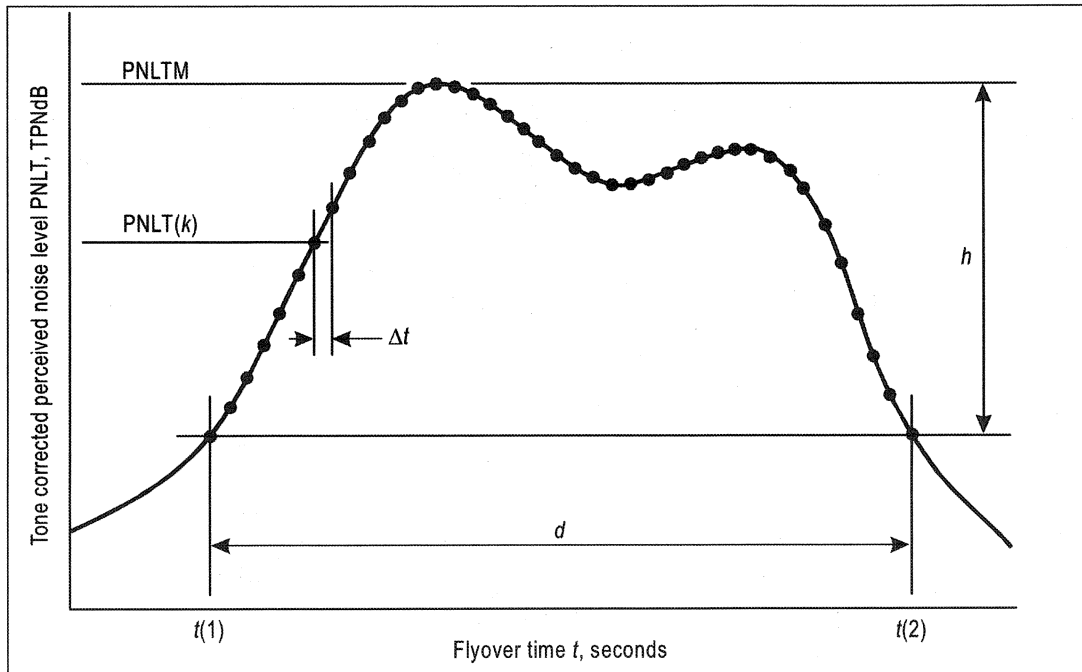


Figure A2-2. Example of perceived noise level corrected for tones as a function of aeroplane flyover time

4.5 Duration correction

4.5.1 The duration correction factor, D , determined by the integration technique shall be defined by the expression:

$$D = 10 \log \left[\left(\frac{1}{T} \right) \int_{t_1}^{t_2} \text{antilog} \frac{\text{PNLT}}{10} dt \right] - \text{PNLTM}$$

where T is a normalizing time constant, PNLTM is the maximum value of PNL, t_1 is the first point of time after which PNL becomes greater than PNLTM – 10 and t_2 is the point of time after which PNL remains constantly less than PNLTM – 10.

4.5.2 Since PNL is calculated from measured values of SPL, there will, in general, be no obvious equation for PNL as a function of time. Consequently, the equation shall be rewritten with a summation sign instead of an integral sign as follows:

$$D = 10 \log \left[\left(\frac{1}{T} \right) \sum_{k=0}^{d/\Delta t} \Delta t \cdot \text{antilog} \frac{\text{PNLT}(k)}{10} \right] - \text{PNLTM}$$

where Δt is the length of the equal increments of time for which PNL(k) is calculated and d is the time interval to the nearest 0.5 seconds during which PNL(k) remains greater or equal to PNLTM – 10.

4.5.3 To obtain a satisfactory history of the perceived noise level,

- a) half-second time intervals for Δt , or
- b) a shorter time interval with approved limits and constants,

shall be used.

4.5.4 The following values for T and Δt shall be used in calculating D in the procedure given in 4.5.2:

$$T = 10 \text{ s, and}$$

$$\Delta t = 0.5 \text{ s}$$

Using the above values, the equation for D becomes

$$D = 10 \log \left[\sum_{k=0}^{2d} \text{antilog} \frac{\text{PNLT}(k)}{10} \right] - \text{PNLTM} - 13$$

where d is the duration time defined by the points corresponding to the values $\text{PNLTM} - 10$.

4.5.5 If in the procedures given in 4.5.2, the limits of $\text{PNLTM} - 10$ fall between the calculated $\text{PNLT}(k)$ values (the usual case), the $\text{PNLT}(k)$ values defining the limits of the duration interval shall be chosen from the $\text{PNLT}(k)$ values closest to $\text{PNLTM} - 10$. For those cases with more than one peak value of $\text{PNLT}(k)$, the applicable limits must be chosen to yield the largest possible value for the duration time.

4.6 Effective perceived noise level

The total subjective effect of an aircraft noise event, designated “effective perceived noise level”, EPNL, shall be equal to the algebraic sum of the maximum value of the tone corrected perceived noise level, PNLTM, and the duration correction D . That is:

$$\text{EPNL} = \text{PNLTM} + D$$

where PNLTM and D are calculated in accordance with the procedures given in 4.2, 4.3, 4.4 and 4.5.

4.7 Mathematical formulation of noy tables

4.7.1 The relationship between sound pressure level (SPL) and the logarithm of perceived noisiness is illustrated in Table A2-3 and Figure A2-3.

4.7.2 The important aspects of the mathematical formulation are:

- the slopes ($M(b)$, $M(c)$, $M(d)$ and $M(e)$) of the straight lines;
- the intercepts ($\text{SPL}(b)$ and $\text{SPL}(c)$) of the lines on the SPL axis; and
- the coordinates of the discontinuities, $\text{SPL}(a)$ and $\log n(a)$; $\text{SPL}(d)$ and $\log n = -1.0$; and $\text{SPL}(e)$ and $\log n = \log(0.3)$.

4.7.3 The equations are as follows:

- $\text{SPL} \geq \text{SPL}(a)$
 $n = \text{antilog} \{M(c) [\text{SPL} - \text{SPL}(c)]\}$
- $\text{SPL}(b) \leq \text{SPL} < \text{SPL}(a)$
 $n = \text{antilog} \{M(b) [\text{SPL} - \text{SPL}(b)]\}$
- $\text{SPL}(e) \leq \text{SPL} < \text{SPL}(b)$
 $n = 0.3 \text{ antilog}_{10} \{M(e) [\text{SPL} - \text{SPL}(e)]\}$

d) $SPL(d) \leq SPL < SPL(e)$
 $n = 0.1 \text{ antilog } \{M(d) [SPL - SPL(d)]\}$

4.7.4 Table A2-3 lists the values of the constants necessary to calculate perceived noisiness as a function of sound pressure level.

Table A2-3. Constants for mathematically formulated noy values

BAND (i)	f Hz	SPL (a)	SPL (b)	SPL (c)	SPL (d)	SPL (e)	M(b)	M(c)	M(d)	M(e)
1	50	91.0	64	52	49	55	0.043478	0.030103	0.079520	0.058098
2	63	85.9	60	51	44	51	0.040570	↑	0.068160	"
3	80	87.3	56	49	39	46	0.036831		"	0.052288
4	100	79.0	53	47	34	42	"	↓	0.059640	0.047534
5	125	79.8	51	46	30	39	0.035336		0.053013	0.043573
6	160	76.0	48	45	27	36	0.033333	↑	0.053013	"
7	200	74.0	46	43	24	33	"			0.040221
8	250	74.9	44	42	21	30	0.032051	↓	0.037349	0.037349
9	315	94.6	42	41	18	27	0.030675			0.030103
10	400	∞	40	40	16	25	0.030103	↑	0.053013	0.034859
11	500	↑	40	40	16	25	↑			
12	630		40	40	16	25		0.030103		
13	800		40	40	16	25		0.029960		
14	1 000		40	40	16	25		0.029960		
15	1 250		38	38	15	23		0.030103		
16	1 600		34	34	12	21		0.029960		
17	2 000		32	32	9	18		0.029960		
18	2 500		30	30	5	15		0.029960		
19	3 150		29	29	4	14		0.029960		
20	4 000		29	29	5	14		0.029960		
21	5 000	30	30	6	15	0.029960				
22	6 300	∞	31	31	10	17	0.029960	0.029960	0.068160	0.037349
23	8 000	44.3	37	34	17	23	0.042285	"	0.079520	"
24	10 000	50.7	41	37	21	29	"	"	0.059640	0.043573

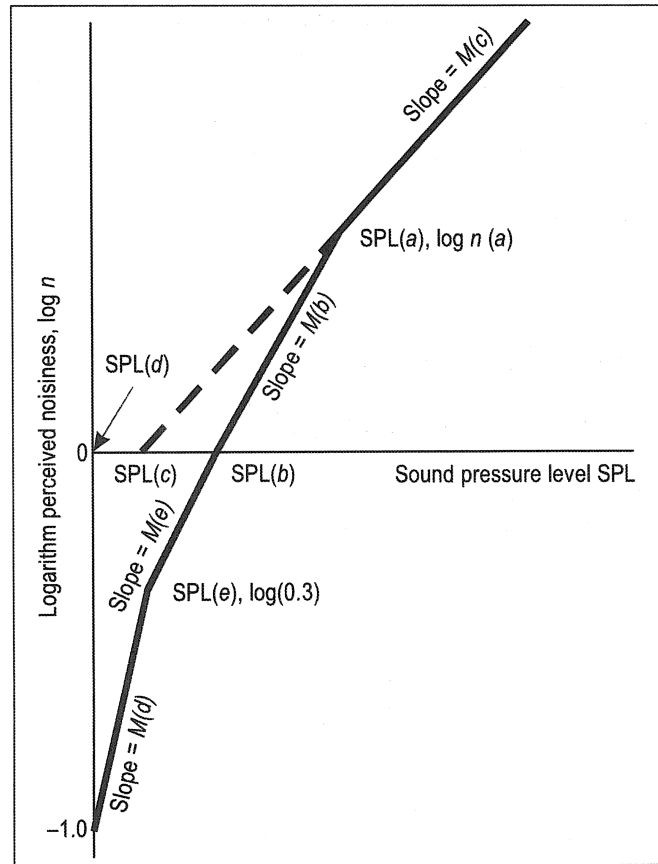


Figure A2-3. Perceived noisiness as a function of sound pressure level

5. REPORTING OF DATA TO THE CERTIFICATING AUTHORITY

5.1 General

5.1.1 Data representing physical measurements or corrections to measured data shall be recorded in permanent form and appended to the record.

5.1.2 All corrections shall be approved by the certificating authority. In particular the corrections to measurements for equipment response deviations shall be reported.

5.1.3 Estimates of the individual errors inherent in each of the operations employed in obtaining the final data shall be reported, if required.

5.2 Data reporting

5.2.1 Measured and corrected sound pressure levels shall be presented in one-third octave band levels obtained with equipment conforming to the Standards described in Section 3 of this appendix.

5.2.2 The type of equipment used for measurement and analysis of all acoustic performance and meteorological data shall be reported.

5.2.3 The following atmospheric environmental data, measured immediately before, after, or during each test at the observation points prescribed in Section 2 of this appendix shall be reported:

- a) air temperature and relative humidity;
- b) wind speeds and wind directions; and
- c) atmospheric pressure.

5.2.4 Comments on local topography, ground cover, and events that might interfere with sound recordings shall be reported.

5.2.5 The following information shall be reported:

- a) type, model and serial numbers (if any) of aircraft, engines, propellers or rotors (as applicable);
- b) gross dimensions of aircraft and location of engines and rotors (if applicable);
- c) aircraft gross mass for each test run and centre of gravity range for each series of test runs;
- d) aircraft configuration such as flap, air brakes and landing gear positions and propeller pitch angles (if applicable);
- e) whether auxiliary power units (APU), when fitted, are operating;
- f) conditions of pneumatic engine bleeds and engine power take-offs;
- g) indicated airspeed in kilometres per hour (knots);
- h)
 - 1) *for jet aeroplanes*: engine performance in terms of net thrust, engine pressure ratios, jet exhaust temperatures and fan or compressor shaft rotational speeds as determined from aeroplane instruments and manufacturer's data;
 - 2) *for propeller-driven aeroplanes*: engine performance in terms of brake horsepower and residual thrust or equivalent shaft horsepower or engine torque and propeller rotational speed as determined from aeroplane instruments and manufacturer's data;
 - 3) *for helicopters*: engine performance and rotor speed in rpm during each demonstration;
- i) aircraft flight path and ground speed during each demonstration; and
- j) any aircraft modifications or non-standard equipment likely to affect the noise characteristics of the aircraft and approved by the certifying authority.

5.3 Reporting of noise certification reference conditions

Aircraft position and performance data and the noise measurements shall be corrected to the noise certification reference conditions as specified in the relevant chapter of Part II, and these conditions, including reference parameters, procedures and configurations shall be reported.

5.4 Validity of results

5.4.1 Three average reference EPNL values and their 90 per cent confidence limits shall be produced from the test results and reported, each such value being the arithmetical average of the adjusted acoustical measurements for all valid test runs at the appropriate measurement point (take-off, approach, or lateral or overflight, in the case of helicopters). If more than one acoustic measurement system is used at any single measurement location, the resulting data for each test run shall be averaged as a single measurement. For helicopters, the three microphone test results for each flight should be averaged as a single measurement. The calculation shall be performed by:

- a) computing the arithmetic average for each flight phase using the values from each reference microphone point;
- b) computing the overall arithmetic average for each appropriate reference condition (take-off, overflight or approach) using the values in a) and the related 90 per cent confidence limits.

Note.— For helicopters a flight shall only be considered valid if simultaneous measurements are made at all three noise measurement locations.

5.4.2 The minimum sample size acceptable for each of the three certification measuring points for aeroplanes and for each set of three microphones for helicopters is six. The samples shall be large enough to establish statistically for each of the three average noise certification levels a 90 per cent confidence limit not exceeding ± 1.5 EPNdB. No test result shall be omitted from the averaging process unless otherwise specified by the certifying authority.

Note.— Methods for calculating the 90 per cent confidence interval are given in Appendix 1 of Doc 9501.

5.4.3 The average EPNL figures obtained by the foregoing process shall be those by which the noise performance of the aircraft is assessed against the noise certification criteria.

6. NOMENCLATURE: SYMBOLS AND UNITS

<i>Symbol</i>	<i>Unit</i>	<i>Meaning</i>
antilog	—	<i>Antilogarithm to the base 10.</i>
$C(k)$	dB	<i>Tone correction factor.</i> The factor to be added to PNL(k) to account for the presence of spectral irregularities such as tones at the k -th increment of time.
d	s	<i>Duration time.</i> The length of the significant noise time history being the time interval between the limits of $t(1)$ and $t(2)$ to the nearest 0.5 second.
D	dB	<i>Duration correction.</i> The factor to be added to PNLTM to account for the duration of the noise.
EPNL	EPNdB	<i>Effective perceived noise level.</i> The value of PNL adjusted for both the spectral irregularities and the duration of the noise. (The unit EPNdB is used instead of the unit dB.)
$f(i)$	Hz	<i>Frequency.</i> The geometrical mean frequency for the i -th one-third octave band.
$F(i,k)$	dB	<i>Delta-dB.</i> The difference between the original sound pressure level and the final broadband sound pressure level in the i -th one-third octave band at the k -th interval of time.
h	dB	<i>dB-down.</i> The level to be subtracted from PNLTM that defines the duration of the noise.

<i>Symbol</i>	<i>Unit</i>	<i>Meaning</i>
H	%	<i>Relative humidity.</i> The ambient atmospheric relative humidity.
i	—	<i>Frequency band index.</i> The numerical indicator that denotes any one of the 24 one-third octave bands with geometrical mean frequencies from 50 to 10 000 Hz.
k	—	<i>Time increment index.</i> The numerical indicator that denotes the number of equal time increments that have elapsed from a reference zero.
log	—	<i>Logarithm to the base 10.</i>
log $n(a)$	—	<i>Noy discontinuity coordinate.</i> The log n value of the intersection point of the straight lines representing the variation of SPL with log n .
$M(b), M(c)$, etc.	—	<i>Noy inverse slope.</i> The reciprocals of the slopes of straight lines representing the variation of SPL with log n .
n	noy	<i>Perceived noisiness.</i> The perceived noisiness at any instant of time that occurs in a specified frequency range.
$n(i,k)$	noy	<i>Perceived noisiness.</i> The perceived noisiness at the k -th instant of time that occurs in the i -th one-third octave band.
$n(k)$	noy	<i>Maximum perceived noisiness.</i> The maximum value of all of the 24 values of $n(i)$ that occurs at the k -th instant of time.
$N(k)$	noy	<i>Total perceived noisiness.</i> The total perceived noisiness at the k -th instant of time calculated from the 24 instantaneous values of $n(i,k)$.
$p(b), p(c)$, etc.	—	<i>Noy slope.</i> The slopes of straight lines representing the variation of SPL with log n .
PNL	PNdB	<i>Perceived noise level.</i> The perceived noise level at any instant of time. (The unit PNdB is used instead of the unit dB.)
PNL(k)	PNdB	<i>Perceived noise level.</i> The perceived noise level calculated from the 24 values of SPL(i,k) at the k -th increment of time. (The unit PNdB is used instead of the unit dB.)
PNLM	PNdB	<i>Maximum perceived noise level.</i> The maximum value of PNL(k). (The unit PNdB is used instead of the unit dB.)
PNLT	TPNdB	<i>Tone corrected perceived noise level.</i> The value of PNL adjusted for the spectral irregularities that occur at any instant of time. (The unit TPNdB is used instead of the unit dB.)
PNLT(k)	TPNdB	<i>Tone corrected perceived noise level.</i> The value of PNL(k) adjusted for the spectral irregularities that occur at the k -th increment of time. (The unit TPNdB is used instead of the unit dB.)
PNLTM	TPNdB	<i>Maximum tone corrected perceived noise level.</i> The maximum value of PNLT(k). (The unit TPNdB is used instead of the unit dB.)

<i>Symbol</i>	<i>Unit</i>	<i>Meaning</i>
$PNLT_r$	TPNdB	<i>Tone corrected perceived noise level</i> adjusted for reference conditions.
$s(i,k)$	dB	<i>Slope of sound pressure level.</i> The change in level between adjacent one-third octave band sound pressure levels at the i -th band for the k -th instant of time.
$\Delta s(i,k)$	dB	<i>Change in slope of sound pressure level.</i>
$s'(i,k)$	dB	<i>Adjusted slope of sound pressure level.</i> The change in level between adjacent adjusted one-third octave band sound pressure levels at the i -th band for the k -th instant of time.
$\bar{s}(i,k)$	dB	<i>Average slope of sound pressure level.</i>
SPL	dB re 20 μ Pa	<i>Sound pressure level.</i> The sound pressure level at any instant of time that occurs in a specified frequency range.
SPL(a)	dB re 20 μ Pa	<i>Noy discontinuity coordinate.</i> The SPL value of the intersection point of the straight lines representing the variation of SPL with $\log n$.
SPL(b) SPL(c)	dB re 20 μ Pa	<i>Noy intercept.</i> The intercepts on the SPL-axis of the straight lines representing the variation of SPL with $\log n$.
SPL(i,k)	dB re 20 μ Pa	<i>Sound pressure level.</i> The sound pressure level at the k -th instant of time that occurs in the i -th one-third octave band.
SPL'(i,k)	dB re 20 μ Pa	<i>Adjusted sound pressure level.</i> The first approximation to broadband sound pressure level in the i -th one-third octave band for the k -th instant of time.
SPL(i)	dB re 20 μ Pa	<i>Maximum sound pressure level.</i> The sound pressure level that occurs in the i -th one-third octave band of the spectrum for PNLTM.
SPL(i) _r	dB re 20 μ Pa	<i>Corrected maximum sound pressure level.</i> The sound pressure level that occurs in the i -th one-third octave band of the spectrum for PNLTM corrected for atmospheric sound absorption.
SPL''(i,k)	dB re 20 μ Pa	<i>Final broadband sound pressure level.</i> The second and final approximation to broadband sound pressure level in the i -th one-third octave band for the k -th instant of time.
t	s	<i>Elapsed time.</i> The length of time measured from a reference zero.
t_1, t_2	s	<i>Time limit.</i> The beginning and end, respectively, of the significant noise time history defined by h .
Δt	s	<i>Time increment.</i> The equal increments of time for which PNL(k) and PNL(k) are calculated.
T	s	<i>Normalizing time constant.</i> The length of time used as a reference in the integration method for computing duration corrections, where $T = 10$ s.
t (°C)	°C	<i>Temperature.</i> The ambient atmospheric temperature.

Symbol	Unit	Meaning
$\alpha(i)$	dB/100 m	<i>Test atmospheric absorption.</i> The atmospheric attenuation of sound that occurs in the i -th one-third octave band for the measured atmospheric temperature and relative humidity.
$\alpha(i)_0$	dB/100 m	<i>Reference atmospheric absorption.</i> The atmospheric attenuation of sound that occurs in the i -th one-third octave band for a reference atmospheric temperature and relative humidity.
A_1	degrees	<i>First constant* climb angle.</i>
A_2	degrees	<i>Second constant** climb angle.</i>
δ	degrees	<i>Thrust cutback angles.</i> The angles defining the points on the take-off flight path at which thrust reduction is started and ended, respectively.
ϵ	degrees	
η	degrees	<i>Approach angle.</i>
η_r	degrees	<i>Reference approach angle.</i>
θ	degrees	<i>Noise angle (relative to flight path).</i> The angle between the flight path and noise path. It is identical for both measured and corrected flight paths.
ψ	degrees	<i>Noise angle (relative to ground).</i> The angle between the noise paths and the ground. It is identified for both measured and corrected flight paths.
μ	degrees	<i>Engine noise emission parameter.</i> (See 9.3.4.)
Δ_1	EPNdB	<i>PNLT correction.</i> The correction to be added to the EPNL calculated from measured data to account for noise level changes due to differences in atmospheric absorption and noise path length between reference and test conditions.
Δ_2	EPNdB	<i>Adjustment to duration correction.</i> The adjustment to be made to the EPNL calculated from measured data to account for noise level changes due to the noise duration between reference and test conditions.
Δ_3	EPNdB	<i>Source noise adjustment.</i> The adjustment to be made to the EPNL calculated from measured data to account for noise level changes due to differences between reference and test engine regime.

* Gear up, speed of at least $V_2 + 19$ km/h ($V_2 + 10$ kt), take-off thrust.

** Gear up, speed of at least $V_2 + 19$ km/h ($V_2 + 10$ kt), after cutback.

7. SOUND ATTENUATION IN AIR

7.1 The atmospheric attenuation of sound shall be determined in accordance with the procedure presented below.

7.2 The relationship between sound attenuation, frequency, temperature and humidity is expressed by the following equations:

$$\alpha(i) = 10^{[2.05 \log (f_o/1000) + 1.1394 \times 10^{-3} \theta - 1.916984]} + \eta(\delta) \times 10^{[\log (f_o) + 8.42994 \times 10^{-3} \theta - 2.755624]}$$

$$\delta = \sqrt{\frac{1010}{f_o}} 10^{(\log H - 1.328924 + 3.179768 \times 10^{-2} \theta)} \times 10^{(-2.173716 \times 10^{-4} \theta^2 + 1.7496 \times 10^{-6} \theta^3)}$$

where:

$\eta(\delta)$ is given by Table A2-4 and f_o by Table A2-5;

$\alpha(i)$ being the attenuation coefficient in dB/100 m;

θ being the temperature in °C; and

H being the relative humidity expressed as a percentage.

7.3 The equations given in 7.2 are convenient for calculation by means of a computer.

Table A2-4. Values of $\eta(\delta)$

δ	$\eta(\delta)$	δ	$\eta(\delta)$
0.00	0.000	2.50	0.450
0.25	0.315	2.80	0.400
0.50	0.700	3.00	0.370
0.60	0.840	3.30	0.330
0.70	0.930	3.60	0.300
0.80	0.975	4.15	0.260
0.90	0.996	4.45	0.245
1.00	1.000	4.80	0.230
1.10	0.970	5.25	0.220
1.20	0.900	5.70	0.210
1.30	0.840	6.05	0.205
1.50	0.750	6.50	0.200
1.70	0.670	7.00	0.200
2.00	0.570	10.00	0.200
2.30	0.495		

Table A2-5. Value of f_o

Centre frequency of the 1/3 octave band (Hz)		Centre frequency of the 1/3 octave band (Hz)	
	f_o (Hz)		f_o (Hz)
50	50	800	800
63	63	1 000	1 000
80	80	1 250	1 250
100	100	1 600	1 600
125	125	2 000	2 000
160	160	2 500	2 500
200	200	3 150	3 150
250	250	4 000	4 000
315	315	5 000	4 500
400	400	6 300	5 600
500	500	8 000	7 100
630	630	10 000	9 000

A term of quadratic interpolation shall be used where necessary.

8. ADJUSTMENT OF HELICOPTER FLIGHT TEST RESULTS

8.1 General

8.1.1 Adjustments shall be made to the measured noise data by the methods of this section. Compliance with the test conditions of Chapter 8, 8.7.5, is necessary for the test to be acceptable. Adjustments shall be made for differences between test and reference flight procedures and shall account for differences in the following:

- a) helicopter flight path and velocity relative to the flight path reference point;
- b) sound attenuation in air;
- c) in the overflight case, parameters affecting the noise generating mechanisms such as those described in 8.5.

8.1.2 Adjustments to the measured noise data shall be made using the methods prescribed in 8.3 and 8.4, for differences in the following:

- a) attenuation of the noise along its path as affected by “inverse square” and atmospheric attenuation;
- b) duration of the noise as affected by distance and speed of aircraft relative to the flight path reference point;
- c) the adjustment procedure described in this section shall apply to the lateral microphones in the take-off, overflight and approach cases. Although the noise emission is strongly dependent on the directivity pattern, variable from one helicopter type to another, the propagation angle θ , defined in Appendix 2, 9.3.2, Figure A2-11, shall be the same for the test and reference flight paths. The elevation angle Ψ shall not be constrained as in the third note of Appendix 2, 9.3.2, but must be determined and reported. The certification authority shall specify the acceptable limitations on Ψ . Corrections to data obtained when these limits are exceeded shall be applied using procedures approved by the certifying authority. In the particular case of lateral noise measurement, sound propagation is affected not only by “inverse square” and atmospheric attenuation, but also by ground absorption and reflection effects which depend mainly on the angle Ψ .

Note 1.— Chapter 8, 8.7.5, in Part II places limits on the maximum adjustments that may be made between test and reference flight procedures and conditions.

Note 2.— Adjustments of noise levels for test to reference conditions may be made, subject to agreement by the certifying authority, by the methods of this section. The corrections are derived from sets of curves linking the instant at which the PNLTM is emitted for each reference procedure with appropriate parameters. The sensitivity curves provide noise level variations as a function of the parameter for which a correction is necessary.

8.2 Flight profiles

Note.— Flight profiles for the test conditions are described by their geometry relative to the ground, together with the associated helicopter speed.

8.2.1 Take-off profile

Note 1.— Figure A2-4 illustrates typical test and reference profiles.

- a) *During actual testing the helicopter is initially stabilized in level flight at the best rate of climb speed, V_y , at a point A and continues to a point B where take-off power is applied and a steady climb is initiated. A steady climb shall be maintained throughout the 10 dB-down period and beyond to the end of the certification flight path (point F).*

- b) Position K_1 is the take-off flight path reference point and NK_1 is the distance from the initiation of the steady climb to the take-off flight path reference point. Positions K_1' and K_1'' are associated noise measurement points located on a line at right angles to and at the specified distance from the take-off flight track TM.
- c) The distance TM is the distance over which the helicopter position is measured and synchronized with the noise measurements (see 2.3.2 of this appendix).

Note 2.— The position of point B may vary within the limits allowed by the certificating authority.

8.2.2 Overflight profile

Note.— Figure A2-5 illustrates a typical overflight profile.

- a) The helicopter is stabilized in level flight at point D and flies through point W, overhead the flight path reference point, to point E, the end of the noise certification overflight flight path.
- b) Position K_2 is the overflight flight path reference point and K_2W is the height of the helicopter overhead the overflight flight path reference point. Positions K_2' and K_2'' are associated noise measurement points located on a line at right angles to and at the specified distance from the overflight flight track RS.
- c) The distance RS is the distance over which the helicopter position is measured and synchronized with the noise measurements (see 2.3.2 of this appendix).

8.2.3 Approach profile

Note.— Figure A2-6 illustrates a typical approach profile.

- a) The helicopter is initially stabilized at the specified approach path angle at point G and continues through point H, point I and then to touchdown.
- b) Position K_3 is the approach flight path reference point and K_3H is the height of the helicopter overhead the approach flight path reference point. Positions K_3' and K_3'' are associated noise measurement locations on a line at right angles to and at the specified distance from the approach flight path track PU.
- c) The distance PU is the distance over which the helicopter position is measured and synchronized with the noise measurements (see 2.3.2 of this appendix).

8.3 Adjustments of PNL and PNLT

Note.— The portions of the test flight path and reference flight path which are significant for the EPNL calculation are illustrated in Figure A2-7 for take-off, overflight and approach measurements.

- a) XY represents the useful portion of the measured flight path and X_rY_r that of the corresponding reference flight path.
- b) Q represents the helicopter position on the measured flight path at which the noise was emitted and observed as PNLTM at the noise measuring point K. Q_r is the corresponding position on the reference flight path and K_r the reference noise measuring point. QK and Q_rK_r are respectively the measured and reference noise propagation paths, Q_r being located on the assumption that QK and Q_rK_r form the same angle θ with their respective flight paths.

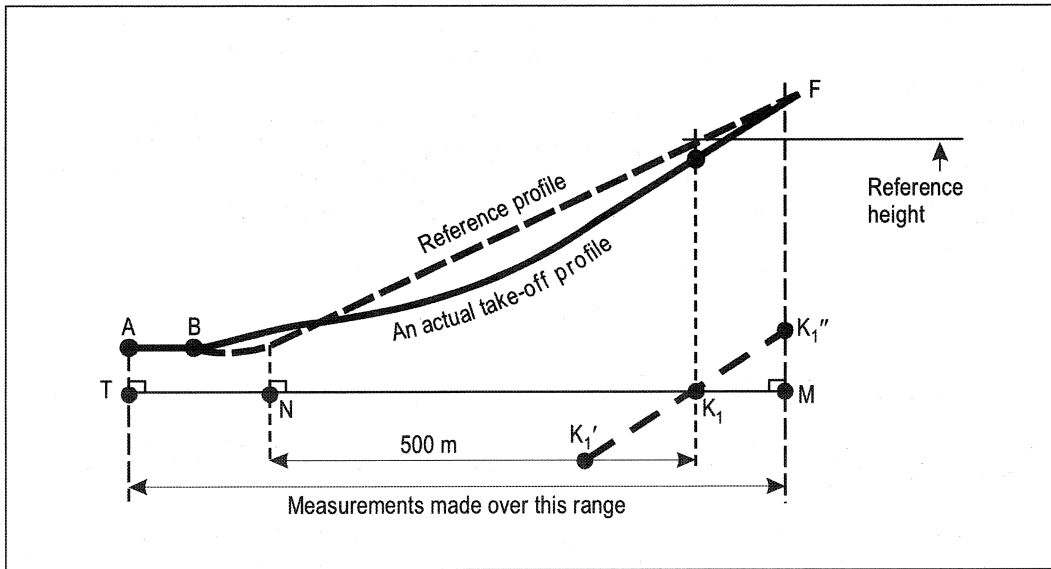


Figure A2-4. Typical test and reference profiles

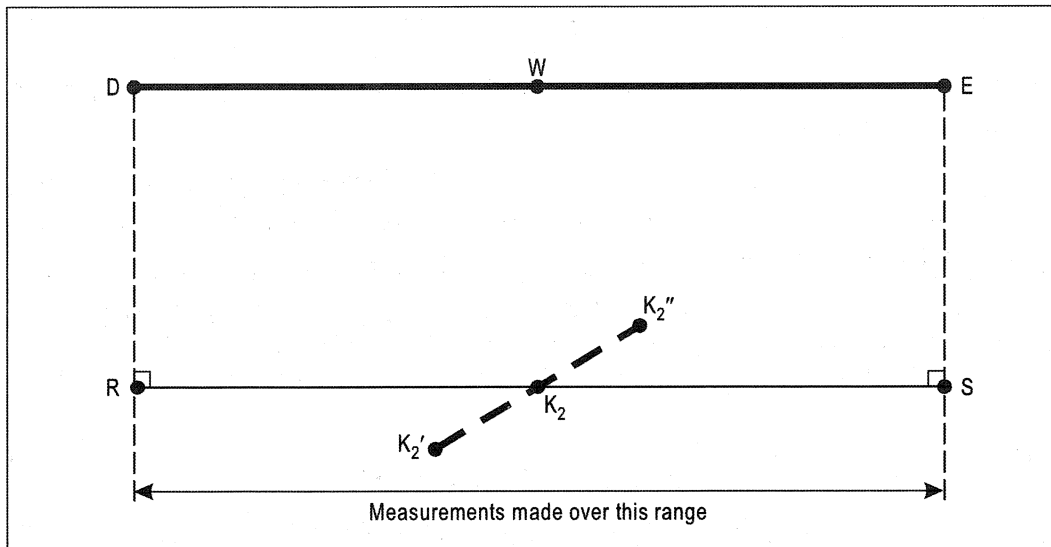


Figure A2-5. Typical overflight profile

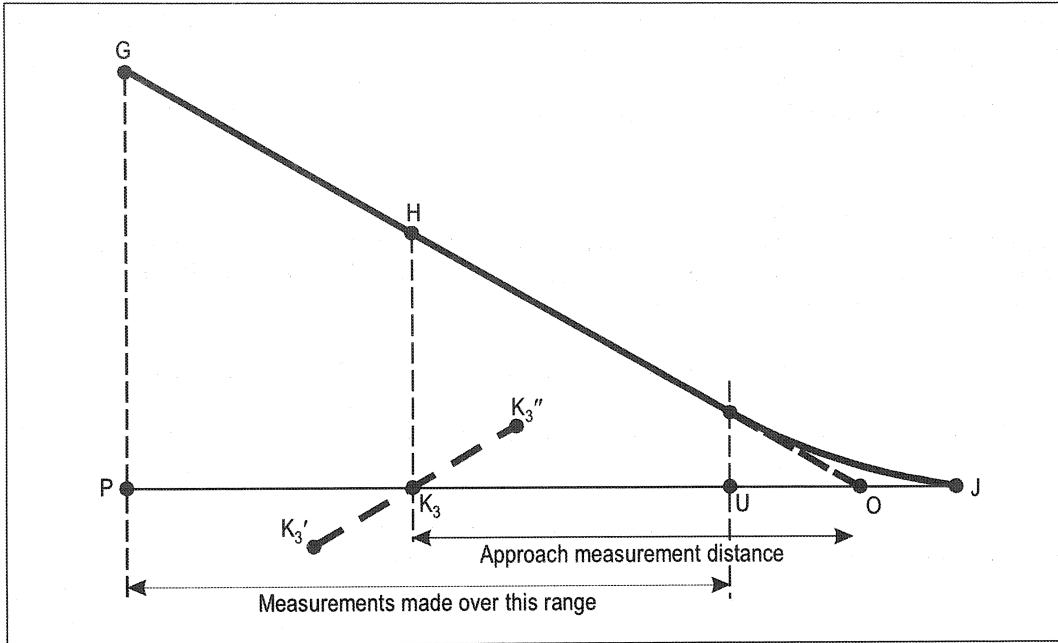


Figure A2-6. Typical approach profile

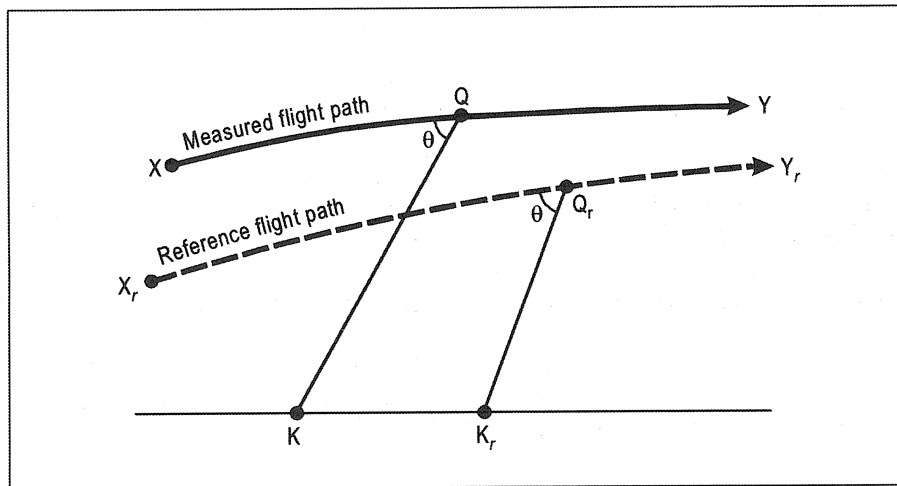


Figure A2-7. Profile characteristics influencing sound level

8.3.1 The one-third octave band levels $SPL(i)$ comprising PNL (the PNL at the moment of PNLTM observed at K) shall be adjusted to reference levels $SPL(i)_r$, as follows:

$$SPL(i)_r = SPL(i) + 0.01 [\alpha(i) - \alpha(i)_o] QK + 0.01 \alpha(i)_o (QK - Q_r K_r) + 20 \log (QK/Q_r K_r)$$

In this expression:

- the term $0.01 [\alpha(i) - \alpha(i)_o] QK$ accounts for the effect of the change in sound attenuation coefficient, and $\alpha(i)$ and $\alpha(i)_o$ are the coefficients for the test and reference atmospheric conditions respectively, obtained from Section 7 of this appendix;
- the term $0.01 \alpha(i)_o (QK - Q_r K_r)$ accounts for the effect of the change in the noise path length on the sound attenuation;
- the term $20 \log (QK/Q_r K_r)$ accounts for the effect of the change in the noise path length due to the “inverse square” law;
- QK and $Q_r K_r$ are measured in metres and $\alpha(i)$ and $\alpha(i)_o$ are in dB/100 m.

8.3.2 The corrected values $SPL(i)_r$ shall be converted to $PNLT_r$, and a correction term calculated as follows:

$$\Delta_1 = PNL T_r - PNL TM$$

8.3.3 Δ_1 shall be added algebraically to the EPNL calculated from the measured data.

8.3.4 If, during a test flight, several peak values of PNL T are observed which are within 2 dB of PNL TM, the procedure defined in 8.3.1, 8.3.2 and 8.3.3 shall be applied at each peak, and the adjustment term so calculated shall be added to each peak to give corresponding adjusted peak values of PNL T. If these peak values exceed that at the moment of PNL TM, the maximum value of such excess shall be added as a further adjustment to the EPNL calculated from the measured data.

8.4 Adjustments to duration correction

8.4.1 Whenever the measured flight paths and/or the ground velocities in the test conditions differ from the reference flight paths and/or the ground velocities in the reference conditions, duration adjustments shall be applied to the EPNL values calculated from the measured data. The adjustments shall be calculated as described below.

8.4.2 Referring to the flight path shown in Figure A2-7, the adjustment term shall be calculated as follows:

$$\Delta_2 = -7.5 \log (QK/Q_r K_r) + 10 \log (V/V_r)$$

which represents the adjustment to be added algebraically to the EPNL calculated from the measured data.

8.5 Correction of noise at source

For overflight, if any combination of the following three factors:

- a) airspeed deviations from reference;
- b) rotor speed deviations from reference;
- c) temperature deviations from reference;

results in an agreed noise correlating parameter whose value deviates from the reference value of this parameter, then source noise adjustments shall be determined from manufacturer's data approved by the certificating authority. This correction should normally be made using a sensitivity curve of PNLTM versus advancing blade tip Mach number; however, the correction may be made using an alternative parameter, or parameters, approved by the certificating authority.

Note 1.— If it is not possible to attain the reference value of advancing blade tip Mach number or the agreed reference noise correlating parameter, then an extrapolation of the sensitivity curve is permitted providing that the data cover a range of values of the noise correlating parameter agreed by the certificating authority between test and reference conditions. The advancing blade tip Mach number or agreed noise correlating parameter shall be computed from as measured data. A separate curve of source noise versus advancing blade tip Mach number or another agreed noise correlating parameter shall be derived for each of the three certification microphone locations, centre line, sideline left and sideline right, defined relative to the direction of flight on each test run.

Note 2.— When using advancing blade tip Mach number it should be computed using true airspeed, on-board outside air temperature (OAT), and rotor speed.

8.6 Flight path identification positions and parameters

8.6.1 General

<i>Position/ parameter</i>	<i>Description</i>
K	Noise measurement point.
K_r	Reference measurement point.
V	Helicopter test ground speed.
V_r	Helicopter reference ground speed.
V_H	Maximum speed in level flight at power not exceeding maximum continuous power.
V_{NE}	Never exceed speed.
V_y	Speed for best rate of climb.

8.6.2 Take-off (see Figure A2-4)

<i>Position</i>	<i>Description</i>
A	Start of noise certification take-off flight path.
B	Start of transition to climb.
F	End of noise certification take-off flight path.
K_1	Take-off flight path reference point.
K_1', K_1''	Associated noise measurement points (of 3-microphone array).

M	End of noise certification take-off flight track.
N	Point on ground vertically below start of transition to climb.
T	Start of noise certification take-off flight track, point on ground vertically below A.

8.6.3 Overflight (see Figure A2-5)

<i>Position</i>	<i>Description</i>
D	Start of noise certification overflight flight path.
E	End of noise certification overflight flight path.
K ₂	Overflight flight path reference point.
K ₂ ', K ₂ ''	Associated noise measurement points (of 3-microphone array).
R	Start of noise certification overflight flight track.
S	End of noise certification overflight flight track.

8.6.4 Approach (see Figure A2-6)

<i>Position</i>	<i>Description</i>
G	Start of noise certification approach flight path.
H	Position on approach path vertically above approach flight path reference point.
I	End of noise certification approach flight path.
J	Touchdown.
K ₃	Approach flight path reference point.
K ₃ ', K ₃ ''	Associated noise measurement points (of 3-microphone array).
O	Intersection of the approach path with the ground plane.
P	Start of noise certification approach flight track.
U	Point on ground vertically below start of flare.

8.7 Flight path distance

<i>Distance</i>	<i>Unit</i>	<i>Meaning</i>
NK ₁	metres	<i>Take-off measurement distance.</i> The distance from start of transition to climb to the take-off flight path reference point.
TM	metres	<i>Take-off flight track distance.</i> The distance over which the position of the helicopter is to be recorded.
K ₂ W	metres (feet)	<i>Helicopter overflight height.</i> The height of the helicopter above the overflight flight reference point.
RS	metres	<i>Overflight flight track distance.</i> The distance over which the position of the helicopter is to be recorded.
K ₃ H	metres (feet)	<i>Helicopter approach height.</i> The height of the helicopter above the approach flight reference point.
OK ₃	metres	<i>Approach measurement distance.</i> The distance from the intersection of the approach path with the ground plane to the approach flight path reference point.
PU	metres	<i>Approach flight track distance.</i> The distance over which the position of the aircraft is to be recorded.
QK	metres	<i>Measured noise path.</i> The distance from the measured helicopter position Q to the noise measurement position K.
Q _r K _r	metres	<i>Reference noise path.</i> The distance from the reference helicopter position Q _r to the reference noise measurement position K _r .

9. ADJUSTMENT OF AEROPLANE FLIGHT TEST RESULTS

9.1 When certification test conditions are not identical to reference conditions, appropriate adjustments shall be made to the measured noise data by the methods of this section.

Note.— Differences between test and reference conditions result in differences in the following:

- a) *aeroplane flight path and velocity relative to measurement point;*
- b) *sound attenuation in air;*
- c) *parameters affecting engine-noise generating mechanisms.*

9.1.1 Adjustments to the measured noise values shall be made by one of the methods described in 9.3 and 9.4 for differences in the following:

- a) *attenuation of the noise along its path as affected by “inverse square” and atmospheric attenuation;*
- b) *duration of the noise as affected by distance and speed of aeroplane relative to measuring point;*
- c) *source noise emitted by engine as affected by the relevant parameters;*

- d) aeroplane/engine source noise as affected by large differences between test and reference airspeeds. In addition to the effect on duration, the effects of airspeed on component noise sources can also become significant and must be considered; for conventional aeroplane configurations, when differences between test and reference airspeeds exceed 28 km/h (15 kt) true airspeed, test data and/or analysis approved by the certifying authority shall be used to quantify effects of airspeed adjustment on resulting certification noise levels.

9.1.2 The “integrated” method described in 9.4 shall be used on flyover or approach under the following conditions:

- a) when the amount of the adjustments (using the “simplified” method) is greater than 8 dB on flyover, or 4 dB on approach; or
- b) when the resulting final EPNL value on flyover or approach (using the “simplified” method) is within 1 dB of the limited noise levels as prescribed in 3.4 of Part II, Chapter 3.

Note.— See also Part II, Chapter 3, 3.7.6.

9.2 Flight profiles

Note.— Flight profiles for both test and reference conditions are described by their geometry relative to the ground, together with the associated aircraft speed relative to the ground, and the associated engine control parameter(s) used for determining the noise emission of the aeroplane.

9.2.1 Take-off profile

Note.— Figure A2-8 illustrates a typical take-off profile.

- a) The aeroplane begins the take-off roll at point A, lifts off at point B and begins its first climb at constant angle at point C. Where thrust or power (as appropriate) cutback is used, it is started at point D and completed at point E. From here the aeroplane begins a second climb at constant angle up to point F, the end of the noise certification take-off flight path.
- b) Position K_1 is the take-off noise measuring station and AK_1 is the distance from start of roll to the flyover noise measuring point. Position K_2 is the lateral noise measuring station located on a line parallel to and the specified distance abeam the runway centre line where the noise level during take-off is greatest.
- c) The distance AF is the distance over which the aeroplane position is measured and synchronized with the noise measurements (see 2.3.2 of this appendix).

9.2.2 Approach profile

Note.— Figure A2-9 illustrates a typical approach profile.

- a) The aeroplane begins its noise certification approach flight path at point G and touches down on the runway at point J, and at a distance OJ from the threshold.
- b) Position K_3 is the approach noise measuring station and K_3O is the distance from the approach noise measurement point to the threshold.
- c) The distance GI is the distance over which the aeroplane position is measured and synchronized with the noise measurements (see 2.3.2 of this appendix).

The aeroplane reference point during approach measurements shall be the ILS antenna.

9.3 “Simplified” method of adjustment

9.3.1 General

Note.— The “simplified” adjustment method consists of applying adjustments to the EPNL calculated from the measured data for the differences between measured and reference conditions at the moment of PNLTM.

9.3.2 Adjustments to PNL and PNL T

Note 1.— The portions of the test flight path and the reference flight path which are significant for the EPNL calculation are illustrated in Figure A2-10 for the flyover and approach noise measurements.

- a) XY represents the useful portion of the measured flight path, and $X_r Y_r$, that of the corresponding reference flight path.
- b) Q represents the aeroplane position on the measured flight path at which the noise was emitted and observed as PNLTM at the noise measuring station K. Q_r is the corresponding position on the reference flight path and K_r the reference measuring station. QK and $Q_r K_r$ are respectively the measured and reference noise propagation paths, Q_r being found from the assumption that QK and $Q_r K_r$ form the same angle θ with their respective flight paths.

Note 2.— The portions of test flight path and reference flight path which are significant for the EPNL calculation are illustrated in Figures A2-11 a) and b) for the lateral noise measurements.

- a) XY represents the useful portion of the measured flight path (Figure A2-11 a)), and $X_r Y_r$, that of the corresponding reference flight path (Figure A2-11 b)).
- b) Q represents the aeroplane position on the measured flight path at which the noise was emitted and observed as PNLTM at the noise measuring station K. Q_r is the corresponding position on the reference flight path and K_r the reference measuring station. QK and $Q_r K_r$ are respectively the measured and reference noise propagation paths. In this case K_r is only specified as being on a particular lateral line; K_r and Q_r are therefore found from the assumptions that QK and $Q_r K_r$:
 - 1) form the same angle θ with their respective flight paths, and
 - 2) form the same angle ψ with the ground.

Note 3.— In the particular case of lateral noise measurement, sound propagation is affected not only by “inverse square” and atmospheric attenuation, but also by ground absorption and reflection effects which depend mainly on the angle ψ .

9.3.2.1 The one-third octave band levels $SPL(i)$ comprising PNL (the PNL at the moment of PNLTM observed at K) shall be adjusted to reference levels $SPL(i)_r$, as follows:

$$SPL(i)_r = SPL(i) + 0.01 [\alpha(i) - \alpha(i)_o] QK + 0.01 \alpha(i)_o (QK - Q_r K_r) + 20 \log (QK/Q_r K_r)$$

In this expression:

- the term $0.01 [\alpha(i) - \alpha(i)_o] QK$ accounts for the effect of the change in sound attenuation coefficient, and $\alpha(i)$ and $\alpha(i)_o$ are the coefficients for the test and reference atmospheric conditions respectively, obtained from Section 7;

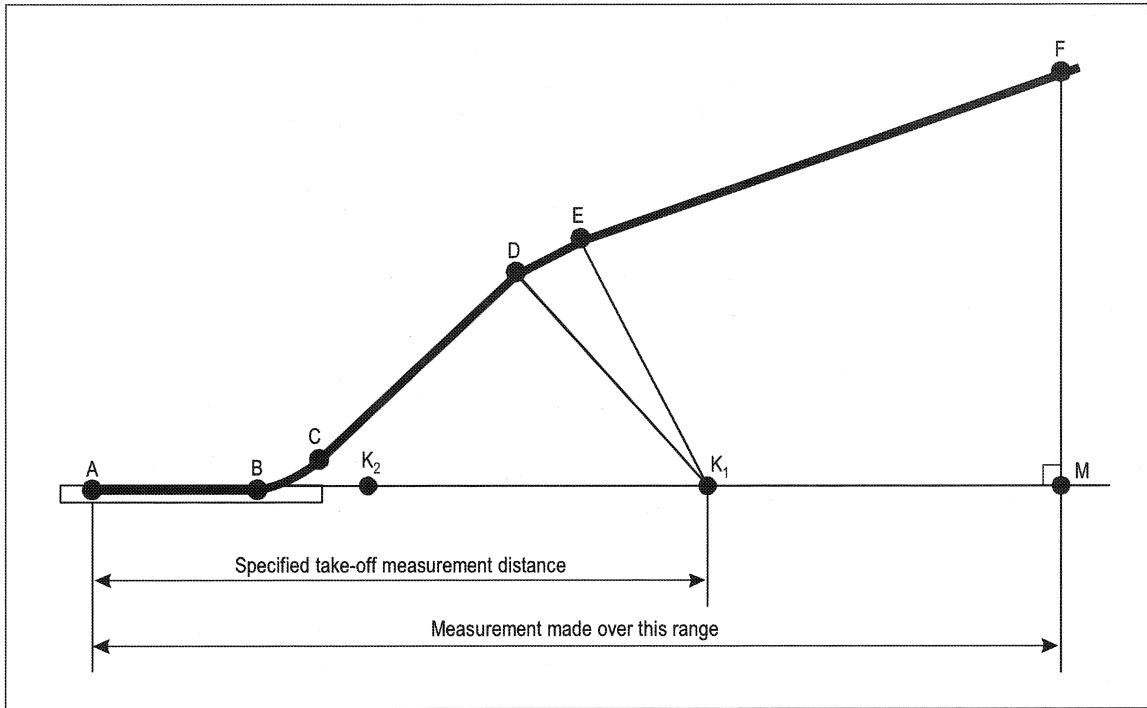


Figure A2-8. Typical take-off profile

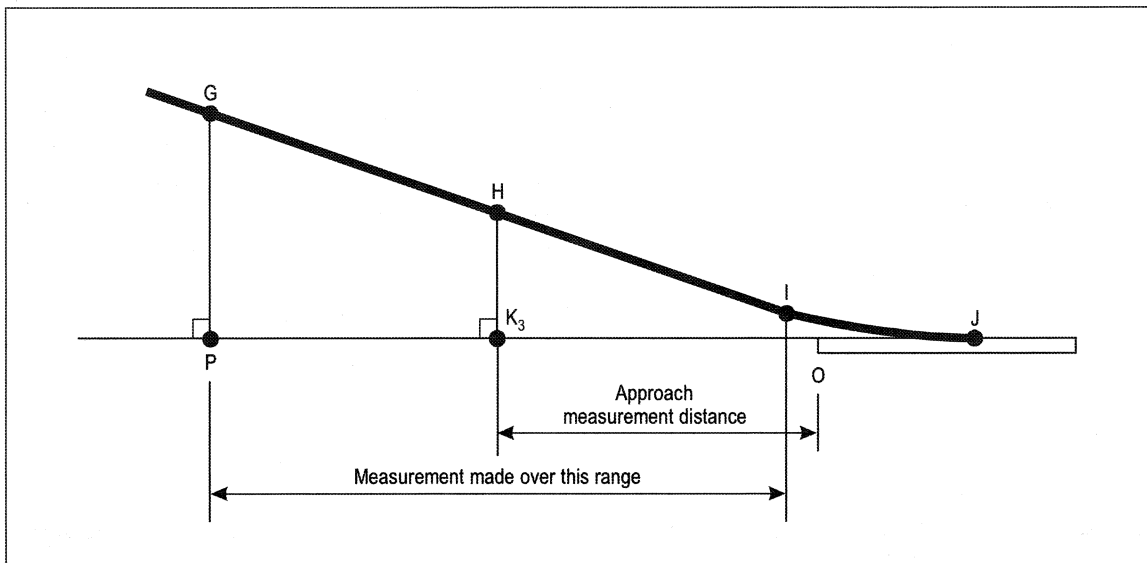


Figure A2-9. Typical approach profile

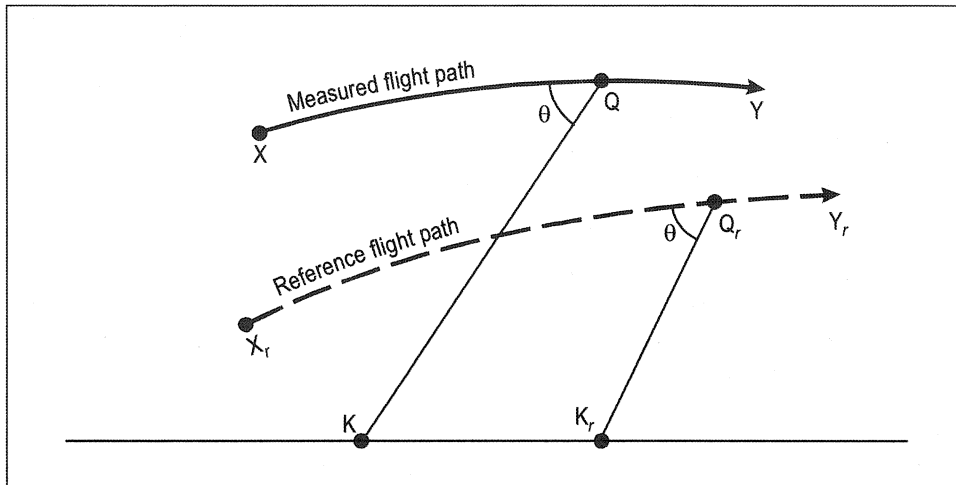


Figure A2-10. Profile characteristics influencing sound level

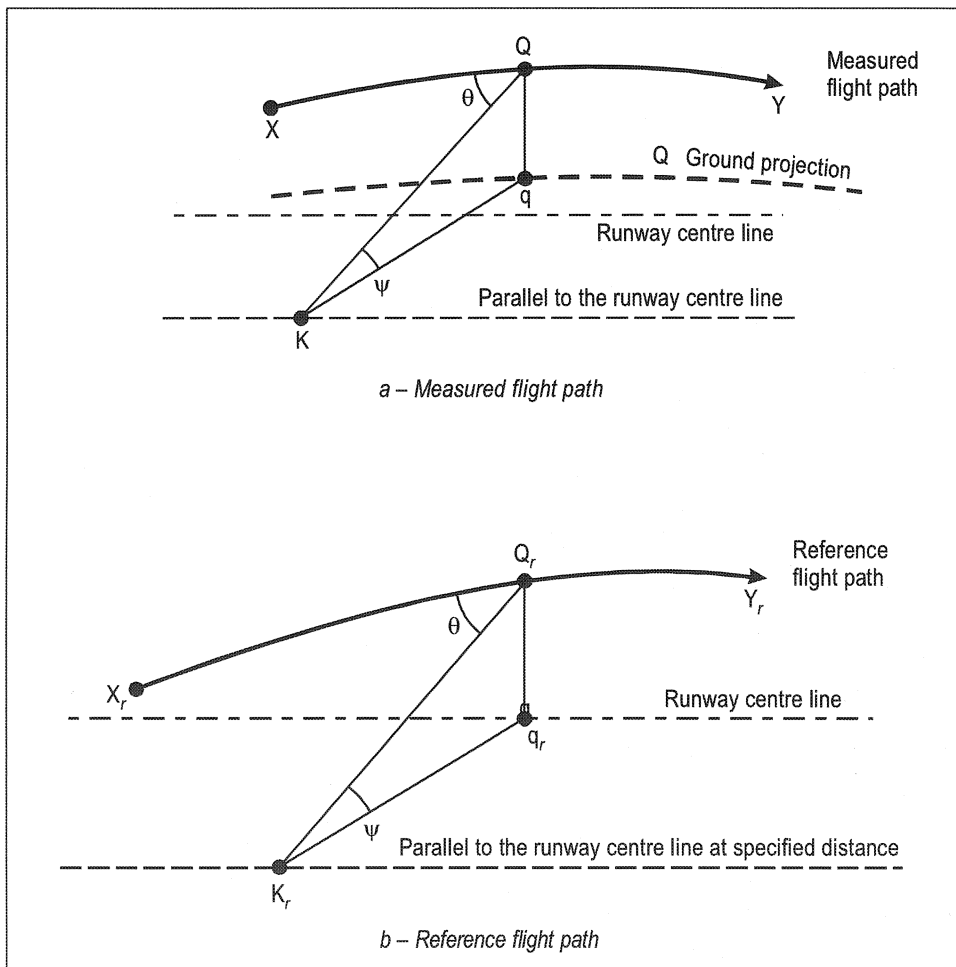


Figure A2-11. Lateral measurement — determination of reference station

- the term $0.01 \alpha(i)_o (QK - Q_r K_r)$ accounts for the effect of the change in the noise path length on the sound attenuation;
- the term $20 \log (QK/Q_r K_r)$ accounts for the effect of the change in the noise path length due to the “inverse square” law;
- QK and $Q_r K_r$ are measured in metres and $\alpha(i)$ and $\alpha(i)_o$ are in dB/100 m.

9.3.2.1.1 The corrected values $SPL(i)_r$ shall be converted to $PNLT_r$, and a correction term calculated as follows:

$$\Delta_1 = PNL T_r - PNL T M$$

9.3.2.1.2 Δ_1 shall be added algebraically to the EPNL calculated from the measured data.

9.3.2.2 If, during a test flight, several peak values of PNL T are observed which are within 2 dB of PNL T M, the procedure defined in 9.3.2.1 shall be applied at each peak, and the adjustment term calculated as in 9.3.2.1 shall be added to each peak to give corresponding adjusted peak values of PNL T. If these peak values exceed that at the moment of PNL T M, the maximum value of such exceedance shall be added as a further adjustment to the EPNL calculated from the measured data.

9.3.3 Adjustments to duration correction

9.3.3.1 Whenever the measured flight paths and/or the ground velocities in the test conditions differ from the reference flight paths and/or the ground velocities in the reference conditions, duration adjustments shall be applied to the EPNL values calculated from the measured data. The adjustments shall be calculated as described below.

9.3.3.2 Referring to the flight path shown in Figure A2-10, the adjustment term shall be calculated as follows:

$$\Delta_2 = -7.5 \log (QK/Q_r K_r) + 10 \log (V/V_r)$$

which represents the adjustment to be added algebraically to the EPNL calculated from the measured data.

9.3.4 Source noise adjustments

9.3.4.1 The source noise adjustment shall be applied to take account of differences between the parameters affecting engine noise measured in the certification flight tests and those calculated or specified in the reference conditions. The adjustment shall be determined from manufacturers' data approved by the certificating authority.

Note.— Typical data are illustrated in Figure A2-12 which shows a curve of EPNL versus the engine control parameter μ , the EPNL data being corrected to all the other relevant reference conditions (aeroplane mass, speed and altitude, air temperature) and for the difference in noise between the installed engine and the flight manual standard of engine at each value of μ . Data of this type are required around the values of μ used for lateral, flyover and approach noise measurements.

9.3.4.2 The adjustment term Δ_3 shall be obtained by subtracting the EPNL value corresponding to the parameter μ from the EPNL value corresponding to the parameter μ_r and shall be added algebraically to the EPNL value calculated from the measured data.

Note.— See Figure A2-12 in which μ is the value of the engine control parameter in the flight test conditions, μ_r is the corresponding value in the reference conditions.

9.3.5 Symmetry adjustments

For the lateral noise, a symmetry adjustment shall be made (see Part II, Chapter 3, 3.3.2.2) as follows:

- a) if the symmetrical measurement point is opposite the point where the highest noise level is obtained on the main lateral measurement line, the certification noise level shall be the (arithmetical) mean of the noise levels measured at these two points (see Figure A2-13 a));
- b) if not, it shall be assumed that the variation of noise with the altitude of the aeroplane is the same on both sides (i.e. there is a constant difference between the lines of noise versus altitude on the two sides). (See Figure A2-13 b)). The certification noise level shall then be the maximum value of the mean between these lines.

9.4 “Integrated” method of adjustment

9.4.1 General

Note.— The “integrated” adjustment method consists of recomputing under reference conditions points on the PNLT time history corresponding to measured points obtained during the tests, and computing EPNL directly for the new time history obtained in this way. The main principles are described below.

9.4.2 PNLT computations

Note 1.— The portions of the test flight path and the reference profile which are significant for the EPNL computation are illustrated in Figure A2-14 for the flyover, full-power and approach noise measurements.

- a) *XY represents the useful portion of the measured flight path and $X_r Y_r$ that of the corresponding reference flight path.*
- b) *The points Q_0 , Q_1 , Q_n represent aeroplane positions on the measured flight path at time t_0 , t_1 and t_n respectively. Consider the point Q_1 at which the noise was emitted and observed as one-third octave values $SPL(i)_1$ at the noise measuring station K at time t_1 . The point Q_{r1} represents the corresponding position on the reference flight path for noise observed as $SPL(i)_{r1}$ at the reference measuring station K_r at time t_{r1} . $Q_1 K$ and $Q_{r1} K_r$ are respectively the measured and reference noise propagation paths which in each case form the angle θ_1 with their respective flight paths. Q_{r0} and Q_{rn} are similarly the points on the reference flight path corresponding to Q_0 and Q_n on the measured flight path. Q_0 and Q_n are chosen so that between Q_{r0} and Q_{rn} all values of $PNLT_r$ (computed and described below) within 10 dB of the peak value are included.*

Note 2.— The portions of the test flight path and the reference profile which are significant for the EPNL computation are illustrated in Figures A2-15 a) and b) for the lateral noise measurements.

- a) *XY represents the useful portion of the measured flight path and $X_r Y_r$ that of the corresponding reference flight path.*
- b) *The points Q_0 , Q_1 , Q_n represent aeroplane positions on the measured flight path at time t_0 , t_1 and t_n respectively. Consider the point Q_1 at which the noise was emitted and observed as one-third octave values $SPL(i)_1$ at the noise measuring station K at time t_1 . The point Q_{r1} represents the corresponding position on the reference flight path for noise observed as $SPL(i)_{r1}$ at the measuring station K_r at time t_{r1} . $Q_1 K$ and $Q_{r1} K_r$ are respectively the measured and reference noise propagation paths. Q_{r0} and Q_{rn} are similarly the points on the reference flight path corresponding to Q_0 and Q_n on the measured flight path. Q_0 and Q_n are chosen so that between Q_{r0} and Q_{rn} all values of $PNLT$ (computed and described below) within 10 dB of the peak value are included. In this case K_r is only specified as being on a particular lateral line. The position of K_r and Q_{r1} are found from the assumptions that:*

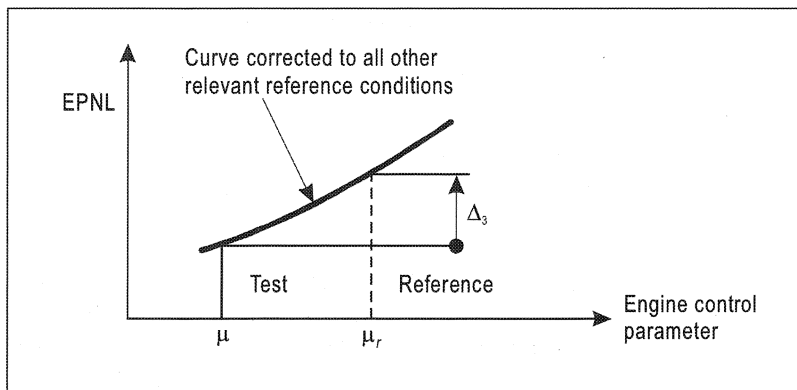


Figure A2-12. Noise thrust correction

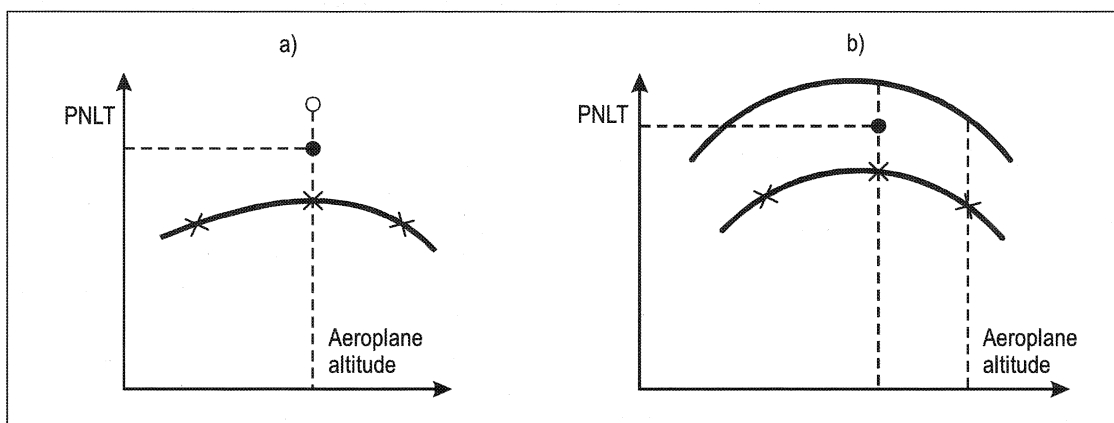


Figure A2-13. Symmetry correction

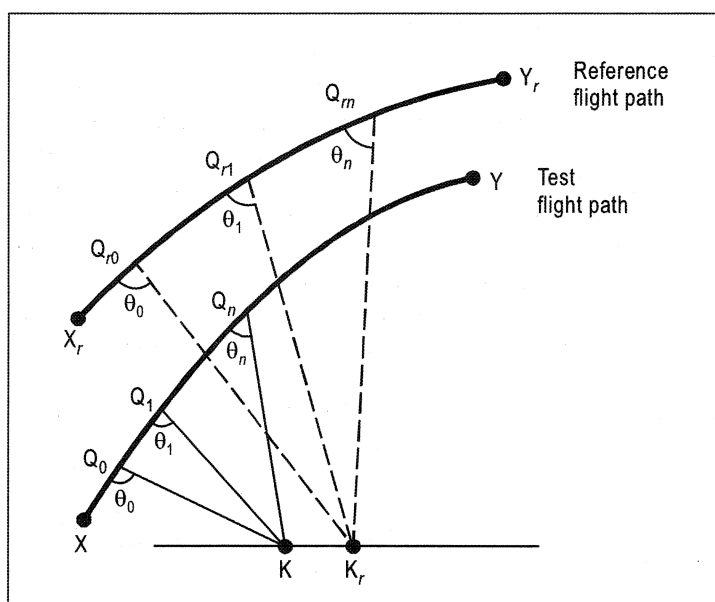


Figure A2-14. Correspondence between measured and reference flight paths for application of correction integrated methods

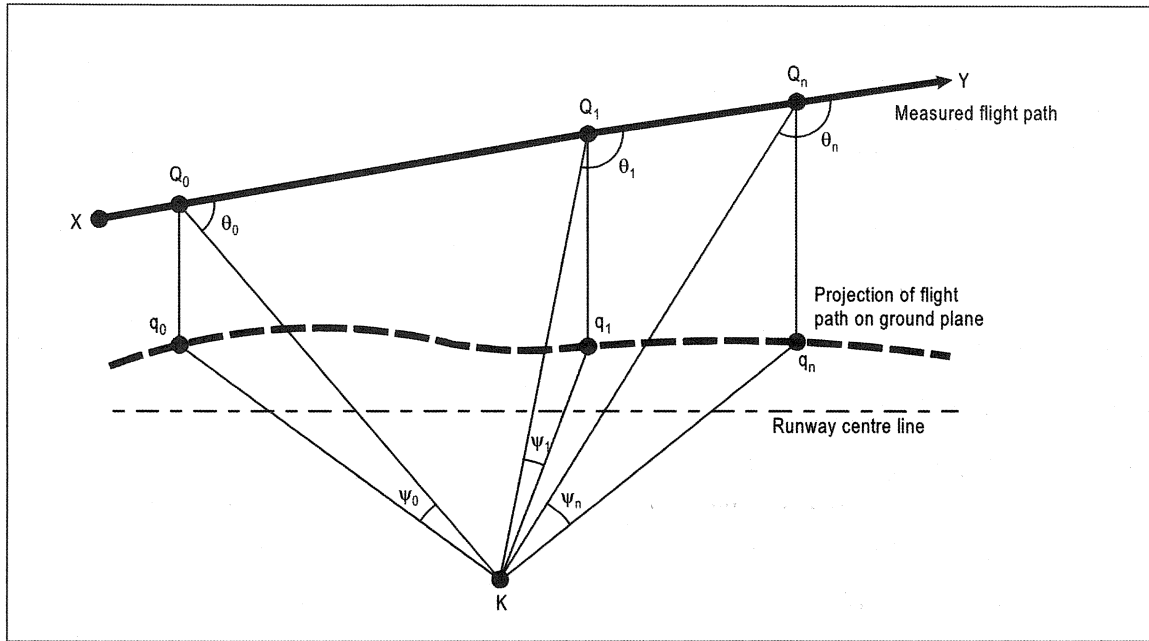


Figure A2-15 a). Measured flight path

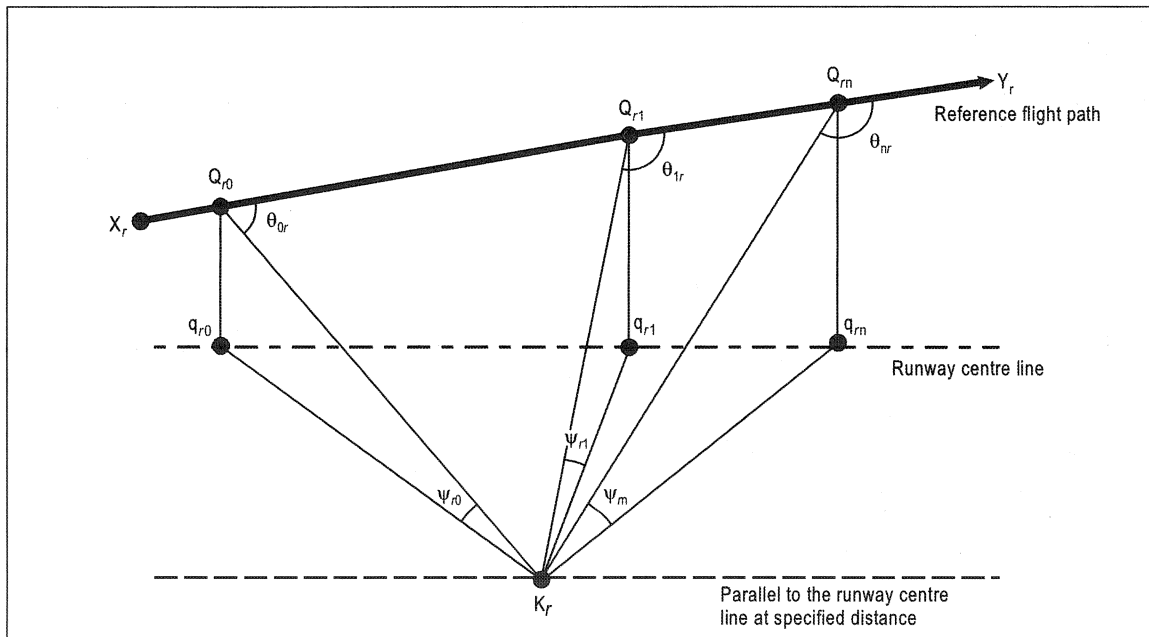


Figure A2-15 b). Reference flight path

- 1) Q_1K and $Q_{r1}K_r$ form the same angle θ_1 with their respective flight paths for all times t_1 ; and
- 2) the differences between the angles ψ_1 and ψ_{r1} are minimized over the relevant part of the time history by a method approved by the certificating authorities.

Note 3.— In the particular case of lateral noise measurement, sound propagation is affected not only by “inverse square” and atmospheric attenuation, but also by ground absorption and reflection effects which depend mainly on the angle ψ . For geometrical reasons it is generally not possible to choose K_r so that condition 1) above is fulfilled while at the same time ψ_1 and ψ_{r1} are kept equal at all times t_1 .

Note 4.— The time t_{r1} is later (for $Q_{r1}K_r > Q_1K$) than t_1 by two separate amounts:

- a) the time taken for the aeroplane to travel the distance $Q_{r1}Q_{r0}$ at a speed V_r , less the time taken for it to travel Q_1Q_0 at V ;
- b) the time taken for sound to travel the distance $Q_{r1}K_r - Q_1K$.

Note 5.— Where thrust or power cutback is used there will be test and reference flight paths at full thrust or power and at cutback thrust or power. Where the transient region between these affects the final result an interpolation must be made between them by an approved method such as that given in Chapter 2, 2.2.1, of Doc 9501.

9.4.2.1 The measured values of $SPL(i)_1$, etc., shall be adjusted to the reference values $SPL(i)_{r1}$, etc., for the differences between measured and reference noise path lengths and between measured and reference atmospheric conditions, by the methods of 9.3.2.1 of this appendix. Corresponding values of PNL_{r1} shall be computed.

9.4.2.2 For each value of PNL_{r1} a pure sound correction C_1 shall be determined by analysing the reference values $SPL(i)_r$, etc., by the methods of 4.3 of this appendix, and added to PNL_{r1} to give $PNLT_{r1}$.

9.4.3 Duration correction

The values of $PNLT_r$ corresponding to those of $PNLT$ at each one-half second interval shall be plotted against time ($PNLT_{r1}$ at time t_{r1} , etc.). The duration correction shall then be determined by the method of 4.5.1 of this appendix, to give $EPNL_r$.

9.4.4 Source noise adjustment

Finally, a source noise adjustment Δ_3 shall be determined by the methods of 9.3.4 of this appendix.

9.5 Flight path identification positions

Position	Description
A	Start of take-off roll.
B	Lift-off.
C	Start of first constant climb.
D	Start of thrust reduction.
E	Start of second constant climb.

<i>Position</i>	<i>Description</i>
F	End of noise certification take-off flight path.
G	Start of noise certification approach flight path.
H	Position on approach path directly above noise measuring station.
I	Start of level-off.
J	Touchdown.
K	Noise measurement point.
K _r	Reference measurement point.
K ₁	Flyover noise measurement point.
K ₂	Lateral noise measurement point.
K ₃	Approach noise measurement point.
M	End of noise certification take-off flight track.
O	Threshold of approach end of runway.
P	Start of noise certification approach flight track.
Q	Position on measured take-off flight path corresponding to apparent PNLTM at station K. See 9.3.2.
Q _r	Position on reference take-off flight path corresponding to PNLTM at station K. See 9.3.2.
V	Aeroplane test speed.
V _r	Aeroplane reference speed.

9.6 Flight path distances

<i>Distance</i>	<i>Unit</i>	<i>Meaning</i>
AB	metres	<i>Length of take-off roll.</i> The distance along the runway between the start of take-off roll and lift off.
AK	metres	<i>Take-off measurement distance.</i> The distance from the start of roll to the take-off noise measurement station along the extended centre line of the runway.
AM	metres	<i>Take-off flight track distance.</i> The distance from the start of roll to the take-off flight track position along the extended centre line of the runway for which the position of the aeroplane need no longer be recorded.
QK	metres	<i>Measured noise path.</i> The distance from the measured aeroplane position Q to station K.

<i>Distance</i>	<i>Unit</i>	<i>Meaning</i>
Q _r K _r	metres	<i>Reference noise path.</i> The distance from the reference aeroplane position Q _r to station K _r .
K ₃ H	metres (feet)	<i>Aeroplane approach height.</i> The height of the aeroplane above the approach measuring station.
OK ₃	metres	<i>Approach measurement distance.</i> The distance from the runway threshold to the approach measurement station along the extended centre line of the runway.
OP	metres	<i>Approach flight track distance.</i> The distance from the runway threshold to the approach flight track position along the extended centre line of the runway for which the position of the aeroplane need no longer be recorded.

APPENDIX 3. NOISE EVALUATION METHOD FOR NOISE CERTIFICATION OF PROPELLER-DRIVEN AEROPLANES NOT EXCEEDING 8 618 kg — APPLICATION FOR TYPE CERTIFICATE SUBMITTED BEFORE 17 NOVEMBER 1988

Note.— See Part II, Chapter 6.

1. INTRODUCTION

Note 1.— This noise evaluation method includes:

- a) noise certification test and measurement conditions;*
- b) measurement of aeroplane noise received on the ground; and*
- c) reporting of data to the certifying authority and correction of measured data.*

Note 2.— The instructions and procedures given in the method are clearly delineated to ensure uniformity during compliance tests, and to permit comparison between tests of various types of aeroplanes, conducted in various geographical locations. The method applies only to aeroplanes within the applicability clauses of Part II, Chapter 6.

2. NOISE CERTIFICATION TEST AND MEASUREMENT CONDITIONS

2.1 General

This section prescribes the conditions under which noise certification tests shall be conducted and the measurement procedures that shall be used to measure the noise made by the aeroplane for which the test is conducted.

2.2 General test conditions

2.2.1 Locations for measuring noise from an aeroplane in flight shall be surrounded by relatively flat terrain having no excessive sound absorption characteristics such as might be caused by thick, matted or tall grass, shrubs or wooded areas. No obstructions which significantly influence the sound field from the aeroplane shall exist within a conical space above the measurement position, the cone being defined by an axis normal to the ground and by a half-angle 75° from this axis.

2.2.2 The tests shall be carried out under the following atmospheric conditions:

- a) no precipitation;

- b) relative humidity not higher than 95 per cent and not lower than 20 per cent and ambient temperature not above 35°C and not below 2°C at 1.2 m (4 ft) above ground except that on a diagram of temperature plotted against relative humidity combinations of temperature and relative humidity which fall below a straight line between 2°C and 60 per cent and 35°C and 20 per cent shall be avoided;
- c) at 1.2 m (4 ft) above ground, instantaneous wind speed shall not exceed 19 km/h (10 kt) and instantaneous crosswind speed shall not exceed 9 km/h (5 kt). Flights shall be made in equal numbers with tailwind and headwind components; and
- d) no temperature inversions or anomalous wind conditions that would significantly affect the noise level of the aeroplane when the noise is recorded at the measuring points specified by the certificating authority.

2.3 Aeroplane testing procedures

2.3.1 The test procedures and noise measurement procedure shall be acceptable to the airworthiness and noise certificating authorities of the State issuing the certification.

2.3.2 The aeroplane height and lateral position relative to the microphone shall be determined by a method independent of normal flight instrumentation, such as radar tracking, theodolite triangulation, photographic scaling techniques, or other methods to be approved by the certificating authority.

3. MEASUREMENT OF AEROPLANE NOISE RECEIVED ON THE GROUND

3.1 General

3.1.1 All measuring equipment shall be approved by the certificating authority.

3.1.2 Sound pressure level data for noise evaluation purposes shall be obtained with acoustical equipment and measurement practices that conform to the specifications given hereunder in 3.2.

3.2 Measurement system

The acoustical measurement system shall consist of approved equipment equivalent to the following:

- a) a microphone system with frequency response compatible with measurement and analysis system accuracy as stated in 3.3;
- b) tripods or similar microphone mountings that minimize interference with the sound being measured;
- c) recording and reproducing equipment characteristics, frequency response, and dynamic range compatible with the response and accuracy requirements of 3.3; and
- d) acoustic calibrators using sine wave or broadband noise of known sound pressure level. If broadband noise is used, the signal shall be described in terms of its average and maximum root-mean-square (rms) value of non-overload signal level.

3.3 Sensing, recording and reproducing equipment

3.3.1 When so specified by the certificating authority, the sound produced by the aeroplane shall be recorded in such a way that the complete information, including time history, is retained. A magnetic tape recorder is acceptable.

3.3.2 The characteristics of the complete system shall comply with the recommendations given in International Electrotechnical Commission (IEC) Publication No. 179¹ with regard to the sections concerning microphone, amplifier and indicating instrument characteristics. The text and specifications of IEC Publication No. 179¹ entitled “Precision Sound Level Meters” are incorporated by reference into this section and are made a part hereof.

Note.— When a tape recorder is used, it forms part of the complete system complying with IEC Recommendation 561.¹

3.3.3 The response of the complete system to a sensibly plane progressive sinusoidal wave of constant amplitude shall lie within the tolerance limits specified in Table IV and Table V for Type I instruments in IEC Publication No. 179,¹ for weighting curve “A” over the frequency range 45 to 11 200 Hz.

3.3.4 The recorded noise signal shall be read through an “A” filter as defined in IEC Publication No. 179,¹ and with dynamic characteristics designated “slow”.

Note.— During tests with high flight speeds, the “fast” dynamic characteristics may be necessary to obtain the true level.

3.3.5 The equipment shall be acoustically calibrated using facilities for acoustic free-field calibration. The overall sensitivity of the measuring system shall be checked before and after the measurement of the noise level for a sequence of aeroplane operations, using an acoustic calibrator generating a known sound pressure level at a known frequency.

Note.— A pistonphone operating at a nominal 124 dB and 250 Hz is generally used for this purpose.

3.3.6 A wind screen shall be employed with the microphone during all measurements of aeroplane noise when the wind speed is in excess of 11 km/h (6 kt). Its characteristics shall be such that when it is used, the complete system including the wind screen will meet the specifications above. Its insertion loss at the frequency of the acoustic calibrator shall also be known and included in the provision of an acoustic reference level for the analysis of the measurements.

3.4 Noise measurement procedures

3.4.1 The microphones shall be oriented in a known direction so that the maximum sound received arrives as nearly as possible in the direction for which the microphones are calibrated. The microphones shall be placed so that their sensing elements are approximately 1.2 m (4 ft) above ground.

3.4.2 Immediately prior to and after each test, a recorded acoustic calibration of the system shall be made in the field with an acoustic calibrator for the two purposes of checking system sensitivity and providing an acoustic reference level for the analysis of the sound level data.

3.4.3 Background noise, including ambient noise and electrical noise of the measurement systems, shall be recorded and determined in the test area with the system gain set at levels which will be used for aeroplane noise measurements. If aeroplane sound pressure levels do not exceed background sound pressure levels by at least 10 dB(A), approved corrections for the contribution of background sound pressure level to the observed sound pressure level shall be applied.

1. As amended. Available from the Central Office of the International Electrotechnical Commission, 3 rue de Varembe, Geneva, Switzerland.

4. REPORTING OF DATA TO THE CERTIFICATING AUTHORITY AND CORRECTION OF MEASURED DATA

4.1 Data reporting

4.1.1 Measured and corrected sound pressure levels obtained with equipment conforming to the specifications described in Section 3 of this appendix shall be reported.

4.1.2 The type of equipment used for measurement and analysis of all acoustic aeroplane performance and meteorological data shall be reported.

4.1.3 The following atmospheric environmental data, measured immediately before, after, or during each test at the observation points prescribed in Section 2 of this appendix shall be reported:

- a) air temperature and relative humidity; and
- b) maximum, minimum and average wind velocities.

4.1.4 Comments on local topography, ground cover, and events that might interfere with sound recordings shall be reported.

4.1.5 The following aeroplane information shall be reported:

- a) type, model and serial numbers of aeroplane, engine(s) and propeller(s);
- b) any modifications or non-standard equipment likely to affect the noise characteristics of the aeroplane;
- c) maximum certificated take-off mass;
- d) for each overflight, airspeed and air temperature at the flyover altitude determined by properly calibrated instruments;
- e) for each overflight, engine performance as manifold pressure or power, propeller speed in revolutions per minute and other relevant parameters determined by properly calibrated instruments;
- f) aeroplane height above ground (see 2.3.2);
- g) corresponding manufacturer's data for the reference conditions relevant to 4.1.5 d) and e).

4.2 Data correction

4.2.1 Correction of noise at source

4.2.1.1 When so specified by the certificating authority, corrections for differences between engine power achieved during the tests and the power that would be achieved at settings corresponding to the highest power in the normal operating range by an average engine of the type under reference conditions shall be applied using approved methods.

4.2.1.2 At a propeller helical tip Mach number at or below 0.70 no correction is required if the test helical tip Mach number is within 0.014 of the reference helical tip Mach number. At a propeller helical tip Mach number above 0.70 and at or below 0.80 no correction is required if the test helical tip Mach number is within 0.007 of the reference helical tip Mach number. Above a helical tip Mach number of 0.80 no correction is required if the helical tip Mach number is within 0.005 of the reference helical tip Mach number. If the test power at any helical tip Mach number is within 10 per cent of the reference power,

no correction for source noise variation with power is required. No corrections are to be made for power changes for fixed pitch propeller-driven aeroplanes. If test propeller helical tip Mach number and power variations from reference conditions are outside these constraints, corrections based on data developed using the actual test aeroplane or a similar configured aeroplane with the same engine and propeller operating as the aeroplane being certificated shall be used as described in Section 4.1 of the *Environmental Technical Manual on the Use of Procedures in the Noise Certification of Aircraft* (Doc 9501).

4.2.2 Correction of noise received on the ground

The noise measurements made at heights different from 300 m (985 ft) shall be adjusted to 300 m (985 ft) by the inverse square law.

4.2.3 Performance correction

Note.— The performance correction is intended to credit higher performance aeroplanes based on their ability to climb at a steeper angle and to fly the traffic pattern at a lower power setting. Also, this correction penalizes aeroplanes with limited performance capability which results in lower rates of climb and higher power settings in the traffic pattern.

4.2.3.1 A performance correction determined for sea level, 15°C conditions and limited to a maximum of 5 dB(A) shall be applied using the method described in 4.2.3.2 and added algebraically to the measured value.

4.2.3.2 The performance correction shall be calculated by using the following formula:

$$\Delta \text{dB} = 49.6 - 20 \log_{10} \left[(3500 - D_{15}) \frac{\text{R/C}}{V_y} + 15 \right]$$

where D_{15} = Take-off distance to 15 m at maximum certificated take-off mass and maximum take-off power (paved runway)

R/C = Best rate of climb at maximum certificated take-off mass and maximum take-off power

V_y = Climb speed corresponding to R/C at maximum take-off power and expressed in the same units.


Note.— When take-off distance is not certificated, the figure of 610 m for single-engined aeroplanes and 825 m for multi-engined aeroplanes is used.

4.3 Validity of results

4.3.1 The measuring point shall be overflown at least four times. The test results shall produce an average dB(A) value and its 90 per cent confidence limits, the noise level being the arithmetic average of the corrected acoustical measurements for all valid test runs over the measuring point.

4.3.2 The samples shall be large enough to establish statistically a 90 per cent confidence limit not exceeding ± 1.5 dB(A). No test result shall be omitted from the averaging process, unless otherwise specified by the certifying authority.

Note.— Methods for calculating the 90 per cent confidence interval are given in Appendix 1 of Doc 9501.



APPENDIX 4. EVALUATION METHOD FOR NOISE CERTIFICATION OF HELICOPTERS NOT EXCEEDING 3 175 kg MAXIMUM CERTIFICATED TAKE-OFF MASS

Note.— See Part II, Chapter 11.

1. INTRODUCTION

Note 1.— This noise evaluation method includes:

- a) noise certification test and measurement conditions;*
- b) definition of sound exposure level using measured noise data;*
- c) measurement of helicopter noise received on the ground;*
- d) adjustment of flight test results; and*
- e) reporting of data to the certifying authority.*

Note 2.— The instructions and procedures given in the method are intended to ensure uniformity during compliance tests of various types of helicopters conducted in various geographical locations. The method applies only to helicopters meeting the applicability clauses of Part II, Chapter 11, of this Annex.

2. NOISE CERTIFICATION TEST AND MEASUREMENT CONDITIONS

2.1 General

This section prescribes the conditions under which noise certification shall be conducted and the meteorological and flight path measurement procedures that shall be used.

2.2 Test environment

2.2.1 The location for measuring noise from the helicopter in flight shall be surrounded by relatively flat terrain having no excessive ground absorption characteristics such as might be caused by thick, matted or tall grass, shrubs or wooded areas. No obstructions which significantly influence the sound field from the helicopter shall exist within a conical space above the test noise measurement position, the cone being defined by an axis normal to the ground and by a half-angle of 80° from this axis.

Note.— Those people carrying out the measurements could themselves constitute such obstructions.

2.2.2 The tests shall be carried out under the following atmospheric conditions:

- a) no precipitation;
- b) relative humidity not higher than 95 per cent or lower than 20 per cent and ambient temperature not above 35°C and not below 2°C at a height between 1.2 m (4 ft) and 10 m (33 ft) above ground; combinations of temperature and humidity which lead to an absorption coefficient in the 8 KHz one-third octave band of greater than 10 dB/100 m shall be avoided;

Note.— Absorption coefficients as a function of temperature and relative humidity are given in Section 7 of Appendix 2 or SAE ARP 866A.

- c) at a height between 1.2 m (4 ft) and 10 m (33 ft) above ground, average wind speed shall not exceed 19 km/h (10 kt) and the average crosswind component shall not exceed 9 km/h (5 kt); and
- d) no other anomalous meteorological conditions that would significantly affect the noise level when recorded at the measuring points specified by the certificating authority.

Note.— Meteorological specifications are given in Section 2.2.2.1 of Appendix 2.

2.2.3 The atmospheric conditions shall be measured within 2 000 m (6 562 ft) from the microphone locations and shall be representative of the conditions existing over the geographical area in which noise measurements are made.

2.3 Flight path measurement

2.3.1 The helicopter position relative to the flight path reference point shall be determined by a method independent of normal flight instrumentation, such as radar tracking, theodolite triangulation or photographic scaling techniques, approved by the certificating authority.

2.3.2 Position and performance data required to make the adjustments referred to in Section 5 of this appendix shall be recorded at an approved sampling rate. Measuring equipment shall be approved by the certificating authority.

2.4 Flight test conditions

2.4.1 The helicopter shall be flown in a stabilized flight condition over a distance sufficient to ensure that the time-varying sound level is measured during the entire time period that the sound level is within 10 dB(A) of L_{Amax} .

Note.— L_{Amax} is defined as the maximum of the A-frequency-weighted S-time-weighted sound level measured during the test run.

2.4.2 The helicopter flyover noise test shall be conducted at the airspeed referred to in Part II, Chapter 11, 11.5.2 with such airspeed adjusted as necessary to produce the same advancing blade tip Mach number as associated with the reference conditions.

2.4.3 The reference advancing blade tip Mach number (M_R) is defined as the ratio of the arithmetic sum of blade tip rotational speed (V_T) and the reference helicopter true airspeed (V_T) divided by the speed of sound (c_R) at 25°C such that:

$$M_R = \frac{(V_T + V_T)}{c_R}$$

3. NOISE UNIT DEFINITION

3.1 The sound exposure level L_{AE} is defined as the level, in decibels, of the time integral of squared A-weighted sound pressure (P_A) over a given time period or event, with reference to the square of the standard reference sound pressure (P_0) of 20 μPa and a reference duration of one second.

3.2 This unit is defined by the expression:

$$L_{AE} = 10 \log \frac{1}{T_0} \int_{t_1}^{t_2} \left(\frac{P_A(t)}{P_0} \right)^2 dt$$

where T_0 is the reference integration time of one second and $(t_2 - t_1)$ is the integration time interval.

3.3 The above integral can be approximated from periodically sampled measurement as:

$$L_{AE} = 10 \log \frac{1}{T_0} \sum_{t=1}^{n(t_2-t_1)} 10^{(0.1L_A(t))}$$

where $L_A(t)$ is the time varying A-frequency-weighted S-time-weighted sound level and n is the number of samples per second.

3.4 The integration time $(t_2 - t_1)$ in practice shall not be less than the 10 dB-down time interval during which $L_A(t)$ first rises to 10 dB(A) below its maximum value and last falls below 10 dB(A) of its maximum value.

4. MEASUREMENT OF HELICOPTER NOISE RECEIVED ON THE GROUND

4.1 General

4.1.1 All measuring equipment shall be approved by the certificating authority.

4.1.2 Sound pressure level data for noise evaluation purposes shall be obtained with acoustical equipment and measurement practices that conform to the specifications given in 4.2.

4.2 Measurement system

The acoustical measurement system shall consist of approved equipment equivalent to the following:

- a) a microphone system with performance characteristics meeting the requirements of 4.3;
- b) tripods or similar microphone mountings that minimize interference with the sound being measured;
- c) recording and reproducing equipment with performance characteristics meeting the requirements of 4.3; and
- d) sound calibrators using sine wave signals of known sound pressure level meeting the requirements of 4.3.

4.3 Sensing, recording and reproducing equipment

4.3.1 The microphone shall be of the type that has a pressure or a diffuse-field sensitivity whose frequency response is nearly flat at grazing incidence.

4.3.2 The SEL may be directly determined from an integrating sound level meter. Alternatively, with the approval of the certificating authority the sound pressure signal produced by the helicopter may be stored on an analog magnetic tape recorder or a digital audio recorder for later evaluation using an integrating sound level meter. The SEL may also be calculated from one-third octave band data obtained from measurements made in conformity with Section 3 of Appendix 2 and using the equation given in 3.3. In this case each one-third octave band sound pressure level shall be weighted in accordance with the A-weighting values given in IEC Publication 61672-1¹.

4.3.3 The characteristics of the complete system with regard to directional response, frequency weighting A, time weighting S (slow), level linearity, and response to short-duration signals, shall comply with the class 1 specifications given in IEC 61672-1¹. The complete system may include tape recorders or digital audio recorders according to IEC 61672-1¹.

Note.— *The certificating authority may approve the use of equipment compliant with class 2 of the current IEC standard, or the use of equipment compliant with class 1 or Type 1 specifications of an earlier standard, if the applicant can show that the equipment had previously been approved for noise certification use by a certificating authority. This includes the use of a sound level meter and graphic level recorder to approximate SEL using the equation given in 3.3. The certificating authority may also approve the use of magnetic tape recorders that comply with the specifications of the older IEC 561 standard if the applicant can show that such use had previously been approved for noise certification use by a certificating authority.*

4.3.4 The overall sensitivity of the measuring system shall be checked before tests start, after testing has ended, and at intervals during testing using a sound calibrator generating a known sound pressure level at a known frequency. The sound calibrator should conform to the class 1 requirements of IEC60942². The output of the sound calibrator shall have been checked by a standardizing laboratory within 6 months of the test series; tolerable changes in output shall be not more than 0.2 dB. The equipment shall be considered satisfactory if the variation over the period immediately prior to and immediately following each test series within a given test day is not greater than 0.5 dB.

Note.— *The certificating authority may approve the use of calibrators compliant with class 2 of the current IEC standard, or the use of calibrators compliant with class 1 of an earlier standard, if the applicant can show that the calibrator had previously been approved for noise certification use by a certificating authority.*

4.3.5 When the sound pressure signals from the helicopter are recorded, the SEL may be determined by playback of the recorded signals into the electrical input facility of an approved sound level meter that conforms to the class 1 performance requirements of IEC 61672-1¹. The acoustical sensitivity of the sound level meter shall be established from playback of the associated recording of the signal from the sound calibrator and knowledge of the sound pressure level produced in the coupler of the sound calibrator under the environmental conditions prevailing at the time of the recording of the sound from the helicopter.

4.3.6 A wind screen should be employed with the microphone during all measurements of helicopter sound levels. Its characteristics should be such that when it is used, the complete system including the wind screen will meet the specifications in 4.3.3.

4.4 Noise measurement procedures

4.4.1 The microphone shall be mounted with the centre of the sensing element 1.2 m (4 ft) above the local ground surface and shall be oriented for grazing incidence, i.e. with the sensing element substantially in the plane defined by the nominal flight path of the helicopter and the measuring station. The microphone mounting arrangement shall minimize the interference of the supports with the sound to be measured.

1. IEC 61672-1: 2002 entitled “Electroacoustics – Sound level metres – Part I: Specifications”. This IEC publication may be obtained from the Bureau central de la Commission électrotechnique internationale, 3 rue de Varembe, Geneva, Switzerland.

2. IEC 60942: 2003 entitled “Electroacoustics – Sound calibrators”. This IEC publication may be obtained from the Bureau central de la Commission électrotechnique internationale, 3 rue de Varembe, Geneva, Switzerland.

4.4.2 If the helicopter sound pressure signal is recorded, the frequency response of the electrical system shall be determined, during each test series, at a level within 10 dB of the full-scale reading used during the tests, utilizing random or pseudo-random pink noise. The output of the noise generator shall have been checked by an approved standards laboratory within six months of the test series, and tolerable changes in the relative output at each one-third octave band shall be not more than 0.2 dB. Sufficient determinations shall be made to ensure that the overall calibration of the system is known for each test.

4.4.3 Where an analog magnetic tape recorder forms part of the measuring chain, each reel of magnetic tape shall carry 30 s of this electrical calibration signal at its beginning and end for this purpose. In addition, data obtained from tape-recorded signals shall be accepted as reliable only if the level difference in the 10 kHz one-third octave band filtered levels of the two signals is not more than 0.75 dB.

Note.— Digital audio recorders typically do not exhibit substantial variation in frequency response or level sensitivity, therefore the pink noise testing described in 4.4.2 is not necessary for digital audio recorders.

4.4.4 The A-frequency-weighted sound level of the background noise, including ambient noise and electrical noise of the measurement systems, shall be determined in the test area with the system gain set at levels which will be used for helicopter noise measurements. If the L_{Amax} of each test run does not exceed the A-frequency-weighted sound level of the background noise by at least 15 dB(A), flyovers at an approved lower height may be used and the results adjusted to the reference measurement height by an approved method.

5. ADJUSTMENT TO TEST RESULTS

5.1 When certification test conditions differ from the reference conditions, appropriate adjustments shall be made to the measured noise data by the methods of this section.

5.2 Corrections and adjustments

5.2.1 The adjustments may be limited to the effects of differences in spherical spreading between the helicopter test flight path and the reference flight path (and between reference and adjusted reference airspeed). No adjustment for the differences in atmospheric attenuation between the test and reference meteorological conditions and between the helicopter test and reference ground speeds need be applied.

5.2.2 The adjustments for spherical spreading and duration may be approximated from:

$$\Delta_1 = 12.5 \log_{10} (H/150) \text{ dB}$$

where H is the height, in metres, of the test helicopter when directly over the noise measurement point.

5.2.3 The adjustment for the difference between reference airspeed and adjusted reference airspeed is calculated from:

$$\Delta_2 = 10 \log_{10} \left(\frac{V_{ar}}{V_r} \right) \text{ dB}$$

where Δ_2 is the quantity in decibels that must be algebraically added to the measured SEL noise level to correct for the influence of the adjustment of the reference airspeed on the duration of the measured flyover event as perceived at the noise measurement station. V_r is the reference airspeed as prescribed under Part II, Chapter 11, 11.5.2, and V_{ar} is the adjusted reference airspeed as prescribed in 2.4.1 of this appendix.

6. REPORTING OF DATA TO THE CERTIFICATING AUTHORITY AND VALIDITY OF RESULTS

6.1 Data reporting

6.1.1 Measured and corrected sound pressure levels obtained with equipment conforming to the specifications described in Section 4 of this appendix shall be reported.

6.1.2 The type of equipment used for measurement and analysis of all acoustic helicopter performance and meteorological data shall be reported.

6.1.3 The following atmospheric environmental data, measured immediately before, after, or during each test at the observation point prescribed in Section 2 of this appendix shall be reported:

- a) air temperature and relative humidity;
- b) wind speeds and wind directions; and
- c) atmospheric pressure.

6.1.4 Comments on local topography, ground cover and events that might interfere with sound recording shall be reported.

6.1.5 The following helicopter information shall be reported:

- a) type, model and serial numbers of helicopter, engine(s) and rotor(s);
- b) any modifications or nonstandard equipment likely to affect the noise characteristics of the helicopter;
- c) maximum certificated take-off and landing mass;
- d) indicated airspeed in kilometres per hour (knots) and rotor speed in rpm during each demonstration;
- e) engine performance parameters during each demonstration; and
- f) helicopter height above the ground during each demonstration.

6.2 Reporting of noise certification reference conditions


Helicopter position and performance data and noise measurements shall be corrected to the noise certification reference conditions specified in Part II, Chapter 11, 11.5. These conditions, including reference parameters, procedures and configurations shall be reported.

6.3 Validity of results

6.3.1 The measuring point shall be overflown at least six times. The test results shall produce an average SEL and its 90 per cent confidence limits, the noise level being the arithmetic average of the corrected acoustical measurements for all valid test runs over the measuring point for the reference procedure.

6.3.2 The sample shall be large enough to establish statistically a 90 per cent confidence limit not exceeding ± 1.5 dB(A). No test results shall be omitted from the averaging process unless approved by the certifying authority.

Note.— Methods for calculating the 90 per cent confidence interval are given in Appendix 1 of the Environmental Technical Manual on the Use of Procedures in the Noise Certification of Aircraft (Doc 9501).



APPENDIX 5. MONITORING AIRCRAFT NOISE ON AND IN THE VICINITY OF AERODROMES

Note.— See Part III.

1. INTRODUCTION

Note 1.— The introduction of jet aircraft operations, as well as the general increase in air traffic, has resulted in international concern over aircraft noise. To facilitate international collaboration on the solution of aircraft noise problems, it is desirable to recommend a procedure for monitoring aircraft noise on and in the vicinity of aerodromes.

Note 2.— In this appendix monitoring is understood to be the routine measurement of noise levels created by aircraft in the operation of an aerodrome. Monitoring usually involves a large number of measurements per day, from which an immediate indication of the noise level may be required.

Note 3.— This appendix specifies the measuring equipment to be used in order to measure noise levels created by aircraft in the operation of an aerodrome. The noise levels measured according to this appendix are approximations to perceived noise levels PNL, in PNdB, as calculated by the method described in Appendix 1, 4.2.

Monitoring of aircraft noise should be carried out either with mobile equipment, often using only a sound level meter, or with permanently installed equipment incorporating one or more microphones with amplifiers located at different positions in the field with a data transmission system linking the microphones to a central recording installation. This appendix describes primarily the latter method, but specifications given in this appendix should also be followed, to the extent the specifications are relevant, when using mobile equipment.

2. DEFINITION

Monitoring of aircraft noise is defined as the routine measurement of noise levels created by aircraft on and in the vicinity of aerodromes for the purpose of monitoring compliance with and checking the effectiveness of noise abatement requirements.

3. MEASUREMENT EQUIPMENT

3.1 The measurement equipment should consist of either portable recording apparatus capable of direct reading, or apparatus located at one or more fixed positions in the field linked through a radio transmission — or cable system (e.g. telephone line) to a centrally located recording device.

3.2 The characteristics of the field equipment, including the transmission system, should comply with IEC Publication No. 179,¹ "Precision Sound Level Meters", except that frequency weighting equal to the inverse of the 40 noy contour (see Figure A5-1) should apply. An approximation, to the nearest decibel, of the inverse of the 40 noy contour relative to the

1. This publication was first issued in 1965 by the Central Office of the International Electrotechnical Commission, 3 rue de Varembe, Geneva, Switzerland.

value at 1 000 Hz, is given in Table A5-1. The relative frequency response of the weighting element of the equipment should be maintained within a tolerance of ± 0.5 dB. When such a weighting network is incorporated in a direct reading instrument, the relation between the acoustical input to the microphone and the meter reading should follow the inverse of the 40 noy contour with the same tolerances as those specified for weighting curve C in IEC Publication No. 179². Measurements obtained by means of the instrumentation described above provide, after adding 7 dB, values which are approximations to the perceived noise levels in PNdB.

3.3 An alternative method of determining approximations to the perceived noise levels can be obtained from measuring the noise using a sound-level meter incorporating the A-weighting network³ and adding a correction K normally between 9 and 14 dB dependent on the frequency spectrum of the noise. The value of K and the method used by the measuring authorities for determination of that value should be specified when reporting results.

3.4 The field installation of microphones for aircraft noise monitoring purposes should provide for suitable protection of the microphones from rain, snow and other adverse weather conditions. Adequate correction for any insertion loss, as a function of frequency and weather conditions, produced by wind screens or other protective enclosures should be applied to the measured data.

Note.— Where a record of the noise as a function of time is required this can be obtained by recording the noise signal on a magnetic tape, a graphic level recorder or other suitable equipment.

3.5 The recording and indicating equipment should comply with IEC Publication No. 179² regarding the dynamic characteristics of the indicating instrument designated as “slow”.

Note.— If the anticipated duration of the noise signal is less than 5 s, the dynamic characteristics designated as “fast” may be used.

For the purpose of this note, the duration is described as the length of the significant time history during which the recorded signal, passed through a weighting network having an amplitude characteristic equal to the inverse 40 noy contour, remains within 10 dB of its maximum value.

3.6 The microphone system should have been originally calibrated at a laboratory equipped for free-field calibration and its calibration should be rechecked at least every six months.

Table A5-1. Approximation to the nearest decibel of the inverse of the 40 noy contour relative to the value at 1 000 Hz

Hz	40	50	63	80	100	125	160
dB	-14	-12	-11	-9	-7	-6	-5
Hz	200	250	315	400	500	630	800
dB	-3	-2	-1	0	0	0	0
Hz	1 000	1 250	1 600	2 000	2 500	3 150	4 000
dB	0	+2	+6	+8	+10	+11	+11
Hz	5 000	6 300	8 000	10 000	12 500		
dB	+10	+9	+6	+3	0		

2. This publication was first issued in 1965 by the Central Office of the International Electrotechnical Commission, 3 rue de Varembé, Geneva, Switzerland.

3. The A-weighting network is described in IEC Publication No. 179.

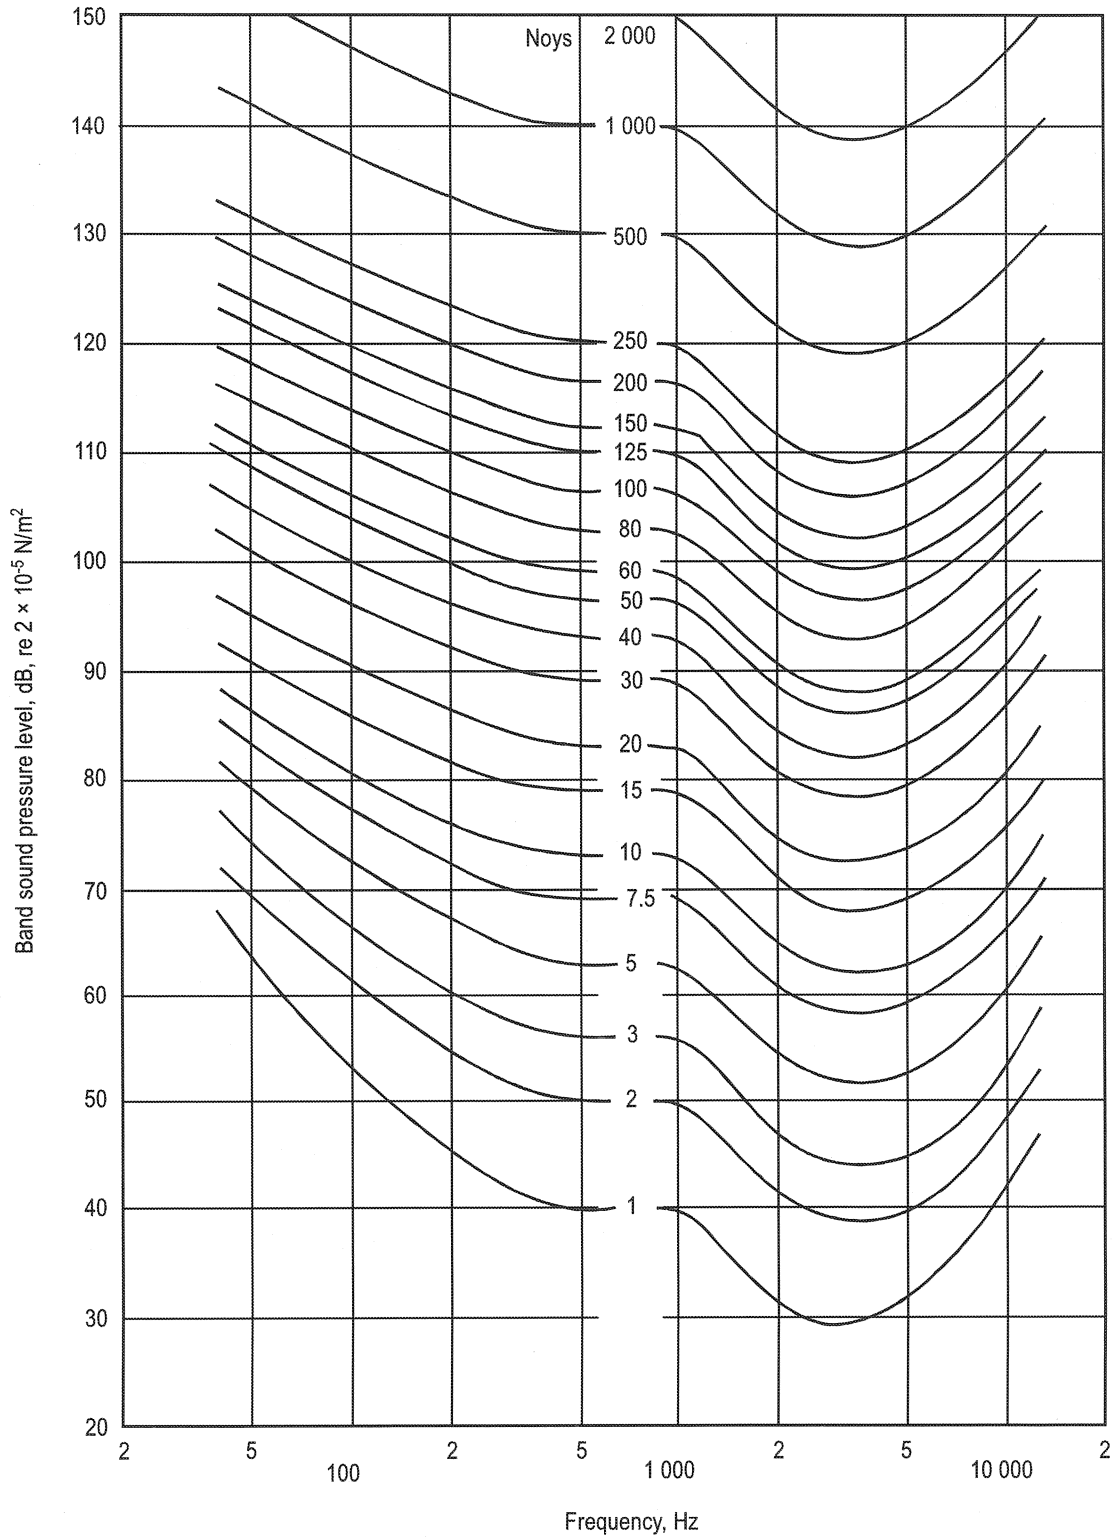


Figure A5-1. Contours of perceived noisiness

3.7 The complete measurement system prior to field installation and at periodic intervals thereafter should be calibrated in a laboratory to ensure that the frequency response and dynamic range requirements of the system comply with the specifications described in this document.

Note.— Direct reading measuring systems that yield approximate values of perceived noise levels other than those defined above are not meant to be excluded from use in monitoring.

4. FIELD EQUIPMENT INSTALLATION

4.1 Microphones used for monitoring noise levels from aircraft operations should be installed at appropriate locations with the axis of maximum sensitivity of each microphone oriented in a direction such that the highest sensitivity to sound waves is achieved. The microphone position should be selected so that no obstruction which influences the sound field produced by an aircraft exists above a horizontal plane passing through the active centre of the microphone.

Note 1.— Monitoring microphones may need to be placed in locations having substantial background noise levels caused by motor vehicle traffic, children playing, etc. In these instances it is often expedient to locate the microphone on a rooftop, telephone pole or other structure rising above the ground. Consequently, it is necessary to determine the background noise level and to carry out a field check, at one or more frequencies, of the overall sensitivity of the measuring system after or before the measurement of the noise level for a sequence of aircraft operations.

Note 2.— If, due to the microphone being placed in a structure above the ground, it is impracticable for operating personnel to calibrate it directly because of its inaccessibility, it can be useful to provide a calibrated sound source at the microphone location. This sound source can be a small loudspeaker, an electrostatic actuator, or similar device.

4.2 Monitoring concerns the noise produced by a single aircraft flight, by a series of flights or by a specified type of aircraft, or by a large number of operations of different aircraft. Such noise levels vary, for a specific monitoring location, with variations in flight procedures or meteorological conditions. In interpretation of the results of a monitoring procedure, consideration should therefore be given to the statistical distribution of the measured noise levels. In describing the results of a monitoring procedure an appropriate description of the distribution of the observed noise levels should be provided.

APPENDIX 6. NOISE EVALUATION METHOD FOR NOISE CERTIFICATION OF PROPELLER-DRIVEN AEROPLANES NOT EXCEEDING 8 618 kg — APPLICATION FOR TYPE CERTIFICATE SUBMITTED ON OR AFTER 17 NOVEMBER 1988

Note.— See Part II, Chapter 10.

1. INTRODUCTION

Note 1.— This noise evaluation method includes:

- a) noise certification test and measurement conditions;*
- b) noise unit;*
- c) measurement of aeroplane noise received on the ground;*
- d) adjustments to test data; and*
- e) reporting of data to the certifying authority and validity of results.*

Note 2.— The instructions and procedures given in the method are clearly delineated to ensure uniformity during compliance tests and to permit comparison between tests of various types of aeroplanes, conducted in various geographical locations. The method applies only to aeroplanes within the applicability clauses of Part II, Chapter 10.

2. NOISE CERTIFICATION TEST AND MEASUREMENT CONDITIONS

2.1 General

This section prescribes the conditions under which noise certification tests shall be conducted and the measurement procedures that shall be used to measure the noise made by the aeroplane for which the test is conducted.

2.2 General test conditions

2.2.1 Locations for measuring noise from an aeroplane in flight shall be surrounded by relatively flat terrain having no excessive sound absorption characteristics such as might be caused by thick, matted or tall grass, shrubs or wooded areas. No obstructions which significantly influence the sound field from the aeroplane shall exist within a conical space above the measurement position, the cone being defined by an axis normal to the ground and by a half-angle 75° from this axis.

2.2.2 The tests shall be carried out under the following atmospheric conditions:

- a) no precipitation;
- b) relative humidity not higher than 95 per cent and not lower than 20 per cent and ambient temperature not above 35°C and not below 2°C;
- c) average wind speed shall not exceed 19 km/h (10 kt) and crosswind average wind speed shall not exceed 9 km/h (5 kt);

Note.— Meteorological specifications are defined in Section 2.2.2.1 of Appendix 2.

- d) no other anomalous meteorological conditions that would significantly affect the noise level of the aeroplane when the noise is recorded at the measuring points specified by the certificating authority; and
- e) the meteorological measurements must be made between 1.2 m and 10 m above ground level. If the measurement site is within 2 000 m of an airport meteorological station, measurements from this station may be used.

2.2.3 The atmospheric conditions shall be measured within 2 000 m (6 562 ft) from the microphone locations and shall be representative of the conditions existing over the geographical area in which noise measurements are made.

2.3 Aeroplane testing procedures

2.3.1 The test procedures and noise measurement procedure shall be acceptable to the airworthiness and noise certificating authorities of the State issuing the certification.

2.3.2 The flight test programme shall be initiated at the maximum take-off mass for the aeroplane, and the mass shall be adjusted to maximum take-off mass after each hour of flight time.

2.3.3 The flight test shall be conducted at $V_y \pm 9$ km/h (5 kt) indicated airspeed.

2.3.4 The aeroplane position relative to the flight path reference point shall be determined by a method independent of normal flight instrumentation, such as radar tracking, theodolite triangulation or photographic scaling techniques, approved by the certificating authorities.

2.3.5 The aeroplane height when directly over the microphone shall be measured by an approved technique. The aeroplane shall pass over the microphone within $\pm 10^\circ$ from the vertical and within ± 20 per cent of the reference height (see Figure A6-1).

2.3.6 Aeroplane speed, position and performance data required to make the adjustments referred to in Section 5 of this appendix shall be recorded when the aeroplane is directly over the measurement site. Measuring equipment shall be approved by the certificating authority.

2.3.7 An independent device accurate to within ± 1 per cent shall be used for the measurement of propeller rotational speed to avoid orientation and installation errors when the test aeroplane is equipped with mechanical tachometers.

3. NOISE UNIT DEFINITION

The L_{Amax} is defined as the maximum level, in decibels, of the A-weighted sound pressure (slow response) with reference to the square of the standard reference sound pressure (P_0) of 20 micropascals (μPa).

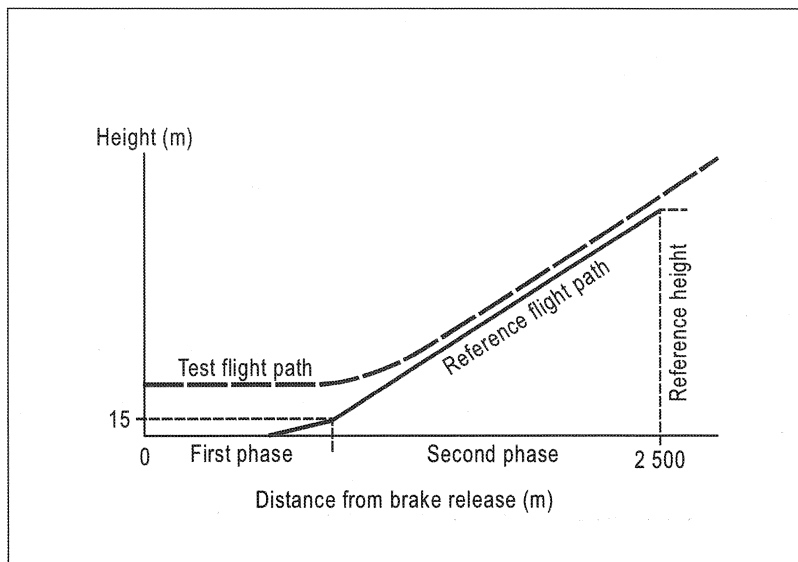


Figure A6-1. Typical test and reference profiles

4. MEASUREMENT OF AEROPLANE NOISE RECEIVED ON THE GROUND

4.1 General

4.1.1 All measuring equipment shall be approved by the certifying authority.

4.1.2 Sound pressure level data for noise evaluation purposes shall be obtained with acoustical equipment and measurement practices that conform to the specifications given hereunder in 4.2.

4.2 Measurement system

The acoustical measurement system shall consist of approved equipment equivalent to the following:

- a) a microphone system designed to have mostly-uniform frequency response for sound incident on the diaphragm from random directions, or in the pressure field of a closed cavity, with performance characteristics meeting the requirements of 4.3;
- b) microphone installation and mounting hardware that minimizes interference with the sound being measured, in the configuration specified in 4.4;
- c) recording and reproducing equipment performance characteristics meeting the requirements of 4.3; and
- d) sound calibrators using sine wave signals of known sound pressure level meeting the requirements of 4.3.

4.3 Sensing, recording and reproducing equipment

4.3.1 The sound level produced by the aeroplane shall be recorded. A magnetic tape recorder, graphic level recorder or sound level meter is acceptable at the option of the certificating authority.

4.3.2 The characteristics of the complete system with regard to directional response, frequency weighting A, time weighting S (slow), level linearity, and response to short-duration signals, shall comply with the class 1 specifications given in the IEC Publication 61672-1¹. The complete system may include tape recorders according to IEC 61672-1¹.

Note.— The certificating authority may approve the use of equipment compliant with class 2 of the current IEC standard, or the use of equipment compliant with class 1 or Type 1 specifications of earlier standards, as an alternative to equipment compliant with class 1 of the current IEC standard, if the applicant can show that the equipment had previously been approved for noise certification use by a certificating authority. The certificating authority may also approve the use of magnetic tape recorders that comply with the specifications of the older IEC 561 standard if the applicant can show that such use had previously been approved for noise certification use by a certificating authority.

4.3.3 The overall sensitivity of the measuring system shall be checked before tests start, after testing has ended, and at intervals during testing using a sound calibrator generating a known sound pressure level at a known frequency. The sound calibrator should conform to the class 1 requirements of IEC 60942².

Note.— The certificating authority may approve the use of calibrators compliant with the class 2 specifications of the current IEC standard, or the use of calibrators compliant with class 1 of an earlier standard, if the applicant can show that the calibrator had previously been approved for noise certification use by a certificating authority.

4.3.4 When the sound from the aeroplane is tape recorded, the maximum A-frequency-weighted and S-time-weighted sound level may be determined by playback of the recorded signals into the electrical input facility of an approved sound level meter that conforms to the class 1 performance requirements of IEC 61672-1¹. The acoustical sensitivity of the sound level meter shall be established from playback of the associated recording of the signal from the sound calibrator and knowledge of the sound pressure level produced in the coupler of the sound calibrator under the environmental conditions prevailing at the time of the recording of the sound from the aeroplane.

4.4 Noise measurement procedures

4.4.1 The microphone shall be a 12.7 mm diameter pressure type, with its protective grid, mounted in an inverted position such that the microphone diaphragm is 7 mm above and parallel to a circular metal plate. This white-painted metal plate shall be 40 cm in diameter and at least 2.5 mm thick, and shall be placed horizontally and flush with the surrounding ground surface with no cavities below the plate. The microphone shall be located three-quarters of the distance from the centre to the edge along a radius normal to the line of flight of the test aeroplane.

4.4.2 If the noise signal is tape-recorded, the frequency response of the electrical system shall be determined, during each test series, at a level within 10 dB of the full-scale reading used during the tests, utilizing random or pseudorandom pink noise. The output of the noise generator shall have been checked by an approved Standards laboratory within six months of the test series, and tolerable changes in the relative output at each one-third octave band shall be not more than 0.2 dB. Sufficient determinations shall be made to ensure that the overall calibration of the system is known for each test.

1. IEC 61672-1: 2002 entitled “Electroacoustics – Sound level metres – Part I: Specifications”. This IEC publication may be obtained from the Bureau central de la Commission électrotechnique internationale, 3 rue de Varembe, Geneva, Switzerland.

2. IEC 60942: 2003 entitled “Electroacoustics – Sound calibrators”. This IEC publication may be obtained from the Bureau central de la Commission électrotechnique internationale, 3 rue de Varembe, Geneva, Switzerland.

4.4.3 Where a magnetic tape recorder forms part of the measuring chain, each reel of magnetic tape shall carry 30 s of this electrical calibration signal at its beginning and end for this purpose. In addition, data obtained from tape recorded signals shall be accepted as reliable only if the level difference in the 10 kHz one-third octave band filtered levels of the two signals is not more than 0.75 dB.

Note.— Digital audio recorders typically do not exhibit substantial variation in frequency response or level sensitivity, therefore the pink noise testing described in 4.4.3 is not necessary for digital audio recorders. Design characteristics for digital audio recorders should be compliant with class 1 performance specifications of IEC 61672-1³.

4.4.4 The A-frequency-weighted sound level of the background noise, including ambient noise and electrical noise of the measurement systems, shall be determined in the test area with the system gain set at levels which will be used for aeroplane noise measurements. If the maximum A-frequency-weighted and S-time-weighted sound level of the aeroplane does not exceed the A-frequency-weighted sound level of the background noise by at least 10 dB, a take-off measurement point nearer to the start of roll shall be used and the results adjusted to the reference measurement point by an approved method.

5. ADJUSTMENT TO TEST RESULTS

5.1 When certification test conditions differ from the reference conditions, appropriate adjustments shall be made to the measured noise data by the methods of this section.

5.2 Corrections and adjustments

5.2.1 The adjustments take account of the effects of:

- a) differences in atmospheric absorption between meteorological test conditions and reference conditions;
- b) differences in the noise path length between the actual aeroplane flight path and the reference flight path;
- c) the change in the helical tip Mach number between test and reference conditions; and
- d) the change in engine power between test and reference conditions.

5.2.2 The noise level under reference conditions (L_{Amax}) REF is obtained by adding increments for each of the above effects to the test day noise level (L_{Amax}) TEST.

$$(L_{Amax})_{REF} = (L_{Amax})_{TEST} + \Delta(M) + \Delta_1 + \Delta_2 + \Delta_3$$

where

- $\Delta(M)$ is the adjustment for the change in atmospheric absorption between test and reference conditions;
 Δ_1 is the adjustment for noise path lengths;
 Δ_2 is the adjustment for helical tip Mach number; and
 Δ_3 is the adjustment for engine power.

3. IEC 61672-1: 2002 entitled "Electroacoustics – Sound level metres – Part I: Specifications". This IEC publication may be obtained from the Bureau central de la Commission électrotechnique internationale, 3 rue de Varembe, Geneva, Switzerland.

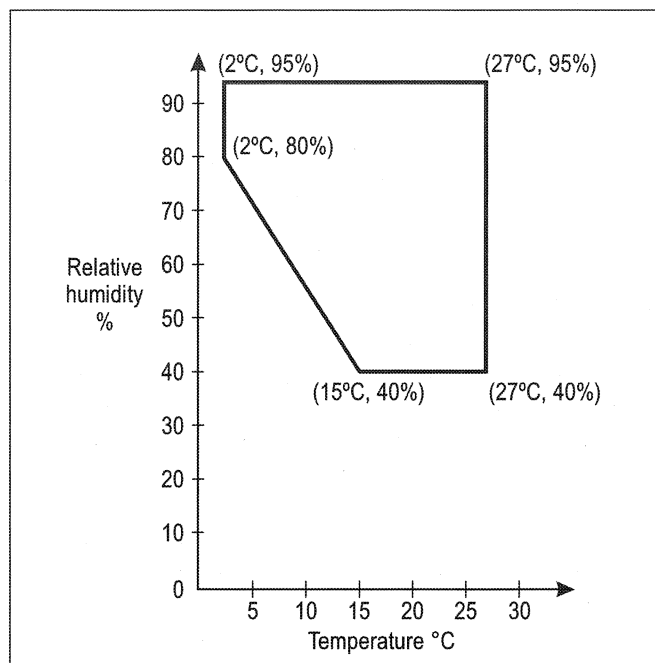


Figure A6-2. Measurement window for no absorption correction

- a) When the test conditions are within those specified in Figure A6-2, no adjustments for differences in atmospheric absorption need be applied, i.e. $\Delta(M) = 0$. If conditions are outside those specified in Figure A6-2 then adjustments must be applied by an approved procedure or by adding an increment $\Delta(M)$ to the test day noise levels where,

$$\Delta(M) = 0.01 (H_T \alpha - 0.2 H_R)$$

and where H_T is the height in metres of the test aeroplane when directly over the noise measurement point, H_R is the reference height of the aeroplane above the noise measurement point, and α is the rate of absorption at 500 Hz specified in Tables A1-5 to A1-16 of Appendix 1.

- b) Measured noise levels should be adjusted to the height of the aeroplane over the noise measuring point on a reference day by algebraically adding an increment equal to Δ_1 . When test day conditions are within those specified in Figure A6-2:

$$\Delta_1 = 22 \log (H_T/H_R)$$

When test day conditions are outside those specified in Figure A6-2:

$$\Delta_1 = 20 \log (H_T/H_R)$$

where H_T is the height of the aeroplane when directly over the noise measurement point, and H_R is the reference height of the aeroplane over the measurement point.

- c) No adjustments for helical tip Mach number variations need be made if the propeller helical tip Mach number is:
- 1) at or below 0.70 and the test helical tip Mach number is within 0.014 of the reference helical tip Mach number;

- 2) above 0.70 and at or below 0.80 and the test helical tip Mach number is within 0.007 of the reference helical tip Mach number;
- 3) above 0.80 and the test helical tip Mach number is within 0.005 of the reference helical tip Mach number. For mechanical tachometers, if the helical tip Mach number is above 0.8 and the test helical tip Mach number is within 0.008 of the reference helical tip Mach number.

Outside these limits measured noise levels shall be adjusted for helical tip Mach number by an increment equal to:

$$\Delta_2 = K_2 \log (M_R/M_T)$$

which shall be added algebraically to the measured noise level, where M_T and M_R are the test and reference helical tip Mach numbers respectively. The value of K_2 shall be determined from approved data from the test aeroplane. In the absence of flight test data and at the discretion of the certificating authority a value of $K_2 = 150$ may be used for M_T less than M_R ; however, for M_T greater than or equal to M_R no correction is applied.

Note.— The reference helical tip Mach number M_R is the one corresponding to the reference conditions above the measurement point:

where

$$M_R = \frac{\left[\left(\frac{D\pi N}{60} \right)^2 + V_T^2 \right]^{1/2}}{c}$$

where D is the propeller diameter in metres.

V_T is the true airspeed of the aeroplane in reference conditions in metres per second.

N is the propeller speed in reference conditions in rpm. If N is not available, its value can be taken as the average of the propeller speeds over nominally identical power conditions during the flight tests.

c is the reference day speed of sound at the altitude of the aeroplane in metres per second based on the temperature at the reference height assuming an ISA temperature lapse rate with height.

- d) Measured sound levels shall be adjusted for engine power by algebraically adding an increment equal to:

$$\Delta_3 = K_3 \log (P_R/P_T)$$

where P_T and P_R are the test and reference engine powers respectively obtained from the manifold pressure/torque gauges and engine rpm. The value of K_3 shall be determined from approved data from the test aeroplane. In the absence of flight test data and at the discretion of the certificating authority a value of $K_3 = 17$ may be used. The reference power P_R shall be that obtained at the reference height pressure and temperature assuming an ISA temperature lapse rate with height.

6. REPORTING OF DATA TO THE CERTIFICATING AUTHORITY AND VALIDITY OF RESULTS

6.1 Data reporting

6.1.1 Measured and corrected sound pressure levels obtained with equipment conforming to the specifications described in Section 4 of this appendix shall be reported.

6.1.2 The type of equipment used for measurement and analysis of all acoustic aeroplane performance and meteorological data shall be reported.

6.1.3 The following atmospheric environmental data, measured immediately before, after, or during each test at the observation points prescribed in Section 2 of this appendix shall be reported:

- a) air temperature and relative humidity;
- b) wind speeds and wind directions; and
- c) atmospheric pressure.

6.1.4 Comments on local topography, ground cover and events that might interfere with sound recordings shall be reported.

6.1.5 The following aeroplane information shall be reported:

- a) type, model and serial numbers of aeroplane, engine(s) and propeller(s);
- b) any modifications or non-standard equipment likely to affect the noise characteristics of the aeroplane;
- c) maximum certificated take-off mass;
- d) for each overflight, airspeed and air temperature at the flyover altitude determined by properly calibrated instruments;
- e) for each overflight, engine performance as manifold pressure or power, propeller speed in revolutions per minute and other relevant parameters determined by properly calibrated instruments;
- f) aeroplane height above the measurement point; and
- g) corresponding manufacturer's data for the reference conditions relevant to 6.1.5 d), e) and f).

6.2 Validity of results

6.2.1 The measuring point shall be overflown at least six times. The test results shall produce an average noise level (L_{Amax}) value and its 90 per cent confidence limits, the noise level being the arithmetic average of the corrected acoustical measurements for all valid test runs over the measuring point.

6.2.2 The samples shall be large enough to establish statistically a 90 per cent confidence limit not exceeding ± 1.5 dB(A). No test results shall be omitted from the averaging process, unless otherwise specified by the certificating authority.

ATTACHMENTS TO ANNEX 16, VOLUME I

ATTACHMENT A. EQUATIONS FOR THE CALCULATION OF NOISE LEVELS AS A FUNCTION OF TAKE-OFF MASS

Note.— See Part II, 2.4.1, 2.4.2, 3.4.1, 4.4, 5.4, 6.3, 8.4.1, 8.4.2, 10.4, 11.4.1 and 11.4.2.

1. CONDITIONS DESCRIBED IN CHAPTER 2, 2.4.1

M = Maximum take-off mass in 1 000 kg		0	34	272	
Lateral noise level (EPNdB)		102	$91.83 + 6.64 \log M$		108
Approach noise level (EPNdB)		102	$91.83 + 6.64 \log M$		108
Flyover noise level (EPNdB)		93	$67.56 + 16.61 \log M$		108

2. CONDITIONS DESCRIBED IN CHAPTER 2, 2.4.2

M = Maximum take-off mass in 1 000 kg		0	34	35	48.3	66.72	133.45	280	325	400
Lateral noise level (EPNdB) All aeroplanes		97	$83.87 + 8.51 \log M$							106
Approach noise level (EPNdB) All aeroplanes		101	$89.03 + 7.75 \log M$					108		
Flyover noise levels (EPNdB)	2 engines	93		$70.62 + 13.29 \log M$				104		
	3 engines	93	$67.56 + 16.61 \log M$			$73.62 + 13.29 \log M$			107	
	4 engines	93	$67.56 + 16.61 \log M$				$74.62 + 13.29 \log M$		108	

3. CONDITIONS DESCRIBED IN CHAPTER 3, 3.4.1

M = Maximum take-off mass in 1 000 kg		0	20.2	28.6	35	48.1	280	385	400	
Lateral full-power noise level (EPNdB) All aeroplanes		94	$80.87 + 8.51 \log M$							103
Approach noise level (EPNdB) All aeroplanes		98	$86.03 + 7.75 \log M$					105		
Flyover noise levels (EPNdB)	2 engines or less	89		$66.65 + 13.29 \log M$				101		
	3 engines	89	$69.65 + 13.29 \log M$					104		
	4 engines or more	89	$71.65 + 13.29 \log M$						106	

4. CONDITIONS DESCRIBED IN CHAPTER 4, 4.4

Each of the following conditions shall apply:

$$EPNL_L \leq LIMIT_L; EPNL_A \leq LIMIT_A; \text{ and } EPNL_F \leq LIMIT_F;$$

$$[(LIMIT_L - EPNL_L) + (LIMIT_A - EPNL_A) + (LIMIT_F - EPNL_F)] \geq 10$$

$$[(LIMIT_L - EPNL_L) + (LIMIT_A - EPNL_A)] \geq 2; [(LIMIT_L - EPNL_L) + (LIMIT_F - EPNL_F)] \geq 2; \text{ and}$$

$$[(LIMIT_A - EPNL_A) + (LIMIT_F - EPNL_F)] \geq 2$$

where

$EPNL_L$, $EPNL_A$ and $EPNL_F$ are, respectively, the noise levels at the lateral, approach and flyover reference noise measurement points when determined, to one decimal place, in accordance with the noise evaluation method of Appendix 2; and

$LIMIT_L$, $LIMIT_A$, and $LIMIT_F$ are, respectively, the maximum permitted noise levels at the lateral, approach and flyover reference noise measurement points determined, to one decimal place, in accordance with the equations for the conditions described in Chapter 3, 3.4.1 (Condition 3).

5. CONDITIONS DESCRIBED IN CHAPTER 5, 5.4

M = Maximum take-off
mass in 1 000 kg

	5.7	34.0	358.9	384.7
Lateral noise level (EPNdB)	96	85.83 + 6.64 log M		103
Approach noise level (EPNdB)	98	87.83 + 6.64 log M		105
Flyover noise level (EPNdB)	89	63.56 + 16.61 log M		106

6. CONDITIONS DESCRIBED IN CHAPTER 6, 6.3

M = Maximum take-off
mass in 1 000 kg

	0	0.6	1.5	8.618
Noise level in dB(A)	68	60 + 13.33 M		80

7. CONDITIONS DESCRIBED IN CHAPTER 8, 8.4.1

M = Maximum take-off
mass in 1 000 kg

	0	0.788	80.0
Take-off noise level (EPNdB)	89	90.03 + 9.97 log M	
Approach noise level (EPNdB)	90	91.03 + 9.97 log M	
Overflight noise level (EPNdB)	88	89.03 + 9.97 log M	

8. CONDITIONS DESCRIBED IN CHAPTER 8, 8.4.2

M = Maximum take-off
mass in 1 000 kg

	0	0.788	80.0
Take-off noise level (EPNdB)	86	$87.03 + 9.97 \log M$	106
Approach noise level (EPNdB)	89	$90.03 + 9.97 \log M$	109
Overflight noise level (EPNdB)	84	$85.03 + 9.97 \log M$	104

9. CONDITIONS DESCRIBED IN CHAPTER 10, 10.4 a) and 10.4 b)

10.4 a):

M = Maximum take-off
mass in 1 000 kg

	0	0.6	1.4	8.618
Noise level in dB(A)	76	$83.23 + 32.67 \log M$	88	

10.4 b):

M = Maximum take-off
mass in 1 000 kg

	0	0.57	1.5	8.618
Noise level in dB(A)	70	$78.71 + 35.70 \log M$	85	

10. CONDITIONS DESCRIBED IN CHAPTER 11, 11.4.1


M = Maximum take-off
mass in 1 000 kg

	0	0.788	3.175
Noise level in dB SEL	82	$83.03 + 9.97 \log M$	

11. CONDITIONS DESCRIBED IN CHAPTER 11, 11.4.2

M = Maximum take-off
mass in 1 000 kg

	0	1.417	3.175
Noise level in dB SEL	82	$80.49 + 9.97 \log M$	



ATTACHMENT B. GUIDELINES FOR NOISE CERTIFICATION OF PROPELLER-DRIVEN STOL AEROPLANES

Note.— See Part II, Chapter 7.

Note 1.— For the purpose of these guidelines, STOL aeroplanes are those which, when operating in the short take-off and landing mode, consistent with the relevant airworthiness requirements, require a runway length (with no stopway or clearway) of not more than 610 m at maximum certificated mass for airworthiness.

Note 2.— These guidelines are not applicable to aircraft with vertical take-off and landing capabilities.

1. APPLICABILITY

The following guidelines should be applied to all propeller-driven aeroplanes of over 5 700 kg maximum certificated take-off mass intended for operation in the short take-off and landing (STOL) mode, requiring a runway¹ length, compatible with the relevant take-off and landing distance requirements, of less than 610 m at maximum certificated mass for airworthiness, and for which a certificate of airworthiness for the individual aeroplane was first issued on or after 1 January 1976.

2. NOISE EVALUATION MEASURE

The noise evaluation measure should be the effective perceived noise level in EPNdB as described in Appendix 2 to this Annex.

3. NOISE MEASUREMENT REFERENCE POINTS

The aeroplane, when tested in accordance with the flight test procedure of Section 6, should not exceed the noise levels specified in Section 4 at the following reference points:

- a) *lateral noise reference point*: the point on a line parallel to and 300 m from the runway centre line, or extended runway centre line, where the noise level is a maximum during take-off or landing, with the aeroplane operating in the STOL mode;
- b) *flyover noise reference point*: the point on the extended centre line of the runway 1 500 m from the start of the take-off roll; and
- c) *approach noise reference point*: the point on the extended centre line of the runway 900 m from the runway threshold.

1. With no stopway or clearway.

4. MAXIMUM NOISE LEVELS

The maximum noise level at any of the reference points, when determined in accordance with the noise evaluation method of Appendix 2, should not exceed 96 EPNdB in the case of aeroplanes with maximum certificated mass of 17 000 kg or less, this limit increasing linearly with the logarithm of mass at a rate of 2 EPNdB per doubling of mass in the case of aeroplanes having maximum certificated mass in excess of 17 000 kg.

5. TRADE-OFFS

If the maximum noise levels are exceeded at one or two measurement points:

- a) the sum of any excesses should not be greater than 4 EPNdB;
- b) any excess at any single point should not be greater than 3 EPNdB; and
- c) any excesses should be offset by a corresponding reduction at the other point or points.

6. TEST PROCEDURES

6.1 The take-off reference procedure should be as follows:

- a) the aeroplane should be at the maximum take-off mass for which noise certification is requested;
- b) the propeller and/or engine speed (rpm) and engine power setting scheduled for STOL take-off should be used; and
- c) throughout the take-off noise certification demonstration test, the airspeed, climb gradient, aeroplane attitude and aeroplane configuration should be those specified in the flight manual for take-off in the STOL mode.

6.2 The approach reference procedure should be as follows:

- a) the aeroplane should be at the maximum landing mass for which the noise certification is requested;
- b) throughout the approach noise certification demonstration test, the propeller and/or engine speed (rpm), engine power setting, airspeed, descent gradient, aeroplane attitude and aeroplane configuration should be those specified in the flight manual for STOL landing; and
- c) the use of reverse thrust after landing should be the maximum specified in the flight manual.

7. ADDITIONAL NOISE DATA

Where so specified by the certificating authority, data permitting measured noise levels to be evaluated in terms of the A-weighted overall sound pressure level (dB(A)) should be provided.

ATTACHMENT C. GUIDELINES FOR NOISE CERTIFICATION OF INSTALLED AUXILIARY POWER UNITS (APU) AND ASSOCIATED AIRCRAFT SYSTEMS DURING GROUND OPERATION

Note.— See Part II, Chapter 9.

1. INTRODUCTION

1.1 The following guidance material has been prepared for the information of States establishing noise certification requirements for installed auxiliary power units (APU) and associated aircraft systems used during normal ground operation.

1.2 It should apply to installed APU and associated aircraft systems in all aircraft for which the application for a Type Certificate, or another equivalent prescribed procedure, is submitted on or after 26 November 1981.

1.3 For aircraft of existing type design, for which the application for a change of type design involving the basic APU installation, or another equivalent prescribed procedure, is made on or after 26 November 1981, the noise levels produced by installed APU and associated aircraft systems should not exceed those existing prior to the change, when determined in accordance with the following guidelines.

2. NOISE EVALUATION PROCEDURE

The noise evaluation procedure should be according to the methods specified in Section 4.

3. MAXIMUM NOISE LEVELS

The maximum noise levels, when determined in accordance with the noise evaluation procedure specified in Section 4, should not exceed the following:

- a) 85 dB(A) at the points specified in 4.4.2.2 a), b) and c);
- b) 90 dB(A) at any point on the perimeter of the rectangle shown in Figure C-2.

4. NOISE EVALUATION PROCEDURES

4.1 General

4.1.1 Test procedures are described for measuring noise at specific locations (passenger and cargo doors, and servicing positions) and for conducting general noise surveys around aircraft.

4.1.2 Requirements are identified with respect to instrumentation, acoustic and atmospheric environment data acquisition, reduction and presentation, and such other information as is needed for reporting the results.

4.1.3 Procedures involve recording data on magnetic tape for subsequent processing. The use of tape-recorder time-integrating analyser systems avoids the need to average by eye the variations associated with manual readings from sound level meters and octave band analysers and therefore yields more accurate results.

4.1.4 No provision is made for predicting APU noise from basic engine characteristics, nor for measuring noise of more than one aircraft operating at the same time.

4.2 General test conditions

4.2.1 Meteorological conditions

Wind: not more than 19 km/h (10 kt).

Temperature: not less than 2°C nor more than 35°C.

Humidity: relative humidity not less than 30 per cent nor more than 90 per cent.

Precipitation: none.

Barometric pressure: not less than 800 hPa nor more than 1 100 hPa.

4.2.2 Test site

The ground between microphone and aircraft should be a smooth, hard surface. No obstructions should be present between aircraft and measurement positions and no reflecting surfaces (except the ground and aircraft) should be near enough to sound paths to significantly influence results. Surface of the ground surrounding the aircraft should be sensibly flat and level at least over an area formed by boundaries parallel to and 60 m beyond the outermost microphone array identified in 4.4.2.2 d).

4.2.3 Ambient noise

Ambient noise of the measurement system and test area (that is, composite of the noise due to environmental background and the electrical noise of the acoustic instrumentation) should be determined.

4.2.4 APU installation

Pertinent APU and associated aircraft systems should be tested for each aircraft model for which acoustic data are required.

4.2.5 Aircraft ground configuration

Aircraft flight control surfaces should be in the “neutral” or “clean” configuration, with gust locks on, or as stated in the aircraft’s approved operating manual for aircraft undergoing servicing.

4.3 Instrumentation

4.3.1 Aircraft

Operational data identified in 4.5.4 should be determined from normal aircraft instruments and controls.

4.3.2 Acoustical

4.3.2.1 General

Instrumentation and measurement procedures should be consistent with requirements of latest applicable issues of appropriate standards listed in the references (see 4.6). All data samples should be at least 2.5 times the data reduction integration period which in no case should be less than 8 s. All sound pressure levels should be in decibels to a reference pressure of 20 μ Pa.

4.3.2.2 Data acquisition systems

Instrumentation systems for recording and analysis of noise, shown in the block diagram of Figure C-1, should meet the following specifications:

4.3.2.2.1 Microphone system

- a) Over a frequency range of at least 45 Hz to 11 200 Hz the system should meet the requirements as outlined under microphone system specifications in the latest issue of reference 10 (see 4.6).
- b) Microphones should be omnidirectional, vented for pressure equalization if of condenser type, and should have known ambient pressure and temperature coefficients. Microphone amplifier specifications should be compatible with those of the microphone and tape recorder.
- c) Microphone wind screens should be employed when wind speed is in excess of 11 km/h (6 kt). Corrections as a function of frequency should be applied to measured data to account for the presence of microphone wind screens.

4.3.2.2.2 Tape recorder

The tape recorder may be direct record or FM and should have the following characteristics:

- a) dynamic range of 50 dB minimum in the octave or one-third octave bands;
- b) tape speed accuracy within ± 0.2 per cent of rated speed;
- c) wow and flutter (peak to peak) less than 0.5 per cent of tape speed;
- d) maximum third harmonic distortion less than 2 per cent.

4.3.2.3 Calibration

4.3.2.3.1 Microphone

Frequency response calibration should be performed prior to the test series and a subsequent post-calibration should be performed within one month of the pre-calibration, with additional calibrations made when shock or damage is suspected. Response calibration should cover the range of at least 45 Hz to 11 200 Hz. Pressure response characteristics of the microphone should be corrected to obtain random incidence calibration.

4.3.2.3.2 Recording system

- a) A calibration tape, a recording of broadband noise or a sweep of sinusoidal signals over a minimum frequency range of 45 Hz to 11 200 Hz should be recorded in the field or in the laboratory at the beginning and end of each test. The tape should also include signals at the frequencies employed during sound pressure sensitivity checks as defined below.
- b) This calibration signal, an insert voltage, should be applied to the input and should include all signal conditioning preamplifiers, networks and recorder electronics used to record acoustic data. In addition, a “shorted input” (i.e. microphone pressure sensitive element replaced with equivalent electrical impedance) recording of at least 20 s should be made as a check on system dynamic range and noise floor.
- c) Sound pressure sensitivity calibrations with the arrangements shown in Figure C-1 should be made in the field for each microphone prior to beginning and after completion of measurements each day. These calibrations should be made using a calibrator producing a known and constant-amplitude sound pressure level at one or more one-third octave band centre frequencies, specified in reference 11 in the frequency range from 45 Hz to 11 200 Hz. A barometric correction should be applied as required. Calibrators employed should be precise at least to within ± 0.5 dB and should have a calibration obtained according to references 6 to 9 (see 4.6).
- d) Each reel of tape should have comparable response and background noise to the calibration tape. A constant amplitude sine wave should be recorded at the start of each reel of tape, for reel-to-reel sound pressure sensitivity comparisons. The frequency of this sine wave should be within the same frequency range as used for sound pressure sensitivity checks. A separate voltage insert device or an acoustic calibrator may be used for this purpose. If an acoustic calibrator is used, it should be carefully “seated” and corrections for ambient pressure should be made so that effects of pressure on calibrator and microphone response are eliminated.
- e) Battery-driven tape recorders should be checked at frequent intervals during a test to ensure good battery condition. Tape recorders should not be moved while recording is in progress unless it has been established that such movements will not change tape recorder characteristics.

4.3.2.3.3 Data reduction equipment

Data reduction equipment should be calibrated with electrical signals of known amplitude either at a series of discrete frequencies or with broadband signals covering the frequency range of 45 Hz to 11 200 Hz.

4.3.2.4 Data reduction

4.3.2.4.1 The data reduction system of Figure C-1 should provide one-third or one octave band sound pressure levels. Analyser filters should comply with requirements of reference 12 (Class II for octave band filters and Class III for one-third octave band filters). Analyser amplitude resolution should be no worse than 0.5 dB; dynamic range should be a minimum of 50 dB between full scale and the root-mean-square (rms) value of the analyser noise floor in the octave band with the highest noise floor; and amplitude response over the upper 40 dB range should be linear to within ± 0.5 dB.

4.3.2.4.2 Mean-square sound pressures should be time averaged by integration of the squared output of frequency band filters over an integration interval that should be no less than 8 s. All data should be processed within the frequency range from 45 Hz to 11 200 Hz. Data should be corrected for all known or predictable errors, such as deviations of system frequency response from a flat response.

4.3.2.5 Total system

4.3.2.5.1 In addition to specifications for component systems, frequency response of the combined data acquisition and reduction system should be flat within ± 3 dB over the frequency range from 45 Hz to 11 200 Hz. Frequency response gradient anywhere within this range should not exceed 5 dB per octave.

4.3.2.5.2 Amplitude resolution should be at least 1.0 dB. Dynamic range should be a minimum of 45 dB between full scale and the rms value of the system noise floor in the frequency band with the highest noise floor. Amplitude response should be linear within ± 0.5 dB over the upper 35 dB in each frequency band.

4.3.3 Meteorological

The wind speed should be measured with a device having a range of at least 0 to 28 km/h (0 to 15 kt) with an accuracy of at least ± 2 km/h (± 1 kt). Temperature measurements should be made with a device having a range of at least 0°C to 40°C with an accuracy of at least ± 0.5 °C. Relative humidity should be measured with a device having a range of 0 to 100 per cent with an accuracy of at least ± 5 percentage points. Atmospheric pressure should be measured with a device having a range of at least 800 to 1 100 hPa with an accuracy of at least ± 3 hPa.

4.4 Test procedure

4.4.1 Test conditions

4.4.1.1 Ambient noise measurements should be made in sufficient number to be representative for all acoustic measurement stations, providing correction data to apply to measured APU noise where necessary (see 4.4.4).

4.4.1.2 The installed APU should meet the noise levels specified in 3.1 at the points specified under typical loads, up to and including those imposed by the electric power generator and air-conditioning units and any other associated systems at their normal maximum continuous ground operation power requirements.

Note.— A measurement of noise from a particular model of auxiliary power unit installed in a specific aircraft type should not be deemed typical of the same equipment installed in other aircraft types nor of other models of APU installed in the same aircraft type.

4.4.2 Acoustical measurement locations

4.4.2.1 Except where specified otherwise, noise measurements should be made with microphones at $1.6 \text{ m} \pm 0.025 \text{ m}$ ($5.25 \text{ ft} \pm 1.0 \text{ in}$) above the ground or surface where passengers or servicing personnel may stand, with the microphone diaphragm parallel to the ground and facing upwards.

4.4.2.2 Locations for measuring noise should be as follows:

- a) *cargo door locations*: measurements should be made at each cargo door location, with the door open, while the aircraft is in a typical ground handling configuration. These measurements should be taken at the centre of the opening, in the plane of the fuselage skin;
- b) *passenger door locations*: measurements should be made at each passenger entry door, with the door open, on the vertical centre line of the opening, in the plane of the fuselage skin;
- c) *servicing locations*: measurements should be made at all servicing positions where persons are normally working during aircraft ground handling operations, these positions to be determined by reference to the approved aircraft operating and service manuals;
- d) *survey locations*: appropriate measurement positions should be chosen along the sides of a rectangle centred on the test aircraft as illustrated in Figure C-2. The distance between measurement positions should not be greater than 10 m for large aircraft. This distance may be reduced to accommodate small aeroplanes or to fulfil special requirements.

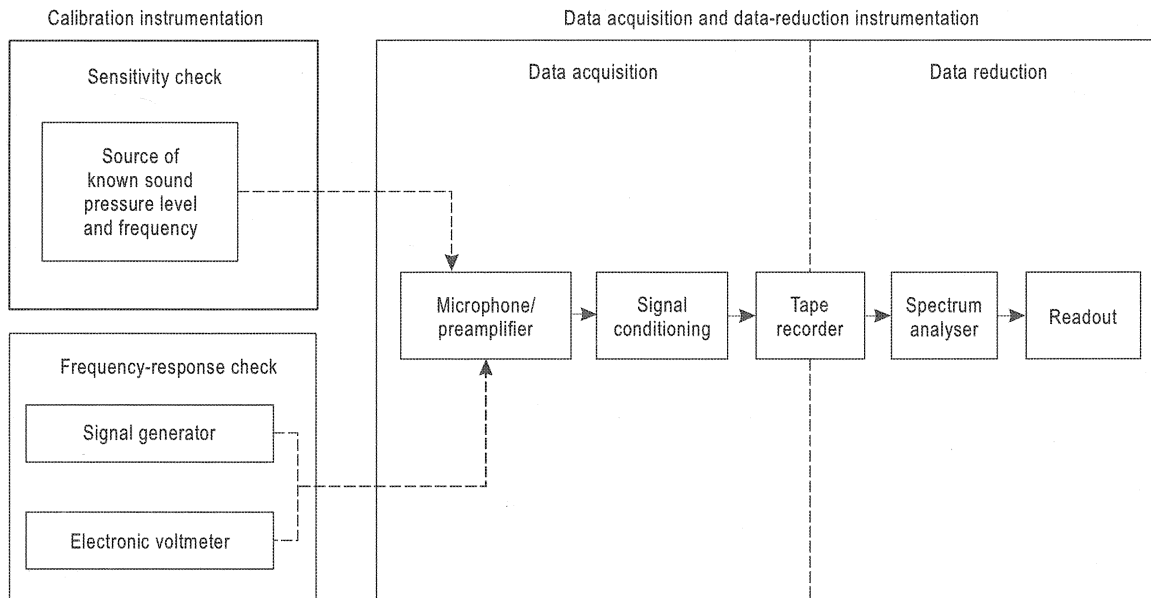


Figure C-1. Noise measurement systems

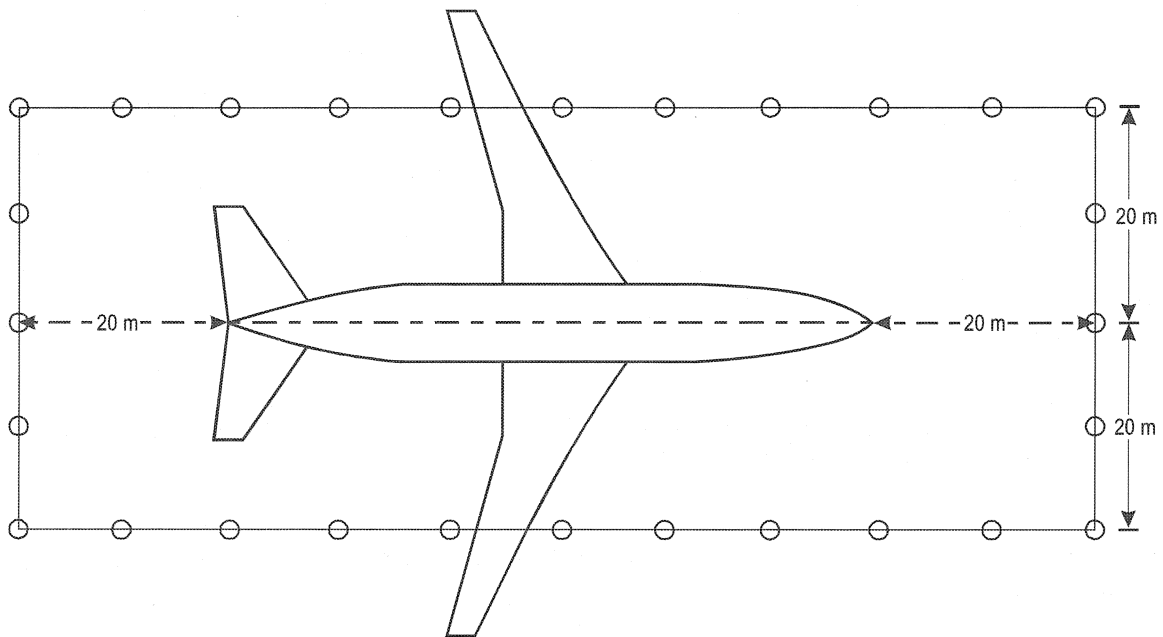


Figure C-2. Rectangle of noise survey measurement positions

4.4.3 Meteorological measurement locations

Meteorological data should be measured at a location at the test site within the microphone array of Figure C-2, but upwind of the aircraft and at a height of 1.6 m (5.25 ft) above ground level.

4.4.4 Data presentation

4.4.4.1 A-weighted sound levels should be calculated by applying frequency weighting corrections derived from the standards for precision sound level meters (reference 10) to one-third or one octave band sound pressure levels. The one octave band sound pressure levels may be determined from a summation of mean-square sound pressures in appropriate one-third octave bands. Overall sound pressure levels should be determined from a summation of mean-square sound pressures in the 24 one-third octave, or 8 one octave, frequency bands included in the frequency range from 45 Hz to 11 200 Hz.

4.4.4.2 Overall sound pressure levels, A-weighted sound levels and one-third or one octave band data should be presented to the nearest decibel (dB) in tabular form, with supplementary graphical presentations as appropriate. Sound pressure levels should be corrected, if necessary, for the presence of high ambient noise. No corrections are needed if a sound pressure level is 10 dB or more above ambient noise. For sound pressure levels between 3 and 10 dB above ambient noise, measured values should be corrected for ambient noise by logarithmic subtraction of levels. If sound pressure levels do not exceed ambient noise by as much as 3 dB, the measured values may be adjusted by means of a method agreed to by the certificating authority.

4.4.4.3 Acoustical data need not be normalized for atmospheric absorption losses. Test results should be reported under the actual test-day meteorological conditions.

4.5 Data reporting

4.5.1 Identification information

- a) Test location, date and time of test.
- b) Manufacturer and model of the APU and pertinent associated equipment.
- c) Aircraft type, manufacturer, model and air registry number.
- d) Plan and elevation views, as appropriate, of the aircraft outline showing location of the APU (including inlet and exhaust ports), all associated equipment, and all acoustical measurement stations.

4.5.2 Test site description

- a) Type and location of ground surfaces.
- b) Location and extent of any above-ground-level reflective surfaces, such as buildings or other aircraft, that might have been present in spite of the precautions noted in 4.2.2.

4.5.3 Meteorological data (*for each test condition*)

- a) Wind speed, km/h (kt) and direction, degrees, relative to aircraft centre line (forward 0°).

- b) Ambient temperature °C.
- c) Relative humidity, per cent.
- d) Barometric pressure, hPa.

4.5.4 Operational data (for each test condition)

- a) Number of air-conditioning packs operated and their locations.
- b) APU shaft speed(s), rpm or percentage of normal rated.
- c) APU normal rated shaft speed, rpm.
- d) APU shaft load (kW), horsepower and/or electric power output, kVA.
- e) Pneumatic load, kg/min delivered by APU to all pneumatically operated aircraft systems during the test (calculated as required).
- f) Temperature of APU exhaust gas at location specified in aircraft's approved operations manual, °C.
- g) Operating mode of environmental control system, cooling or heating.
- h) Air conditioning distribution system supply duct temperature, °C.
- i) Events occurring during the test which may have influenced the measurements.

4.5.5 Instrumentation

- a) A brief description (including manufacturer and type or model numbers) of the acoustical and meteorological measuring instruments.
- b) A brief description (including manufacturer and type or model numbers) of the data acquisition and data processing systems.

4.5.6 Acoustical data

- a) Ambient noise.
- b) Acoustical data specified in 4.4.4 with a description of corresponding microphone locations.
- c) List of standards used and description and reason for any deviations.

4.6 References

Related standard for instruments and measurement procedures

1. *International Electrotechnical Vocabulary*, 2nd Edition, IEC-50(08) (1960).

2. *Acoustic Standard Tuning Frequency*, ISO-16.
3. *Expression of the Physical and Subjective Magnitudes of Sound or Noise*, ISO-131 (1959).
4. *Acoustics — Preferred Reference Quantities for Acoustic Levels*, ISO DIS 1638.2.
5. *Guide to the Measurement of Acoustical Noise and Evaluation of its Effects on Man*, ISO-2204 (1973).
6. *Precision Method for Pressure Calibration of One-inch Standard Condenser Microphone by the Reciprocity Technique*, IEC-327 (1971).
7. *Precision Method for Free Field Calibration of One-inch Standard Condenser Microphone by the Reciprocity Technique*, IEC-486 (1974).
8. *Values for the Difference between Free Field and Pressure Sensitivity Levels for One-inch Standard Condenser Microphone*, IEC-655 (1979).
9. *Simplified Method for Pressure Calibration of One-inch Standard Condenser Microphone by the Reciprocity Technique*, IEC-402 (1972).
10. *IEC Recommendations for Sound Level Meters*, International Electrotechnical Commission, IEC 651 (1979).
11. *ISO Recommendations for Preferred Frequencies for Acoustical Measurements*, International Organization for Standardization, ISO/R266-1962(E).
12. *IEC Recommendations for Octave, Half-Octave and Third-Octave Band Filters Intended for the Analysis of Sounds and Vibrations*, International Electrotechnical Commission, IEC 225 (1966).

Note.— *The texts and specifications of these publications, as amended, are incorporated by reference into this attachment.*


IEC publications may be obtained from:

Central Office of the International
Electrotechnical Commission
3 rue de Varembé
Geneva, Switzerland

ISO publications may be obtained from:

International Organization for Standardization
1 rue de Varembé
Geneva, Switzerland

or from State ISO member bodies.



ATTACHMENT D. GUIDELINES FOR EVALUATING AN ALTERNATIVE METHOD OF MEASURING HELICOPTER NOISE DURING APPROACH

Note.— The approach reference procedure of Part II, Chapter 8, 8.6.4 specifies a single approach path angle. This can coincide with the impulsive noise regime for some helicopters and not for others. In order that alternative methods of establishing compliance may be evaluated, States are encouraged to undertake additional measurements as described below.

1. INTRODUCTION

The following guidance material has been prepared for the use of States when obtaining additional information on which a future revision of the approach test procedures of Chapter 8 may be based.

2. APPROACH NOISE EVALUATION PROCEDURE

When conducting such tests the provisions of Chapter 8 shall be observed except as follows.

2.1 Approach reference noise measurement points

A flight path reference point located on the ground 120 m (394 ft) vertically below the flight paths defined in the approach reference procedure. On level ground this corresponds to the following positions:

- a) 2 290 m from the intersection of the 3° approach path with the ground plane;
- b) 1 140 m from the intersection of the 6° approach path with the ground plane;
- c) 760 m from the intersection of the 9° approach path with the ground plane.

2.2 Maximum noise levels

At the approach flight path reference point: the noise level to be calculated by taking the arithmetical average of the corrected levels for 3°, 6° and 9° approaches.


2.3 Approach reference procedure


The approach reference procedure shall be established as follows:

- a) the helicopter shall be stabilized and following approach paths of 3°, 6° and 9°;
- b) the approach shall be made at a stabilized airspeed equal to the best rate of climb speed, V_y , or the lowest approved speed for the approach, whichever is the greater, with power stabilized during the approach and over the flight path reference point, and continued to a normal touchdown;

- c) the approach shall be made with the rotor speed stabilized at the maximum normal operating rpm certificated for approach;
 - d) the constant approach configuration used in airworthiness certification tests, with the landing gear extended, shall be maintained throughout the approach reference procedure; and
 - e) the mass of the helicopter at touchdown shall be the maximum landing mass at which noise certification is requested.
-

ATTACHMENT E. APPLICABILITY OF ANNEX 16 NOISE CERTIFICATION STANDARDS FOR PROPELLER-DRIVEN AEROPLANES¹

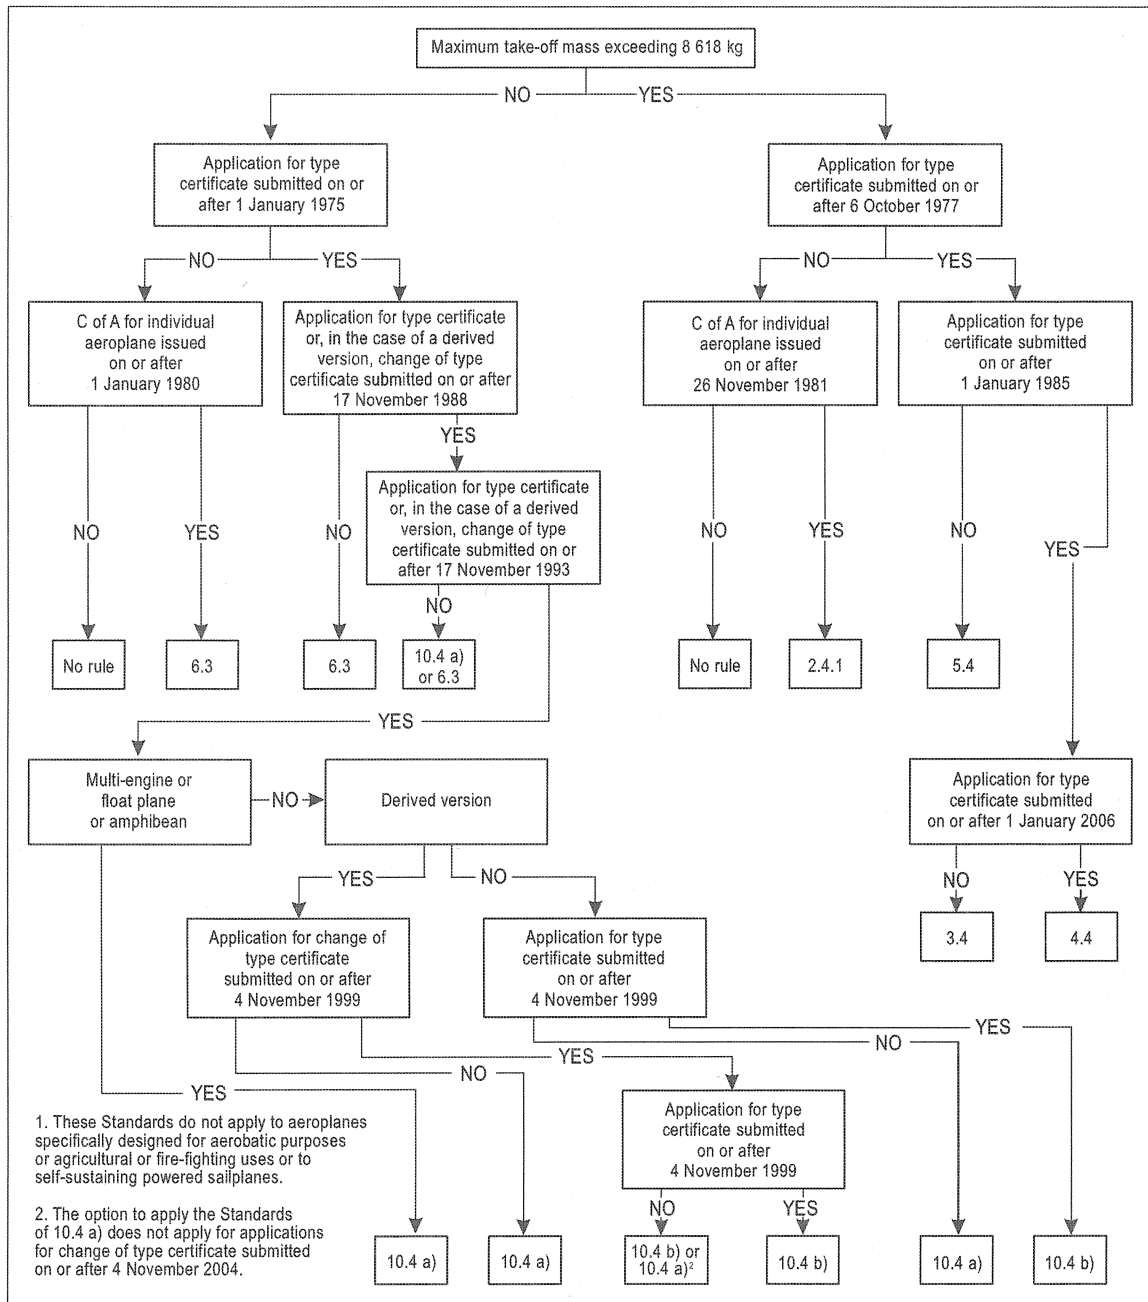



ATTACHMENT F. GUIDELINES FOR NOISE CERTIFICATION OF TILT-ROTOR AIRCRAFT

Note.— See Part II, Chapter 13.

Note 1.— These guidelines are applicable to heavier-than-air aircraft that can be supported in flight chiefly by the reactions of the air on two or more power-driven rotors on axes which can be changed from substantially vertical to horizontal.

Note 2.— These guidelines are not intended to be used for tilt-rotor aircraft that have one or more configurations that are certificated for airworthiness for STOL only. In such cases, different or additional guidelines would likely be needed.

1. APPLICABILITY

The following guidelines should be applied to all tilt-rotor aircraft, including their derived versions, for which the application for a Type Certificate was submitted on or after 13 May 1998.

Note.— Certification of tilt-rotor aircraft which are capable of carrying external loads or external equipment should be made without such loads or equipment fitted.

2. NOISE EVALUATION MEASURE

The noise evaluation measure should be the effective perceived noise level in EPNdB as described in Appendix 2 of this Annex.

Note.— Additional data in SEL and L_{Amax} as defined in Appendix 4, and one-third octave SPLs as defined in Appendix 2 corresponding to L_{Amax} should be made available to the certifying authority for land-use planning purposes.

3. NOISE MEASUREMENT REFERENCE POINTS

A tilt-rotor aircraft, when tested in accordance with the reference procedures of Section 6 and the test procedures of Section 7, should not exceed the noise levels specified in Section 4 at the following reference points:

- a) *Take-off reference noise measurement points:*
 - 1) a flight path reference point located on the ground vertically below the flight path defined in the take-off reference procedure (see 6.2) and 500 m horizontally in the direction of flight from the point at which transition to climbing flight is initiated in the reference procedure;
 - 2) two other points on the ground symmetrically disposed at 150 m on both sides of the flight path defined in the take-off reference procedure and lying on a line through the flight path reference point.

- b) *Overflight reference noise measurement points:*
- 1) a flight path reference point located on the ground 150 m (492 ft) vertically below the flight path defined in the overflight reference procedure (see 6.3);
 - 2) two other points on the ground symmetrically disposed at 150 m on both sides of the flight path defined in the overflight reference procedure and lying on a line through the flight path reference point.
- c) *Approach reference noise measurement points:*
- 1) a flight path reference point located on the ground 120 m (394 ft) vertically below the flight path defined in the approach reference procedure (see 6.4). On level ground, this corresponds to a position 1 140 m from the intersection of the 6.0 degree approach path with the ground plane;
 - 2) two other points on the ground symmetrically disposed at 150 m on both sides of the flight path defined in the approach reference procedure and lying on a line through the flight path reference point.

4. MAXIMUM NOISE LEVELS

For tilt-rotor aircraft specified in Section 1, the maximum noise levels, when determined in accordance with the noise evaluation method of Appendix 2 for helicopters, should not exceed the following:

- a) *At the take-off flight path reference point:* 109 EPNdB for tilt-rotor aircraft in VTOL/conversion mode with maximum certificated take-off mass, at which the noise certification is requested, of 80 000 kg and over and decreasing linearly with the logarithm of the tilt-rotor aircraft mass at a rate of 3 EPNdB per halving of mass down to 89 EPNdB after which the limit is constant.
- b) *At the overflight path reference point:* 108 EPNdB for tilt-rotor aircraft in VTOL/conversion mode with maximum certificated take-off mass, at which the noise certification is requested, of 80 000 kg and over and decreasing linearly with the logarithm of the tilt-rotor aircraft mass at a rate of 3 EPNdB per halving of mass down to 88 EPNdB after which the limit is constant.

Note 1.— For the tilt-rotor aircraft in aeroplane mode, there is no maximum noise level.

Note 2.— VTOL/conversion mode is all approved configurations and flight modes where the design operating rotor speed is that used for hover operations.

- c) *At the approach flight path reference point:* 110 EPNdB for tilt-rotor aircraft in VTOL/conversion mode with maximum certificated take-off mass, at which the noise certification is requested, of 80 000 kg and over and decreasing linearly with the logarithm of the tilt-rotor aircraft mass at a rate of 3 EPNdB per halving of mass down to 90 EPNdB after which the limit is constant.

Note.— The equations for the calculation of noise levels as a function of take-off mass presented in Section 8 of Attachment A, for Conditions Described in Chapter 8, are consistent with the maximum noise levels defined in these guidelines.

5. TRADE-OFFS

If the maximum noise levels are exceeded at one or two measurement points:

- a) the sum of excesses should not be greater than 4 EPNdB;

- b) any excess at any single point should not be greater than 3 EPNdB; and
- c) any excess should be offset by corresponding reductions at the other point or points.

6. NOISE CERTIFICATION REFERENCE PROCEDURES

6.1 General conditions

6.1.1 The reference procedures should comply with the appropriate airworthiness requirements.

6.1.2 The reference procedures and flight paths should be approved by the certifying authority.

6.1.3 Except in conditions specified in 6.1.4, the take-off, overflight and approach reference procedures should be those defined in 6.2, 6.3 and 6.4, respectively.

6.1.4 When it is shown by the applicant that the design characteristics of the tilt-rotor aircraft would prevent a flight from being conducted in accordance with 6.2, 6.3 or 6.4, the reference procedures should:

- a) depart from the reference procedures defined in 6.2, 6.3 or 6.4 only to the extent demanded by those design characteristics which make compliance with the reference procedures impossible; and
- b) be approved by the certifying authority.

6.1.5 The reference procedures should be established for the following reference atmospheric conditions:

- a) sea level atmospheric pressure of 1 013.25 hPa;
- b) ambient air temperature of 25°C, i.e. ISA + 10°C;
- c) relative humidity of 70 per cent; and
- d) zero wind.

6.1.6 In 6.2 d), 6.3 d) and 6.4 c), the maximum normal operating rpm should be taken as the highest rotor speed for each reference procedure corresponding to the airworthiness limit imposed by the manufacturer and approved by the certifying authority. Where a tolerance on the highest rotor speed is specified, the maximum normal operating rotor speed should be taken as the highest rotor speed about which that tolerance is given. If the rotor speed is automatically linked with the flight condition, the maximum normal operating rotor speed corresponding with that flight condition should be used during the noise certification procedure. If the rotor speed can be changed by pilot action, the highest normal rotor speed specified in the flight manual limitation section for power-on conditions should be used during the noise certification procedure for the corresponding flight condition.

6.2 Take-off reference procedure

The take-off reference flight procedure should be established as follows:

- a) a constant take-off configuration, including nacelle angle, selected by the applicant should be maintained throughout the take-off reference procedure;

- b) the tilt-rotor aircraft should be stabilized at the maximum take-off power corresponding to minimum installed engine(s) specification power available for the reference ambient conditions or gearbox torque limit, whichever is lower, and along a path starting from a point located 500 m prior to the flight path reference point, at 20 m (65 ft) above the ground;
- c) the nacelle angle and the corresponding best rate of climb speed, or the lowest approved speed for the climb after take-off, whichever is the greater, should be maintained throughout the take-off reference procedure;
- d) the steady climb should be made with the rotor speed stabilized at the maximum normal operating rpm certificated for take-off;
- e) the mass of the tilt-rotor aircraft should be the maximum take-off mass at which noise certification is requested; and
- f) the reference take-off path is defined as a straight line segment inclined from the starting point (500 m prior to the centre noise measurement point and 20 m (65 ft) above ground level) at an angle defined by best rate of climb (BRC) and the best rate of climb speed corresponding to the selected nacelle angle and for minimum specification engine performance.

6.3 Overflight reference procedure

The overflight reference procedure should be established as follows:

- a) the tilt-rotor aircraft should be stabilized in level flight overhead the flight path reference point at a height of 150 m (492 ft);
- b) a constant configuration selected by the applicant should be maintained throughout the overflight reference procedures;
- c) the mass of the tilt-rotor aircraft should be the maximum take-off mass at which noise certification is requested;
- d) in the VTOL/conversion mode, the nacelle angle at the authorized fixed operation point that is closest to the lowest nacelle angle certificated for zero airspeed, a speed of $0.9V_{CON}$ and a rotor speed stabilized at the maximum normal operating rpm certificated for level flight should be maintained throughout the overflight reference procedure;

Note.— For noise certification purposes, V_{CON} is defined as the maximum authorized speed for VTOL/conversion mode at a specific nacelle angle.

- e) in the aeroplane mode, the nacelles should be maintained on the down-stop throughout the overflight reference procedure, with:
 - 1) rotor speed stabilized at the rpm associated with the VTOL/conversion mode and a speed of $0.9V_{CON}$; and
 - 2) rotor speed stabilized at the normal cruise rpm associated with the aeroplane mode and at the corresponding $0.9V_{MCP}$ or $0.9V_{MO}$, whichever is lesser, certificated for level flight.

Note 1.— For noise certification purposes, V_{MCP} is defined as the maximum operating limit airspeed for aeroplane mode corresponding to minimum engine installed, maximum continuous power (MCP) available for sea level pressure (1 013.25 hPa), 25°C ambient conditions at the relevant maximum certificated mass; and V_{MO} is the maximum operating (MO) limit airspeed that may not be deliberately exceeded.

Note 2.— The values of V_{CON} and V_{MCP} or V_{MO} used for noise certification should be quoted in the approved flight manual.

6.4 Approach reference procedure

The approach reference procedure should be established as follows:

- a) the tilt-rotor aircraft should be stabilized and follow a 6.0 degree approach path;
- b) the approach should be in an airworthiness approved configuration in which maximum noise occurs, at a stabilized airspeed equal to the best rate of climb speed corresponding to the nacelle angle, or the lowest approved airspeed for the approach, whichever is the greater, and with power stabilized during the approach and over the flight path reference point, and continued to a normal touchdown;
- c) the approach should be made with the rotor speed stabilized at the maximum normal operating rpm certificated for approach;
- d) the constant approach configuration used in airworthiness certification tests, with the landing gear extended, should be maintained throughout the approach reference procedure; and
- e) the mass of the tilt-rotor aircraft at touchdown should be the maximum landing mass at which noise certification is requested.

7. TEST PROCEDURES

7.1 The test procedures should be acceptable to the airworthiness and noise certificating authority of the State issuing the certificate.

7.2 The test procedures and noise measurements should be conducted and processed in an approved manner to yield the noise evaluation measure designated in Section 2.

7.3 Test conditions and procedures should be similar to reference conditions and procedures or the acoustic data should be adjusted, by the methods outlined in Appendix 2 for helicopters, to the reference conditions and procedures specified in this attachment.

7.4 Adjustments for differences between test and reference flight procedures should not exceed:

- a) for take-off 4.0 EPNdB, of which the arithmetic sum of delta 1 and the term $-7.5 \log (QK/Q_r K_r)$ from delta 2 should not in total exceed 2.0 EPNdB; and
- b) for overflight or approach 2.0 EPNdB.

7.5 During the test the average rotor rpm should not vary from the normal maximum operating rpm by more than ± 1.0 per cent during the 10 dB-down time period.

7.6 The tilt-rotor aircraft airspeed should not vary from the reference airspeed appropriate to the flight demonstration by more than ± 9 km/h (5 kt) throughout the 10 dB-down time period.

7.7 The number of level overflights made with a headwind component should be equal to the number of level overflights made with a tailwind component.

7.8 The tilt-rotor aircraft should fly within ± 10 degrees or ± 20 m, whichever is greater, from the vertical above the reference track throughout the 10 dB-down time period (see Figure 8-1 of Part II, Chapter 8).

7.9 The tilt-rotor aircraft height should not vary during overflight from the reference height at the overhead point by more than ± 9 m (30 ft).

7.10 During the approach noise demonstration the tilt-rotor aircraft should be established on a stabilized constant speed approach within the airspace contained between approach angles of 5.5 degrees and 6.5 degrees.

7.11 Tests should be conducted at a tilt-rotor aircraft mass not less than 90 per cent of the relevant maximum certificated mass and may be conducted at a mass not exceeding 105 per cent of the relevant maximum certificated mass. For each of the flight conditions, at least one test must be completed at or above this maximum certificated mass.

ATTACHMENT G. GUIDELINES FOR THE ADMINISTRATION OF NOISE CERTIFICATION DOCUMENTATION

Note.— See Part II, Chapter 1.

1. INTRODUCTION

The following information is provided for the benefit of States that wish to have further guidance on the administration of noise certification documentation. These guidelines are not intended to be applied retroactively, but if States wish to apply the proposed formats retroactively they are free to do so.

2. NOISE CERTIFICATION DOCUMENTATION

2.1 Information to be provided

2.1.1 Chapter 1, 1.5, specifies which information shall, as a minimum, be included in the noise certification documentation. The following provides further guidance on these items. Note that all items must be numbered in accordance with 1.5 and 1.6 of Part II, Chapter 1, using Arabic numbers. This is to facilitate access to the information when the noise certification documentation is issued in a language foreign to the user of the information. Some items are relevant to certain chapters only. In these cases the relevant chapters are indicated in the item.

2.1.2 *Item 1. Name of State*

The name of the State issuing the noise certification documentation. This item should correspond with the information on the certificate of registration and the certificate of airworthiness.

2.1.3 *Item 2. Title of the noise document*

As explained in Section 2.3, several different kinds of documents can be issued depending on the administrative system for implementation of the noise certification documentation. The system chosen will determine the name of the document or documents, for instance “noise certificate”, “noise certification document” or any other title that the State of Registry uses in its administrative system.

2.1.4 *Item 3. Number of the document*

A unique number, issued by the State of Registry, that identifies this particular document in its administration. Such a number will facilitate any enquiries with respect to the document.

2.1.5 *Item 4. Nationality or common mark and registration marks*

The nationality or common mark and registration marks issued by the State of Registry in accordance with Annex 7. This item should correspond with the information on the certificate of registration and the certificate of airworthiness.

2.1.6 *Item 5. Manufacturer and manufacturer's designation of aircraft*

The type and model of the subject aircraft. This item should correspond with the information on the certificate of registration and the certificate of airworthiness.

2.1.7 *Item 6. Aircraft serial number*

The aircraft serial number as given by the manufacturer of the aircraft. This item should correspond with the information on the certificate of registration and the certificate of airworthiness.

2.1.8 *Item 7. Engine manufacturer, type and model*

The designation of the installed engine(s) for identification and verification of the aircraft configuration. It should contain the type and model of the subject engine(s). The designation should be in accordance with the type certificate or supplemental type certificate for the subject engine(s).

2.1.9 *Item 8. Propeller type and model for propeller-driven aeroplanes*

The designation of the installed propeller(s) for identification and verification of the aircraft configuration. It should contain the type and model of the subject propeller(s). The designation should be in accordance with the type certificate or supplemental type certificate for the subject propeller(s). This item is included only in the noise certification documentation for propeller-driven aeroplanes.

2.1.10 *Item 9. Maximum take-off mass and unit*

The maximum take-off mass, in kilograms, associated with the certificated noise levels of the aircraft. The unit (kg) should be specified explicitly in order to avoid misunderstanding. If the primary unit of mass of the State of Design of the aircraft is different from kilograms, the conversion factor used should be in accordance with Annex 5.

2.1.11 *Item 10. Maximum landing mass and unit for certificates issued under Chapters 2, 3, 4, 5 and 12*

The maximum landing mass, in kilograms, associated with the certificated noise levels of the aircraft. The unit (kg) should be specified explicitly in order to avoid misunderstanding. If the primary unit of mass of the State of Design of the aircraft is different from kilograms, the conversion factor used should be in accordance with Annex 5. This item is included only in the noise certification documentation for documents issued under Chapters 2, 3, 4, 5 and 12.

2.1.12 *Item 11. The chapter and section of Annex 16, Volume I, according to which the aircraft is certificated*

The chapter of Annex 16, Volume I, to which the subject aircraft is noise certificated. For Chapters 2, 8, 10 and 11, the section specifying the noise limits should also be included.

2.1.13 *Item 12. Additional modifications incorporated for the purpose of compliance with the applicable noise certification Standards*

This item should contain, as a minimum, all additional modifications to the basic aircraft as defined by Items 5, 7 and 8 that are essential in order to meet the requirements of the chapter of Annex 16, Volume I, to which the aircraft is noise certificated as

given under Item 11. Other modifications that are not essential to meet the stated chapter but are needed to attain the certificated noise levels as given may also be included at the discretion of the certifying authority. The additional modifications should be given using unambiguous references, such as supplemental type certificate (STC) numbers, unique part numbers or type/model designators given by the manufacturer of the modification.

2.1.14 *Item 13. The lateral/full-power noise level in the corresponding unit for documents issued under Chapters 2, 3, 4, 5 and 12*

The lateral/full-power noise level as defined in the relevant chapter. It should specify the unit (e.g. EPNdB) of the noise level, and the noise level should be stated to the nearest tenth of a dB. This item is included only in the noise certification documentation for aircraft certificated to Chapters 2, 3, 4, 5 and 12.

2.1.15 *Item 14. The approach noise level in the corresponding unit for documents issued under Chapters 2, 3, 4, 5, 8 and 12*

The approach noise level as defined in the relevant chapter. It should specify the unit (e.g. EPNdB) of the noise level, and the noise level should be stated to the nearest tenth of a dB. This item is included only in the noise certification documentation for aircraft certificated to Chapters 2, 3, 4, 5, 8 and 12.

2.1.16 *Item 15. The flyover noise level in the corresponding unit for documents issued under Chapters 2, 3, 4, 5 and 12*

The flyover noise level as defined in the relevant chapter. It should specify the unit (e.g. EPNdB) of the noise level, and the noise level should be stated to the nearest tenth of a dB. This item is included only in the noise certification documentation for aircraft certificated to Chapters 2, 3, 4, 5 and 12.

2.1.17 *Item 16. The overflight noise level in the corresponding unit for documents issued under Chapters 6, 8 and 11*

The overflight noise level as defined in the relevant chapter. It should specify the unit (e.g. EPNdB or dB(A)) of the noise level, and the noise level should be stated to the nearest tenth of a dB. This item is included only in the noise certification documentation for aircraft certificated to Chapters 6, 8 and 11.

2.1.18 *Item 17. The take-off noise level in the corresponding unit for documents issued under Chapters 8 and 10*

The take-off noise level as defined in the relevant chapter. It should specify the unit (e.g. EPNdB or dB(A)) of the noise level, and the noise level should be stated to the nearest tenth of a dB. This item is included only in the noise certification documentation for aircraft certificated to Chapters 8 and 10.

2.1.19 *Item 18. Statement of compliance, including reference to Annex 16, Volume I*

A statement that the subject aircraft complies with the applicable noise requirements. Reference should be made to Annex 16, Volume I. In addition to this, reference may be made to national noise requirements.

2.1.20 *Item 19. Date of issuance of the noise certification document*

The date on which the noise certification document was issued.

2.1.21 *Item 20. Signature of the officer issuing it*

The signature of the officer issuing the noise certification document. Other items may be added such as a seal or a stamp.

2.2 Additional information

2.2.1 States may decide to add additional information to the noise certification documentation at their own discretion. Caution should be exercised to ensure that the information provided will not be confused with the official noise certification levels. In particular, noise levels taken under conditions other than the noise certification conditions should be clearly marked as supplementary information. The additional information should be placed in a “remarks” box or in separate boxes. These boxes should *not* be numbered in order to avoid non-standardized numbering and to allow for future modifications to the numbering system. The box or boxes should contain an adequate description of what additional information is provided. Examples of possible additional information are provided in 2.2.2 through 2.2.7.

2.2.2 *Logo and name of the issuing authority*

In order to facilitate recognition, the logo or symbol and the name of the issuing authority may be added.

2.2.3 *Noise limits*

If added, noise limits should be given according to the subject noise requirements and should be quoted, to the nearest tenth of a decibel, in the appropriate unit. If national noise requirements use different limits (more or less stringent), this should be clearly marked, and in order to avoid confusion the ICAO limits should also be quoted.

2.2.4 *Language*

States issuing their noise certification documentation in a language other than English should provide an English translation in accordance with Annex 6.

2.2.5 *References to national requirements*

Reference to national requirements can be combined with Item 18 or can be added as a separate item.

2.2.6 *Other aircraft modifications*

Other modifications from the basic aircraft model as specified under Item 5 and and Items 7 through 10 to aid further identification of the noise configuration can be provided at the discretion of the State of Registry. Note that any modifications required to meet the Standards to which any document is issued should be reported under Item 12.

2.2.7 *Date of expiry*

If the State of Registry limits the validity of the noise certification documentation, it should include the date of expiry.

2.3 Formats for noise certification documentation

2.3.1 In view of the wide variety of administrative needs for systems for noise certification documentation, three alternative standardized options are provided:

- 1) A stand-alone noise certificate in which the mandatory information requirements of Annex 16, Volume I, are contained in a single document.
- 2) Two complementary documents of which one may be the aeroplane flight manual (AFM) or the aircraft operating manual (AOM).
- 3) Three complementary documents.

2.3.2 Option 1. One document

The first option is an administrative system in which the document attesting noise certification takes the form of a separate noise certificate that contains all the items identified in Part II, Chapter 1, 1.5. A standard format is provided in Figure G-1. States using this format may deviate from this where needed to meet their national requirements and/or to include any additional items. It should however be generally similar to Figure G-1. Note that not all items will be mentioned on every noise certificate. For instance, not all Items 13 through 17 will be mentioned on one noise certificate since they are not all applicable to every chapter. Normally, only one certificate per aircraft serial number should be issued and be valid at the same time. If a noise certificate has lost its validity, it should be suspended or revoked to avoid the situation that more than one noise certificate is current for an aircraft. If multiple documents for this option have been issued, it should be easy to determine which document is applicable at any given time.

2.3.3 Option 2. Two complementary documents

2.3.3.1 The second option is an administrative system consisting of two documents in which the first official document attests noise certification but is limited to identification of the aircraft and the statement of compliance, containing only Items 1 through 6 and Items 18 through 20 of 2.1. This can be either in the form of a (limited) noise certificate or in the form of a certificate of airworthiness for those States that include noise requirements in their airworthiness requirements. In the latter case, there is no need for Item 18 (statement of compliance with reference to Annex 16) since compliance is implicit. The numbering of the items in the certificate of airworthiness will be according to the convention in Annex 8. In these cases the remaining items of 2.1 should be transferred to a complementary standardized noise certification document, normally as a page of the AFM or AOM certified by the State of Registry, the format of which can be very similar to that of the noise certificate described under 2.3.2. Therefore the format given in Figure G-1 can equally serve as a standard format for the complementary document, although some items may not be needed.

2.3.3.2 Normally only one set of the two documents should be issued for each aircraft. If a noise certification document has lost its validity, it should be suspended or revoked. If multiple documents have been issued under this option, it should be obvious from the documentation which document is applicable at any given time.

2.3.4 Option 3. Three complementary documents

2.3.4.1 The third option is an administrative system consisting of three documents in which the first official document is identical to the first document of Option 2, 2.3.3.1. It attests noise certification and is therefore also limited to identification of the aircraft and the statement of compliance, containing only Items 1 through 6 and Items 18 through 20 of 2.1. This can be either in the form of a noise certificate or in the form of a certificate of airworthiness for those States that include noise requirements in their airworthiness requirements (with the same observation as in the second option). The remaining items of 2.1 should be transferred to the second and third complementary noise certification documents.

2.3.4.2 The second document, normally presented as a page (or set of following pages) in the AFM or AOM, certified by the State of Registry, list(s) all the configurations operated or forecast to be operated by the aircraft fleet from the date of issuance of the page(s). The fleet is composed of all aircraft that are operated with the same flight manual. The format of the information can be very similar to that of the noise certificate described under 2.3.2, all information corresponding to a given


configuration comprising Item 5 and Items 7 through 17. Each list of parameters corresponding to a given configuration is identified by a “configuration number”, for example “x”. Therefore the format given in Figure G-1 can equally serve for the items concerned, with the addition of the configuration number.

2.3.4.3 The third document under this option is issued according to a national regulatory process. It states that an aircraft with a given serial number has operated in the configuration number “x” since the date of issuance of this third document. If multiple documents for this option have been issued, it should be obvious from the documentation which document is applicable at any given time.

For use by State of Registry		1. <State of Registry>		3. Document number:	
2. NOISE CERTIFICATE					
4. Nationality and registration marks:		5. Manufacturer and manufacturer's designation of aircraft:		6. Aircraft serial number:	
7. Engine:			8. Propeller:*		
9. Maximum take-off mass:		10. Maximum landing mass:*		11. Noise certification Standard:	
kg		kg			
12. Additional modifications incorporated for the purpose of compliance with the applicable noise certification Standards:					
13. Lateral/full-power noise level:*	14. Approach noise level:*	15. Flyover noise level:*	16. Overflight noise level:*	17. Take-off noise level:*	
Remarks:					
18. This noise certificate is issued pursuant to Volume I of Annex 16 to the Convention on International Civil Aviation, in respect of the above-mentioned aircraft, which is considered to comply with the indicated noise Standard when maintained and operated in accordance with the relevant requirements and operating limitations.					
19. Date of issue			20. Signature		

* These boxes may be omitted depending on the noise certification Standard.

Figure G-1. Noise certificate



ATTACHMENT H. GUIDELINES FOR OBTAINING HELICOPTER NOISE DATA FOR LAND-USE PLANNING PURPOSES

1. INTRODUCTION

The following guidance material has been prepared for the use of States wishing to utilize noise certification data, or optional supplementary test data, for land-use planning purposes. The purpose of this guidance material is to assist in the provision of data suitable for the prediction of helicopter noise exposure contours and to support the development of heliport noise abatement operational procedures.

2. DATA COLLECTION PROCEDURES

2.1 Data suitable for land-use planning purposes may be derived directly from Chapter 8 noise certification data. Chapter 8 applicants may optionally elect to acquire data suitable for land-use planning purposes via alternative take-off, approach and/or flyover procedures defined by the applicant and approved by the certificating authority. Alternative flyover procedures should be performed overhead the flight path reference point at a height of 150 m. In addition, an applicant may optionally elect to provide data at additional microphone locations.

2.2 Chapter 11 noise certification data may be provided for land-use planning purposes. Chapter 11 applicants may optionally elect to provide data acquired via alternative flyover procedures at 150 m above ground level. In acquiring data for land-use planning purposes, Chapter 11 applicants should give consideration to acquiring data from two additional microphones symmetrically disposed at 150 m on each side of the flight path and/or additional take-off and approach procedures defined by the applicant and approved by the certificating authority. In addition, an applicant may optionally elect to provide data at additional microphone locations.

2.3 All data provided for land-use planning purposes should be corrected to the appropriate reference conditions via the approved procedures of Chapter 8 and Chapter 11 or, for alternative flight procedures, by appropriate correction procedures approved by the certificating authority.

3. REPORTING OF DATA

3.1 All data provided for land-use planning purposes should be submitted to the certification authority for approval. The approved data and the corresponding flight procedures should be presented as supplementary information in the helicopter flight manual.

3.2 It is recommended that all data provided for land-use planning purposes be presented in terms of average sound exposure level (L_{AE}), as defined in Appendix 4 of this volume, for left sideline, centre line and right sideline measurement points defined relative to the direction of flight for each test pass. Additional data in other noise metrics may also be provided and should be derived in a manner that is consistent with the prescribed noise certification analysis procedure.

— END —

